

6

5

4

3

2

1



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/12/06	


D

D

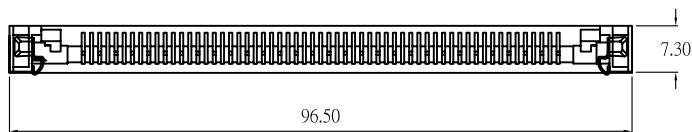


C

C

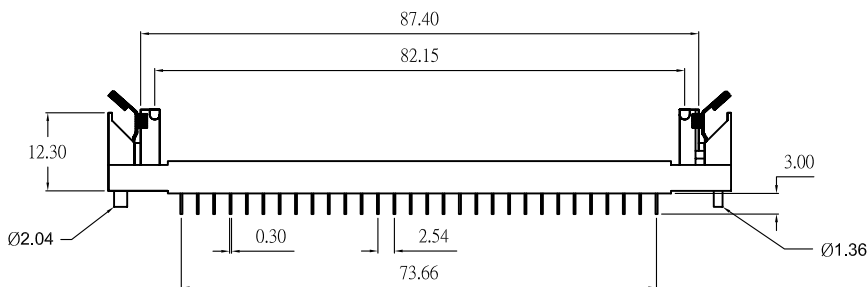

B

B

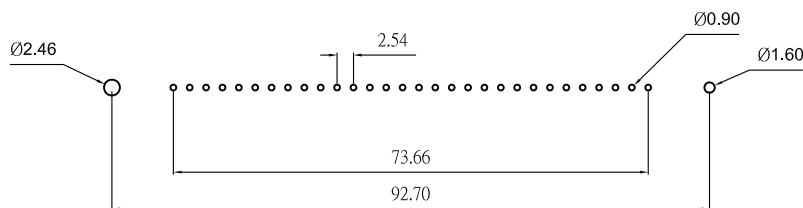

SPECIFICATIONS:

Material:
Insulator: LCP, glass reinforced, rated UL 94V-0
Insulator color: Natural

Contacts: Phosphor Bronze
Plating:

Tin over Copper underplate overall

Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amp max

Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1500 VAC for 1 minute
Operating temperature: -40°C to +100°C

Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 260 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **SIMM Socket, Vertical Mount, Single Row, 30 Pos, Metal Latch, Thumb Lever**

APPROVALS		DATE
DRAWN	SS	5/12/06
CHECKED		
APPROVED		

SIZE X	PART NO. SIMM - 130 - VTL	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

A

A