

Plasma Display Data Book

1993 – 1994
Data
Book

Fujitsu Microelectronics, Inc.
San Jose, California, U.S.A.

©1993 Fujitsu Microelectronics, Inc. San Jose, California

All Rights Reserved.

The information contained in this document has been carefully checked and is believed to be reliable. However, Fujitsu Microelectronics, Inc. assumes no responsibility for inaccuracies.

The information conveyed in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Fujitsu Limited, its subsidiaries, or Fujitsu Microelectronics, Inc.

Fujitsu Microelectronics, Inc. reserves the right to change products or specifications without notice.

No part of this publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu Microelectronics, Inc.

This document is published by the Technical Communications Department, Fujitsu Microelectronics, Inc. 3545 North First Street, San Jose, California, U.S.A. 95134-1804; U.S.A.

Printed in the U.S.A.

Edition 1.0

Plasma Display
Introduction — *At a Glance*

Title	Page
Introduction	1-2
Types of Panels	1-3
High Information Content Displays	1-4
Pursuit of Low Voltage	1-5
Grey Scale Display	1-5

Fujitsu Plasma Display Product

Introduction

Fujitsu Limited, Japan, began research and development for flat panel displays in 1965 and has been mass producing them since 1972. Today, with over 100,000 high-information content displays shipped annually, the Company is the largest worldwide commercial supplier of AC-memory plasma displays. Fujitsu Microelectronics, Incorporated, Electronic Components Division, located in San Jose, California, functions as the marketing arm for the Company's Plasma Display Panels (PDPs) in the United States, Canada, and South America.

Fujitsu chose to focus its efforts on AC-Memory plasma display technology because the resulting panels thin profile, light weight, graphics generation capability and crisp readability best address the future of display technology – high-definition television. Today, Fujitsu Plasma Displays are found in a variety of applications from financial transactions displays (ATMs, POS terminals) and medical instrumentation to factory automation equipment and computer workstations. This wide-range usage is due largely to the panels high reliability and large capacity, coupled with brightness and high contrast. Furthermore, AC-Memory plasma displays employ a non-scanning technology and are inherently immune to electromagnetic interference. These features make them well suited for use in equipment that operates where electromagnetic fields (EMI) are present. Examples of such EMI-Resistant applications include aluminum and steel mills, electrical control rooms, and magnetic resonance medical equipment.

AC-Memory Technology

Plasma display panels are unique from other display technologies because they are powered by emissions generated by a gas discharge. The PDP consists of two glass substrates, each containing an array of electrodes. These substrates are arranged so that the two electrode arrays (X and Y) face each other, separated by a 0.1 mm gap. After the periphery of the substrate assembly is hermetically sealed, neon gas is pumped in. Discharge between the electrodes occurs when 100 to 200 volts as applied to specific X and Y electrodes, causing the neon gas to emit the panel's characteristic orange light.

Types of Panels

Plasma display panels are available as numeric displays, where the electrodes are fixed in an 8-segment configuration, or as graphics displays, where stripe matrix-addressed electrodes cross each other at right angles to form a pixel.

There are two types of plasma displays, classified by panel structure: The DC type, where the electrodes are exposed, and the AC type, where the electrodes are covered by protective insulating layers.

The DC PDP requires lower driving voltage, but its brightness eventually decreases over time due to the lack of an insulating layer to prevent electrode deterioration at the time of discharge. Sometimes the compound Mercury is used as a gas stabilizer inside the panel which presents a health concern. The DC panel also requires a preliminary discharge which brightens surrounding dots and results in the deterioration of display contrast. Furthermore, its intensity decreases markedly as the number of horizontal scan lines increases (Figure 1).

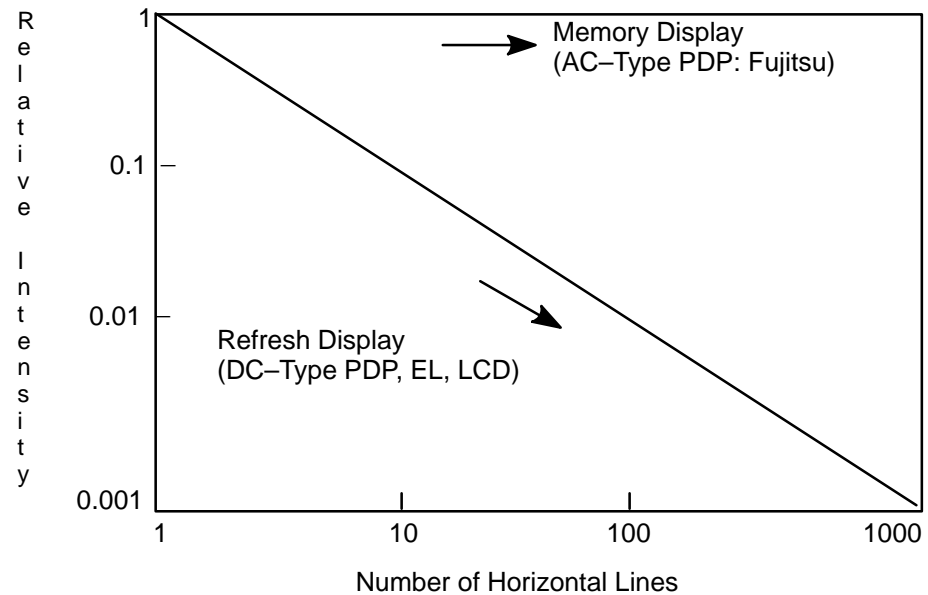


Figure 1 Brightness Comparison Between Memory and Refresh Display

With AC PDs, the protective Magnesium Oxide Layer insulates the electrodes and prevents deterioration of the display brightness level. In addition, the panel memory function stores the electric charge generated at the time of discharge in the protective layer surface. This allows the panel to continue displaying one line even while another is being modified. In effect, once a pixel is lit, it stays lit until another signal turns it off. Therefore, an increased number of scanning lines enables the panel to display a great volume of data over a large surface area with uniform intensity without sacrificing panel brightness.

High Information Content Displays

Fujitsu began manufacturing ultra-high information PDPs in 1989. To respond to the demand for smaller and lighter displays with improved performance for the personal computer and workstation markets. Ultra-high information content displays are characterized as those with 1024 X 768, 1024 X 816, and 1280 X 1024 resolutions.

To keep panel thickness to a minimum, Fujitsu uses a 40V voltage resistant 64-bit LSI to drive the 1024 electrodes. As a result, its standalone 1024 X 768 PDP has a depth of 9cm (3.5") weighs 5kg (11 lbs), and requires only an AC100V to 120V input. While the panel's physical size is impressive, the technology needed to produce it presents some manufacturing challenges.

For example, compared to an LCD display, the PDP requires a higher driving voltage, which increases the driver circuitry cost. In order to reduce the number of drive circuits and bring PDP cost in line with other flat panel technologies used in PC and workstation applications, Fujitsu developed the float-electrode system and low-voltage drive technology.

Reduction of Drive Circuits

Using the float-electrode (capacitance matrix) method, electrodes are scanned in an interlaced pattern to reduce the total number of high-voltage driver ICs. Two capacitors are situated at each end of each row of display electrodes inside the glass substrate (Figure 2). Though these capacitors, two sets of drive electrodes are wired into the matrix.

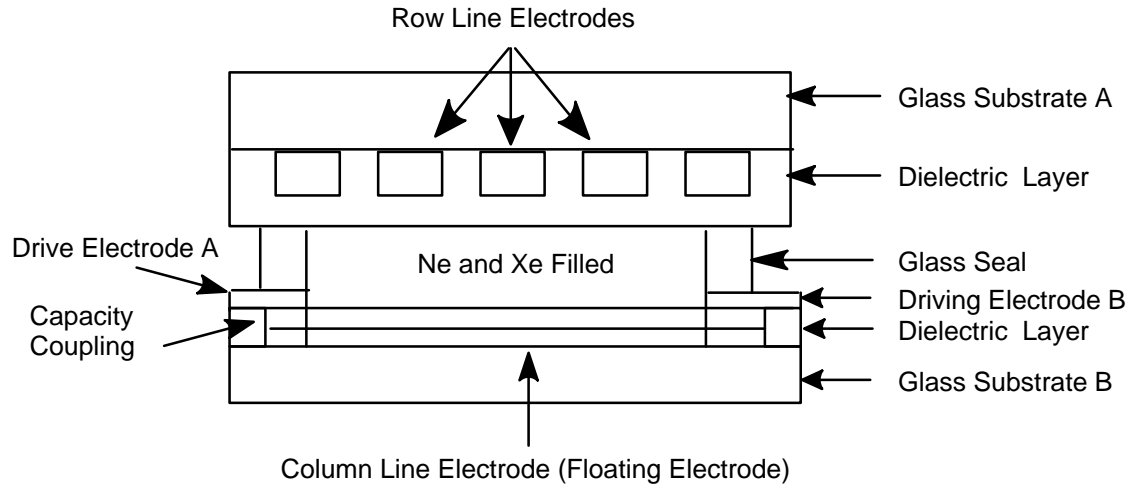


Figure 2 Cross Section of Plasma Display Panel Using Float Electrode Method

When two sets of drive electrodes are combined (voltage is applied), the row display electrode (with both sides of the drive electrodes) reaches selective potential (high voltage) and other display electrodes become half-selective ($1/2$ of applied voltage) or non-selective (zero voltage).

If a voltage waveform sequence selects the application of voltage to display cells only at the intersection of the column electrodes and the high voltage row display electrodes, multiple driving of the row electrode occurs. For example, when a row electrode with 400 lines is driven in a matrix of 20 X 20, row lines of row electrodes are selected and driven in 40 drive circuits. In this manner, the number of row electrode drive circuits is reduced to that of conventional circuits. The advantages are: 1) less power is needed to drive fewer circuits; and, 2) a thinner panel profile.

Pursuit of Low Voltage

The specific features of AC memory drive circuitry also contribute to obtaining low drive voltage. After lighting all the dots on one row electrode, simultaneous application of an erase voltage pulse to the row electrode and erase cancel electrode enables selective cancellation with low voltage. This erase cancel address method reduce drive voltage from 100V to 30V and creates highly integrated, miniaturized drive LSIs at a lower cost..

Grey-Scale Display

Fujitsu also developed gray-scale display technologies that utilize multiple gradation application software. DC PDPs achieve gradation display by using pulse duration modulation, which varies the discharging time. With AC PDPs, gradation is obtained by frequency modulation, which varies the number of discharges.

For example, with four-level grey scale, a small number of discharges (which produce low brightness) and a large number of discharges (which produce high brightness) are displayed alternatively on two display screens at a high speed. This combination produce for levels of brightness. Displaying one frame on three screens with different brightness produces eight gradations, and on four screens; 16 gradations.

In PDP gradation, the gray scale level is stable and the display brightness is proportional to the number of discharges. In either the pulse duration modulation or frequency modulation method, more than 64 gradations are theoretically possible. However, a newly developed drive method technology for Ac multigradation eliminates the need for frame memory.

VGA Compatibility: Ease of Design

While modifications in panel design have enhanced the use of plasma displays in PC and workstation environments, VGA compatibility and design-in time are other important factors. Since CRTs and the flat panels don't communicate with the host system in exactly the same way, each requires its own semi-custom, flat panel display controller card. Fujitsu eliminates the problem and reduces the video subsystem cost by making its displays compatible with readily available standard VGA graphics cards. It is only necessary to slightly modify the video BIOS and obtain a simple capable assembly to make the Fujitsu plasma display plug compatible with a CRT used for VGA applications.

Future Developments


Fujitsu is continuing its plasma display R&D with efforts to attain finer dot pitch and produce new driver ICs. A new gradation technology is also under development. Color PDPs are currently being engineered, with production for the US market expected to begin by 1Q'93.

VGA is a registered trademark of International Business Systems, Incorporated

**Plasma Display
Unit—Character Type — *At a Glance***

Device	Page
FPC4012NRUL-01	2-3

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Monolithic IC driver
- Power-saving features
- Space-saving size and shape
- High reliability

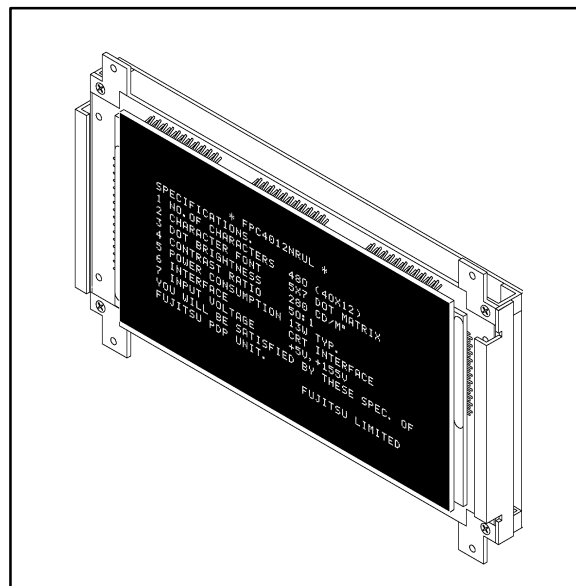

The block diagram illustrates the system architecture for the FPC4012NRPL. It features a central **Main Controller** that interfaces with various components:

- Inputs:** $\overline{V_{SYNC}}$, $\overline{H_{SYNC}}$, **DISPLAY ENABLE**, \overline{CLK} , **DATA0**, **DATA1**, **DATA2**, **DATA3**, and **DATA4**.
- Interface Coupler:** Connects the Main Controller to the Logic LSI and the Sustain Driver.
- Logic LSI:** Receives data from the Main Controller and the Interface Coupler. It outputs signals 1, 2, 3, ..., 94, 95, 96 to the Line Driver.
- Line Driver:** Receives signals from the Logic LSI and outputs them to the Plasma Display Panel.
- Timing Generator:** Receives signals from the Main Controller and outputs to the Sustain Driver.
- Sustain Driver:** Receives signals from the Timing Generator and outputs to the Line Driver.
- Plasma Display Panel (FPC4012NRPL):** A 40 characters \times 12 lines panel that receives signals from the Line Driver.
- DC-DC Converter:** Receives V_{CC} and SG1, and outputs V_S and V_{CCf} .
- Voltage Adjust Circuit:** Receives V_{CCf} and outputs V_W .
- Logic LSI (Bottom):** Receives $\overline{H_{CLK2}}$ and $\overline{H_{DATA0-4}}$ from the Main Controller. It outputs signals 1, 2, 3, 4, ..., 200 to the Line Driver.

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Display Power Voltage	V_O	170 V
Logic Power Voltage	V_{CC}	7.0 V
Logic 1 Voltage	V_{IH}	5.5 V
Logic 0 Voltage	V_{IL}	-0.5 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Display Power Voltage	V_O	147	155	165	V
Display Power Current ($V_O = 155$ V)	I_S	—	60	75	mA
Logic Power Voltage	V_{CC}	4.75	5.0	5.25	V
Logic Power Current ($V_{CC} = 5.5$ V)	I_{CC}	—	0.6	0.65	A
Logic 1 Voltage	V_{IH}	2.4	—	5.25	V
Logic 1 Current ($V_{IH} = 3.0$ V)	I_{IH}	—	—	80	μ A
Logic 0 Voltage	V_{IL}	0	—	0.4	V
Logic 0 Current ($V_{IL} = 0.4$ V)	I_{IL}	—	—	-3.2	mA

Note: The maximum display power current is measured by displaying Bs at all positions.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Display Panel	FPC4012NRPL
Number of Characters	480 (40 characters/line × 12 lines)
Character Size	2.7 mm × 3.9 mm
Character Font	5 × 7 dot matrix + cursor
Character Spacing	Row Spacing: 2 dots Line Spacing: 4 dots
Effective Display Screen Size	166.2 (width) × 77.4 (height)
Dot Pitch	0.635 (H) × 0.6 (V) mm
Display Color	Neon Orange
Dot Brightness	280 cd/m ² typ.
Average Character Brightness	75 cd/m ² typ.
Contrast Ratio	50:1
Viewing Angle	120 deg. min.
Weight	1.2 kg (approx.)
External Dimensions	See External Dimensions figure

Performance Specifications


Item	Value
Ambient Temperature	−5 to +50 °C
Storage Temperature	−20 to +70 °C
Humidity	20 to 85% RH
Ambient Pressure Operation: Non-operation:	550 to 800 torr 250 to 800 torr
Vibration Frequency: Acceleration: Time:	10 to 55 Hz 2 G max. Operation: 5 min. in X, Y, and Z direction Non-operation: 2 hours in X, Y, and Z direction
Shock (non-operation) Acceleration: Time:	40 G max. 11 msec max.

Physical Construction and Operation

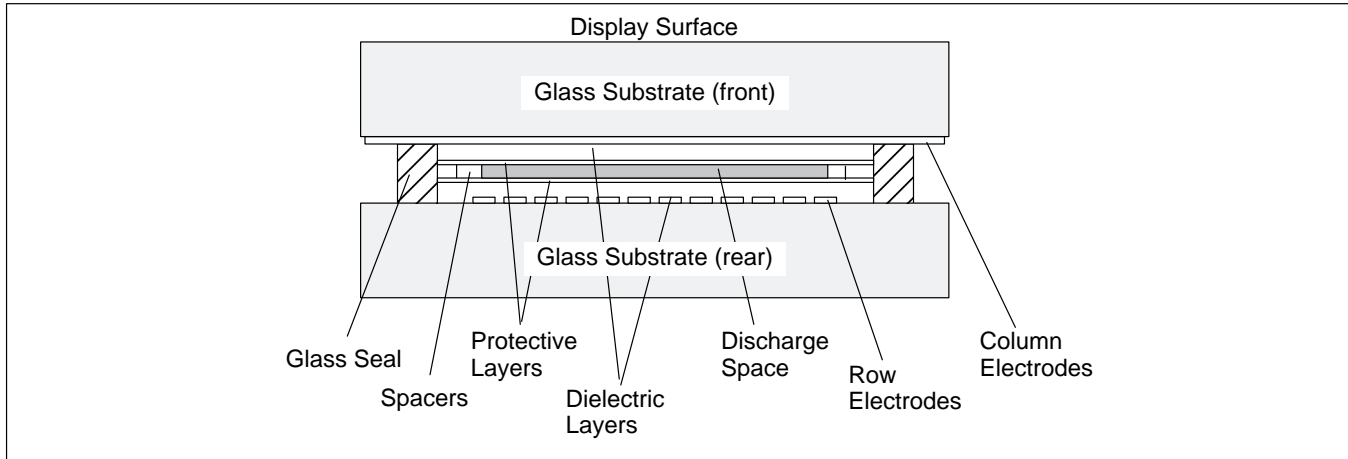

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

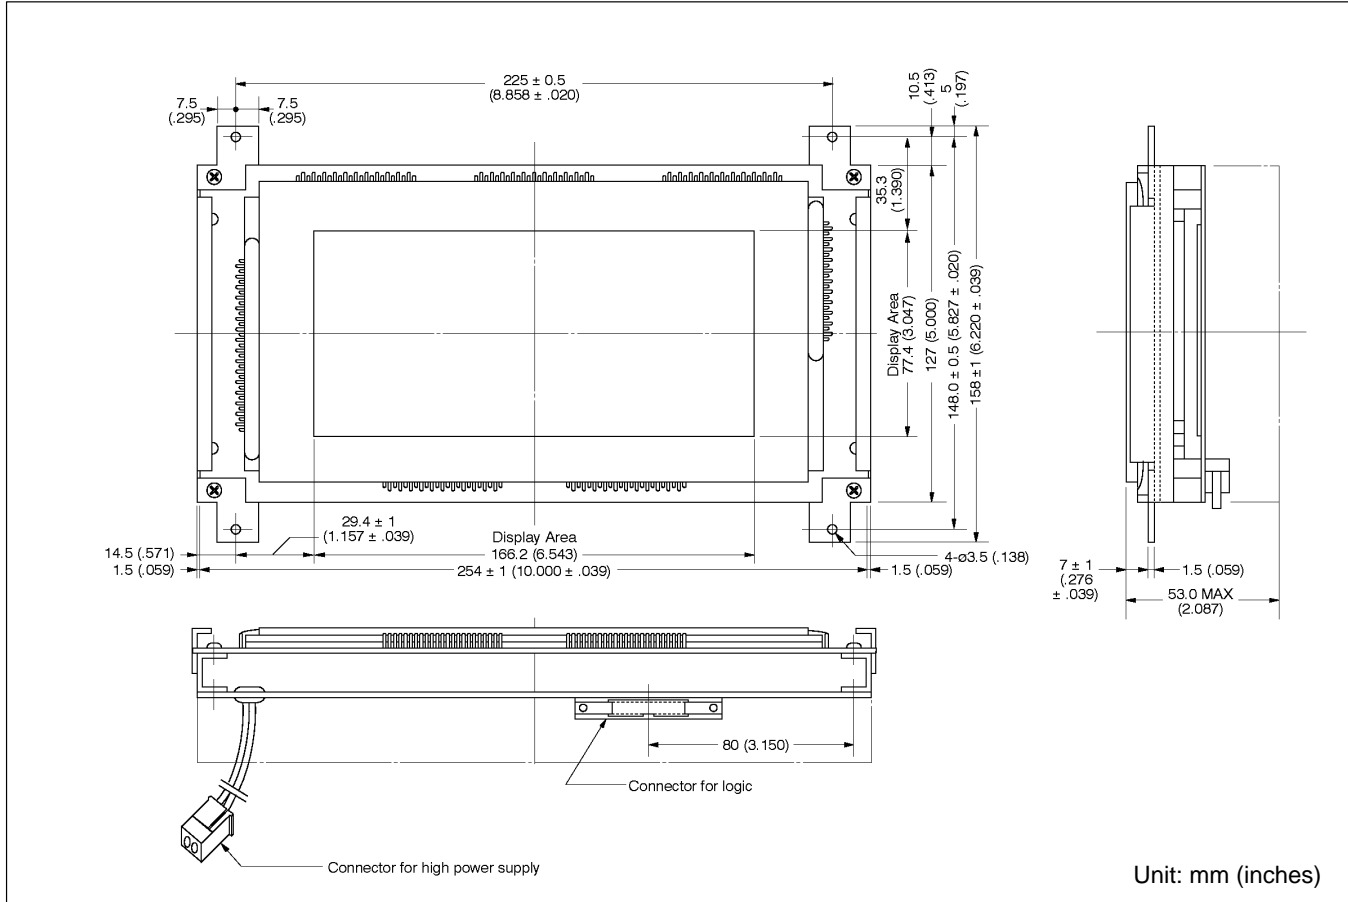


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Definition and Function
Character Data	(DATA 0 to 4)	Character dot pattern (5 dots) input signal. Character dot data is read into the unit's register in order from character 1 to character 40 at the rising edge of each clock signal. Data is displayed when these signals are at logic 1 level; nothing is displayed when signals are at logic 0 level.
Clock	CLK	Input signal for controlling input timing of character data. Character dot data is read into the unit when the clock signal rises.
Line Synchronous Signal	$\overline{H_{SYNC}}$	Input signal for controlling scan timing of line electrodes. When each pulse falls, the address is changed to the next line electrode.
Screen Synchronous Signal	$\overline{V_{SYNC}}$	Input signal for controlling refresh speed of the screen. The scan position returns to line 1 when the $\overline{V_{SYNC}}$ signal falls.
Display Enable	(DE)	Regardless of the status of other signals, data is erased when this signal is at logic 0 level.

Relationship Between Display Data and Display Dots

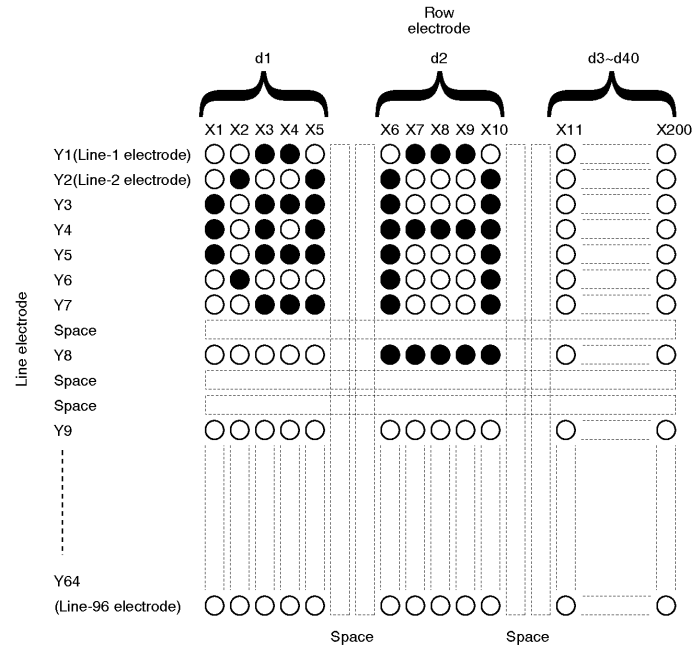


Interface Signal Timing

Symbol	Min.	Max.	Unit
T_{VSYNC}	—	16.7	ms
t_A	1	—	μs
T_{HSYNC}	150	190	μs
tB/T_{HSYNC}^*	10	30	%
t_1	1	—	μs
t_2	1	—	μs
T_{clk}	1000	—	ns
t_{WL}, t_{WH}	200	—	ns
t_3	100	—	ns
t_4	800	—	ns
t_{su}	150	—	ns
t_h	80	—	ns

Note: *The typical value for tB/T_{HSYNC} is approximately 20%.

Interface Signal Timing Chart

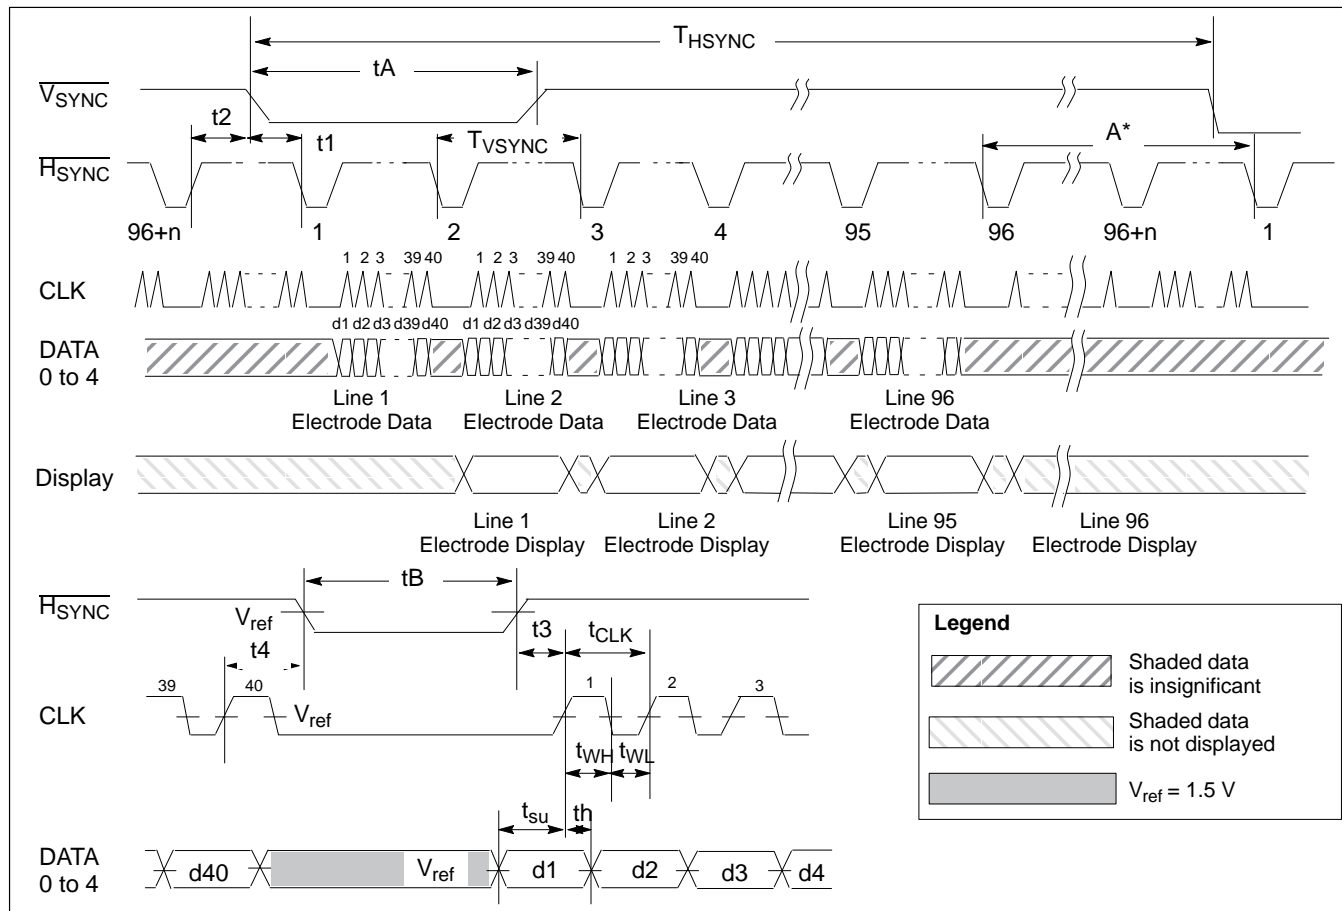

Note: *Equivalent to retrace time in a CRT, but not necessary in this unit. Brightness is increased by reducing this period.

CONNECTOR PIN ASSIGNMENT

Logic Connector

FCN-705P026-AU/M (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	V _{CC} (+5 V)	2	V _{CC} (+5 V)
3	V _{CC} (+5 V)	4	V _{CC} (+5 V)
5	V _{CC} (+5 V)	6	V _{CC} (+5 V)
7	SG1	8	SG1
9	DATA0	10	SG1
11	DATA1	12	SG1
13	DATA2	14	SG1
15	DATA3	16	SG1
17	DATA4	18	SG1
19	CLK	20	SG1
21	$\overline{F_{\text{SYNC}}}$	22	SG1
23	$\overline{V_{\text{SYNC}}}$	24	SG1
25	DISPLAY ENABLE	26	SG1

High Power Supply Connector

Pin No.	Signal
1	V _O (+155 V)
2	NC
3	SG2

Applicable Connectors:
Housing: FCN-813J003-A (Fujitsu)
Contact: FCN-813J-T/Q (Fujitsu)

**Graphic Unit—
Small Size — *At a Glance***


Device	Page
FPF4015NRUF	3-3

FPF4015NRUF


Plasma Display Unit

The FPF8050HFUGA plasma graphics display unit consists of an AC memory-type display panel with associated driver circuitry. This unit uses a multiplex drive to provide a generous 320 X 120 full-dot matrix. Dielectric strength monolithic ICs are used for the drive circuits, and CMOS LSI's are used for the control logic, making the unit more compact and reliable. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. Because the interface is set up to match standard CRTs, the unit can be easily connected to all types of equipment.

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Monolithic IC driver
- Power saving features
- Space-saving size and shape
- High reliability

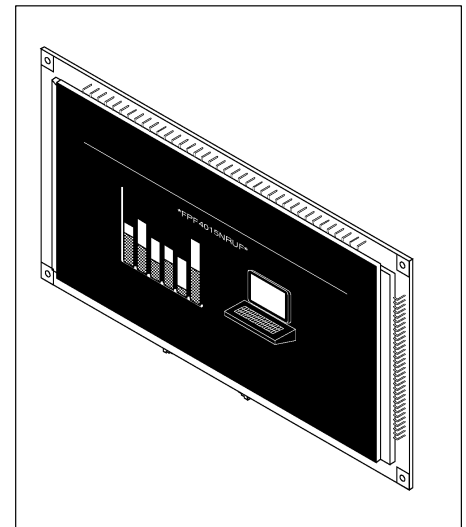

BLOCK DIAGRAM

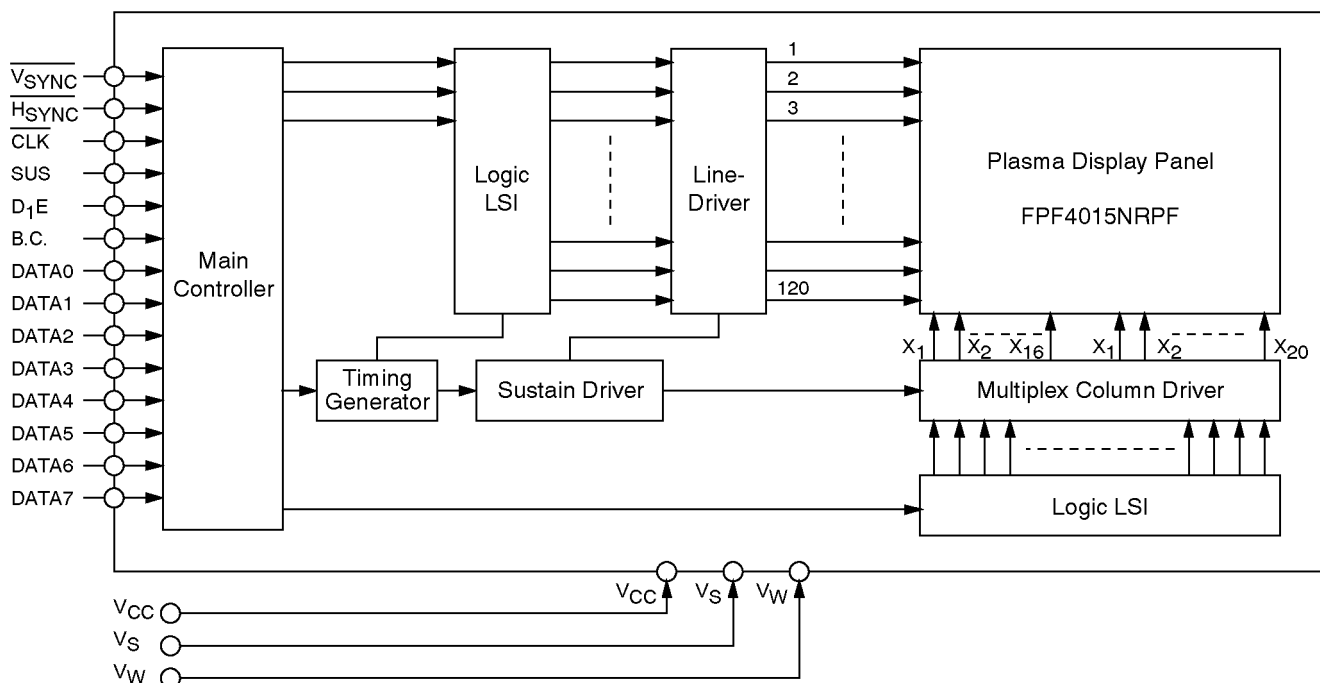

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Display Supply Voltage 1	V_S	110 V
Display Supply Voltage 2	V_W	155 V
Logic Supply Voltage		7.0 V
Logic 1 Input Voltage	V	5.5 V
Logic 0 Input Voltage	V	-0.5 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Display Supply Voltage 1	V_S	—	90 ¹	—	V
Display Supply Current 1 ($V_S = 90$ V)	I_S	—	—	140	mA
Display Supply Voltage 2	V_W	—	140 ²	—	V
Display Supply Current 2 ($V_W = 135$ V)	I_W	—	—	30	mA
Logic Supply Voltage	V_{CC}	4.75	5.0	5.25	V
Logic Supply Current ($V_{CC} = 5.5$ V)	I_{CC}	—	—	0.8	A
Logic 1 Input Voltage	V_{IH}	2.4	—	5.25	V
Logic 1 Input Current ($V_{IH} = 3.0$ V)	I_H	—	—	80	μ A
Logic 0 Input Voltage	V_{IL}	0	—	0.4	V
Logic 0 Input Current ($V_{IL} = 0.4$ V)	I_{IL}	—	—	-5.5	mA

Notes: ¹The power source is required to be variable from 80 to 100 VDC.

²The power source is required to be variable from 130 to 150 VDC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of Display Dots	320 (H) X 120 (V) dots (38,000 dots)
Dot Pitch	0.6 mm
Dot Size	Approx 0.3 mm dia
Effective Screen Size	191.4 X 71.4 mm
Display Color	Neon Orange
Dot Brightness (peak)	280 cd/m ² typ
Contrast Ratio	20:1 min.
Viewing Angle	120° min.
Display Capacity	33% (12,800 dots) max
External Dimensions	See External Dimensions Figure
Weight	0.8 kg

Performance Specifications


Item	Value
Operating Temperature	–5 to +50°C
Storage Temperature	–20 to 70°C
Humidity	20 to 80% RH (no condensation)
Atmospheric Pressure	
Operation:	700 to 1114 mb
Non–Operation:	340 to 1114
Vibration	
Frequency:	10 to 55 Hz
Acceleration:	2 G max
Time:	Operation: 5 min in X, Y and Z direction Non–Operation: 2 hours in X, Y and Z direction
Shock (non–operation)	
Acceleration:	40 G max
Time:	11 msec max

Physical Construction and Operation

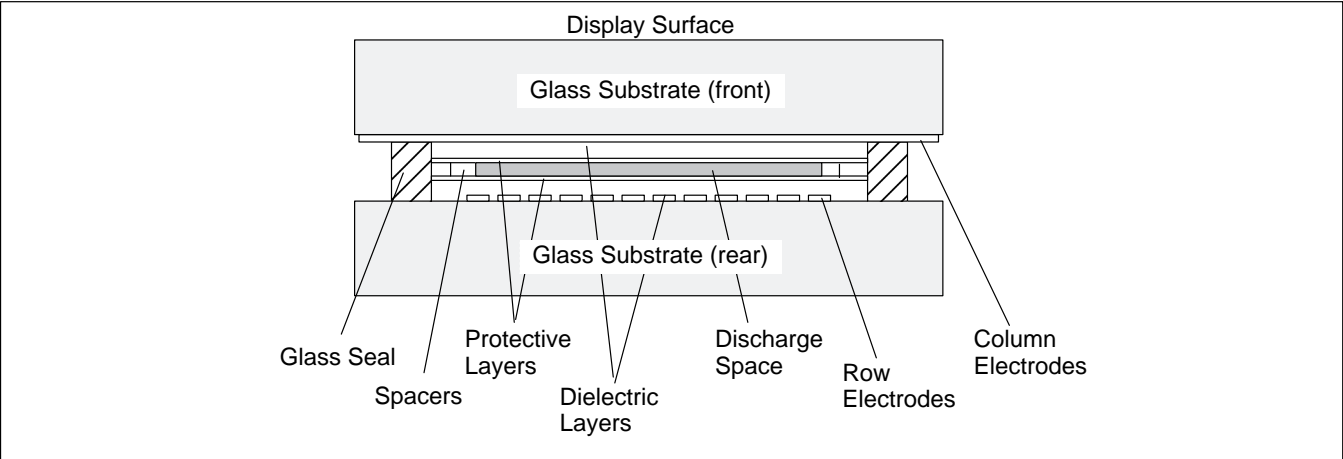

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

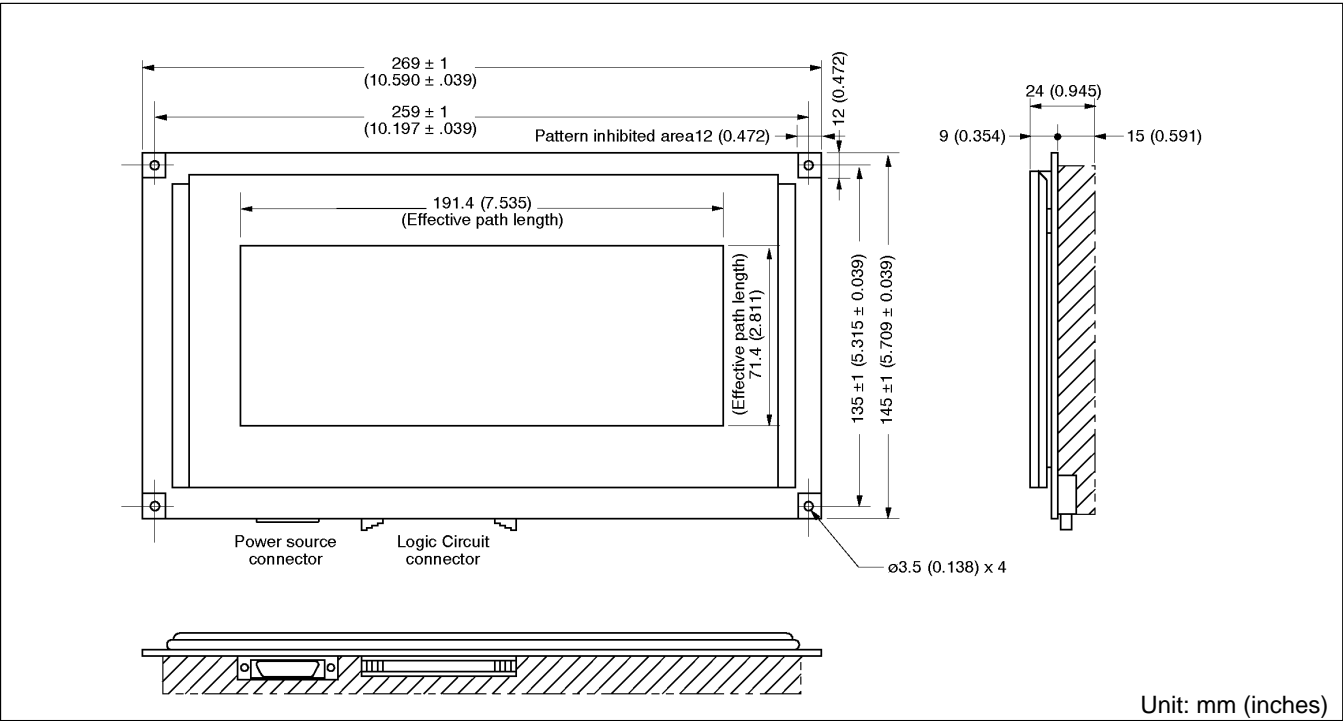

INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Definition and Function
Display Data Signal	DATA	Dot matrix display data, which comprises of 8-bit parallel signals, is read at the rise of each CLK signal into the shift register in order from display blocks 1 to 15. Dots light up at logic 1 and turn off at logic 0.
Clock Signal	CLK	The CLK signal is the input signal used to control display data input timing. Dot data is read into the unit at the rise of each CLK signal.
Line Synchronous Signal	$\overline{H_{SYNC}}$	The $\overline{H_{SYNC}}$ signal is the input signal used to control column electrode scan timing. Addressing is shifted to the next column electrode at the fall of each $\overline{H_{SYNC}}$ signal.
Frame Synchronous Signal	$\overline{V_{SYNC}}$	The $\overline{V_{SYNC}}$ signal is the input signal used to control the screen refresh speed. Scanning returns to the first column electrode at the fall of each $\overline{V_{SYNC}}$ signal.
Brightness Control Signal	B.C.	The BRIGHTNESS CONTROL signal controls the display screen brightness. The screen goes to 100% brightness at logic 1 and to 50% at logic 0.
Display Enable	D. ENABLE	The DISPLAY ENABLE signal controls whether or not data is displayed, and overrides other signals. Display is enabled at logic 1 and disabled at logic 0.

			1st character									2nd character																		40th character								
			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	-----									X								
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18										320								
1st display block	D A T A	0 Y1	○	●	●	●	○	○	○	○	○	○	●	●	●	○	○	○	○	○	○	●	·	·	·	●	○	○	○	●	○	○	○					
		1 Y2	●	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	●	○	○	○	○	○	○					
		2 Y3	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
		3 Y4	○	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
		4 Y5	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
		5 Y6	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
		6 Y7	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
		7 Y8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○					
2nd display block	D A T A	0 Y9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		1 Y10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		2 Y11	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		3 Y12	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		4 Y13	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		5 Y14	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		6 Y15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		7 Y16	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
15th display block	D A T A	0 Y113	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		1 Y114	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	○	○	○	○	○	○	○						
		2 Y115	○	○	○	○	○																															

Interface Signal Timing Table

Symbol	Min	Max	Unit
T_{VSYNC}	—	—	ms
t_A	1	—	μs
T_{Hsync}	180	200	μs
t_B	5	—	μs
t_1	1	—	μs
t_2	4	—	μs
T_{CLK}	1000	—	ns
$t_{wh,twl}$	250	—	ns
t_3	100	—	ns
t_4	4	—	μs
t_{su}	150	—	ns
t_h	100	T_{CLK}	ns

CONNECTOR PIN ASSIGNMENT**Logic Connector****FCN-705Q034-AU/M**

Pin No.	Symbol	Pin No.	Symbol
1	V _{CC}	2	V _{CC}
3	V _{CC}	4	V _{CC}
5	DATA0	6	SG1
7	DATA1	8	SG1
9	DATA2	10	SG1
11	DATA3	12	SG1
13	DATA4	14	SG1
15	DATA5	16	SG1
17	DATA6	18	SG1
19	DATA7	20	SG1
21	CLK	22	SG1
23	$\overline{H_{\text{SYNC}}}$	24	SG1
25	$\overline{V_{\text{SYNC}}}$	26	SG1
27	B.C.	28	SG1
29	SUS	30	SG1
31	$\overline{\text{D. ENABLE}}$	32	SG1
33	N.C.	34	N.C.

Power Source Connector**FCN-365P016-AU**

Pin No.	A	B
1	V _S	V _S
3	GND	GND
4	GND	GND
5	GND	GND
6	GND	GND
7	V _W	V _W
8	V _W	V _W

Graphic Units
(640 by 400 dots) — *At a Glance*


Device	Page
FPF8050HFUGA	4-3
FPF8050HRUC-001	4-13
FPF8050HRUD-001	4-25
FPF8050HRUD-101	4-35
FPF8050HRUE-121	4-45
FPF8050HRUK	4-57
FPF8050HRUM	4-67

FPF8050HFUGA


Plasma Display Unit

The FPF8050HFUGA plasma graphics display unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. This compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HFUGA a highly reliable display device.

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

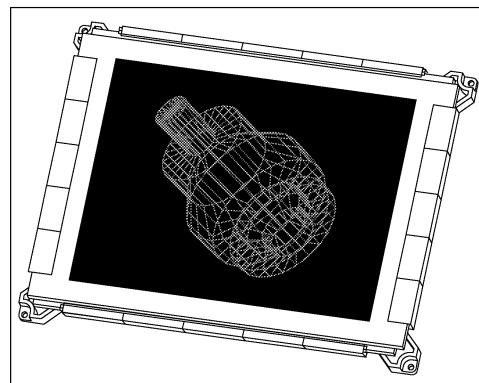

BLOCK DIAGRAM

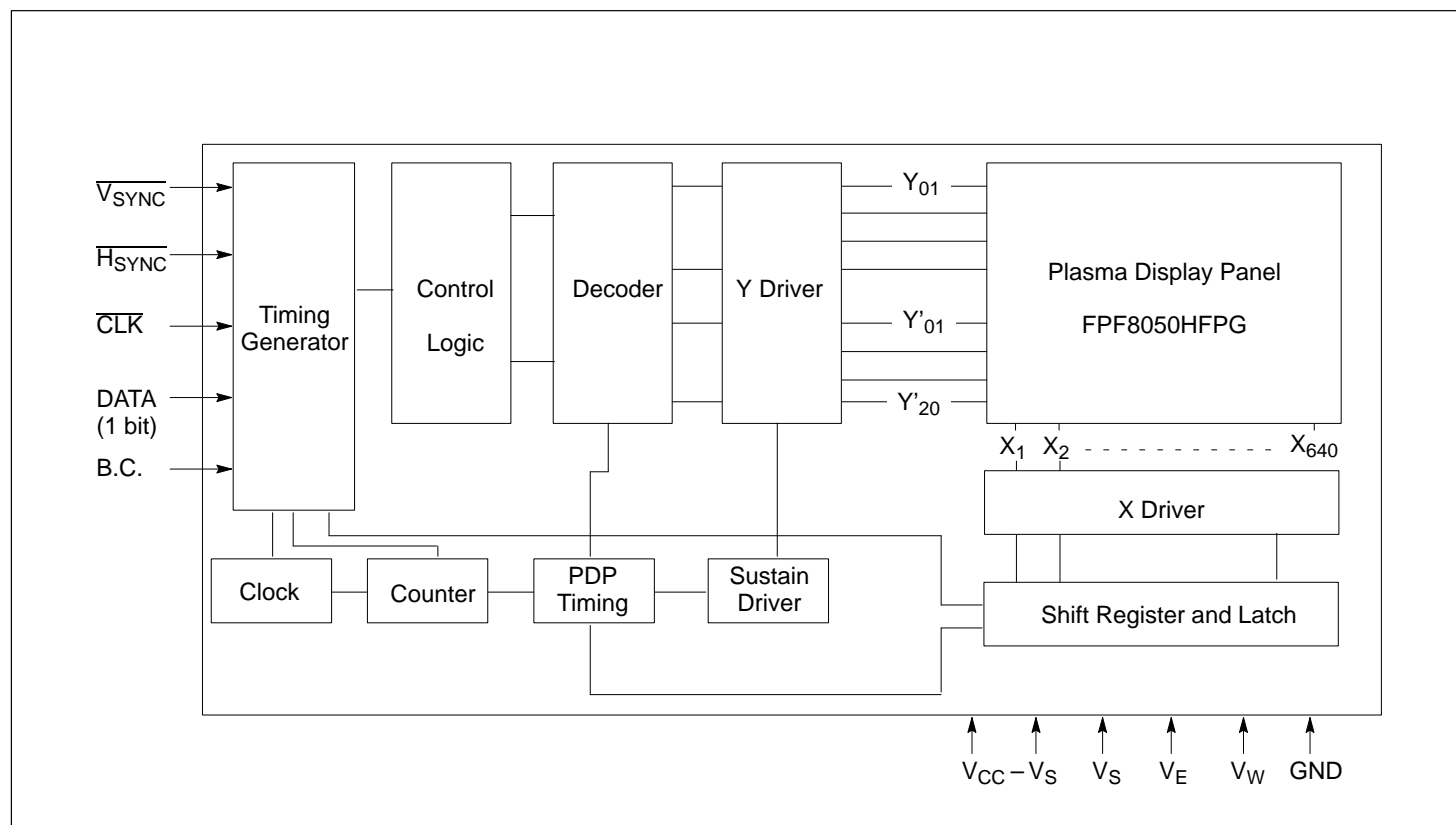

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain Voltage 1	V_S	125 V
Sustain Voltage 2	$-V_S$	-125 V
Write Voltage	V_W	180 V
Erase Voltage	V_E	45 V
Logic Voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage 1 for Sustain	V_S	85	95 ¹	105	V
Supply Current 1 for Sustain ($V_S = 95$ V)	I_S	—	75	160	mA
Supply Voltage 2 for Sustain	$-V_S$	-85	-95 ²	-105	V
Supply Current 2 for Sustain ($-V_S = -95$ V)	$-I_S$	—	-75	-160	mA
Supply Voltage for Writing	V_W	150	165 ³	175	V
Supply Current for Writing ($V_W = 165$ V)	I_W	—	10	20	mA
Supply Voltage for Erase	V_E	38	40	42	V
Supply Current for Erase ($V_E = 40$ V)	I_E	—	100	150	mA
Supply Voltage for Logic	V_{CC}	—	5.0	5.25	V
Supply Current for Logic ($V_{CC} = 5$ V)	I_{CC}	—	0.35	0.5	A
Signal Input Voltage (H-Level)	V_{IH}	2.4	—	5.25	V
Signal Input Current (H-Level) ($V_{IH} = 2.75$ V)	I_{IH}	—	—	20	μ A
Signal Input Voltage (L-Level)	V_{IL}	—	—	0.4	V
Signal Input Current (L-Level) ($V_{IL} = 0.4$ V)	I_{IL}	—	—	-16	mA

Notes: ¹The power source is required to be variable from 85 to 105 VDC.

²The power source is required to be variable from -85 to -105 VDC.

³The power source is required to be variable from 150 to 175 VDC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Display Panel	FPF8050HFPG
Number of Display Dots	640 (H) × 400 (V) dots (256,000 dots)
Dot Pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot Size	0.2 mm (0.008 in.) dia.
Effective Screen Area	132 (V) × 211 (H) mm (5.197 × 8.307 in.)
Dot Brightness (peak)	150 cd/m ²
Contrast Ratio	20:1 min.
Viewing Angle	160° min.
Weight	1.7 kg
External Dimensions	See External Dimensions Figure

Performance Specifications


Item	Value
Operating Temperature	0 to +50°C
Operating Humidity	20 to 85% RH
Storage Temperature	−20 to +70°C
Storage Humidity	20 to 85% RH
Atmospheric Pressure	Non-Operation: 340 to 1114 hPa
Vibration	2 G
Shock	40 G

Physical Construction and Operation

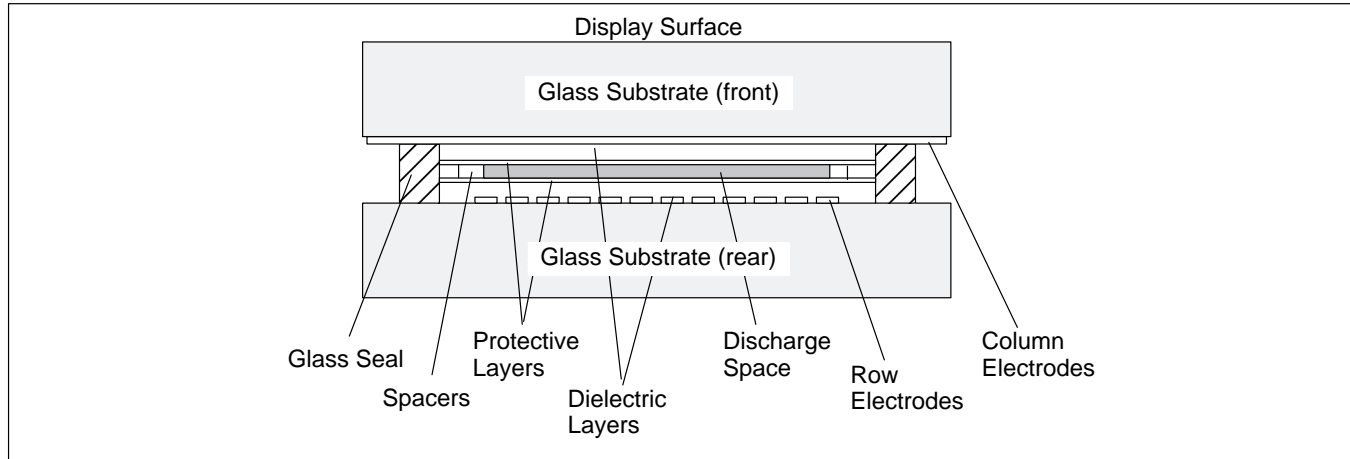

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

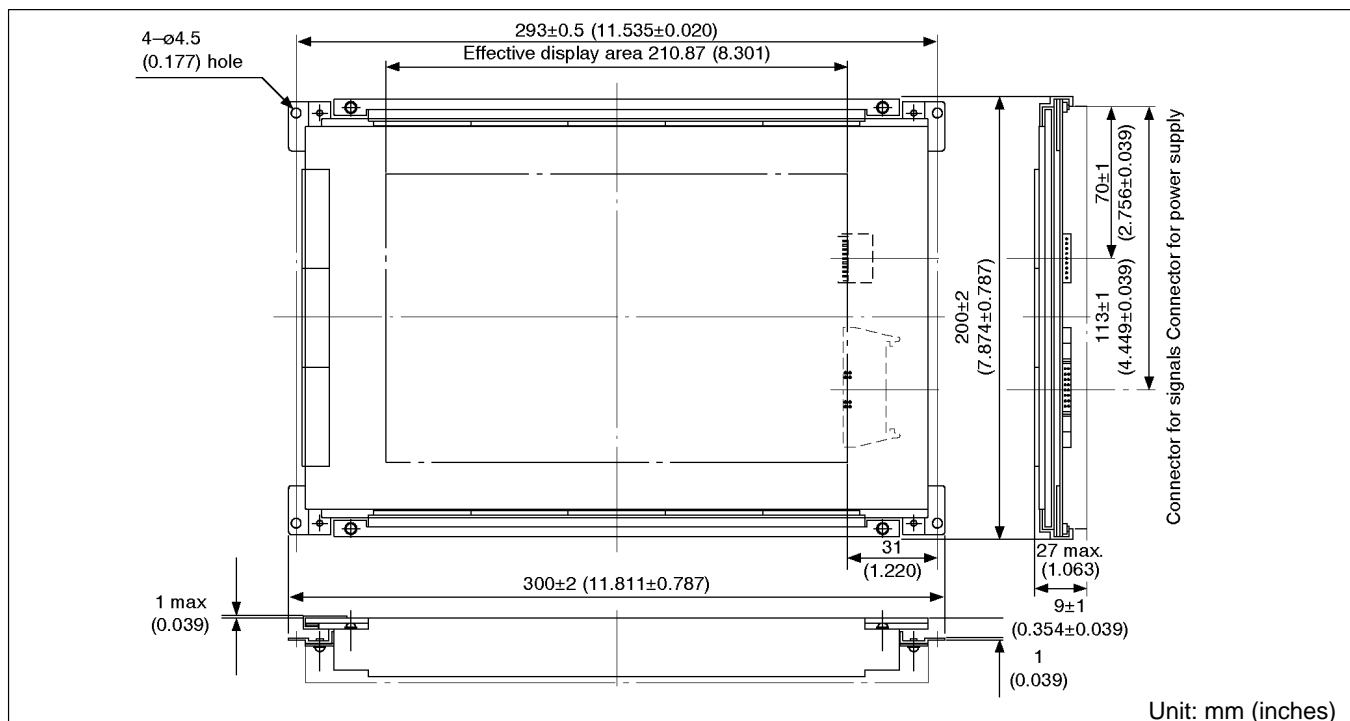


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Definition and Function
Display Data Signal	DATA	The serial dot data which is input synchronized with the leading edge of the clock signal. Dots are lit at logical High and are not lit at logical Low. The relationship between display data and display dots is shown in the following figure.
Clock Signal	CLK	The input signal which controls the input timing of the display data. Dot data is read into the shift register at the leading edge of the signal. The number of clock signals during the period $\overline{H}_{\text{SYNC}}$ is 640.
Line Synchronous Signal	$\overline{H}_{\text{SYNC}}$	The input signal which controls the scanning timing of the line electrode. Address increment to select the next line electrode is done at the trailing edge of each signal.
Frame Synchronous Signal	$\overline{V}_{\text{SYNC}}$	The input signal which controls the refresh speed of the screen. The scanning position returns to the first line electrode (home position) at the trailing edge of the $\overline{V}_{\text{SYNC}}$.
Brightness Control Signal	B.C.	The input signal which controls the screen brightness. Brightness is at its maximum at logic High, and is 50% of the maximum at logic Low.

Relationship Between Display Data and Display Dots

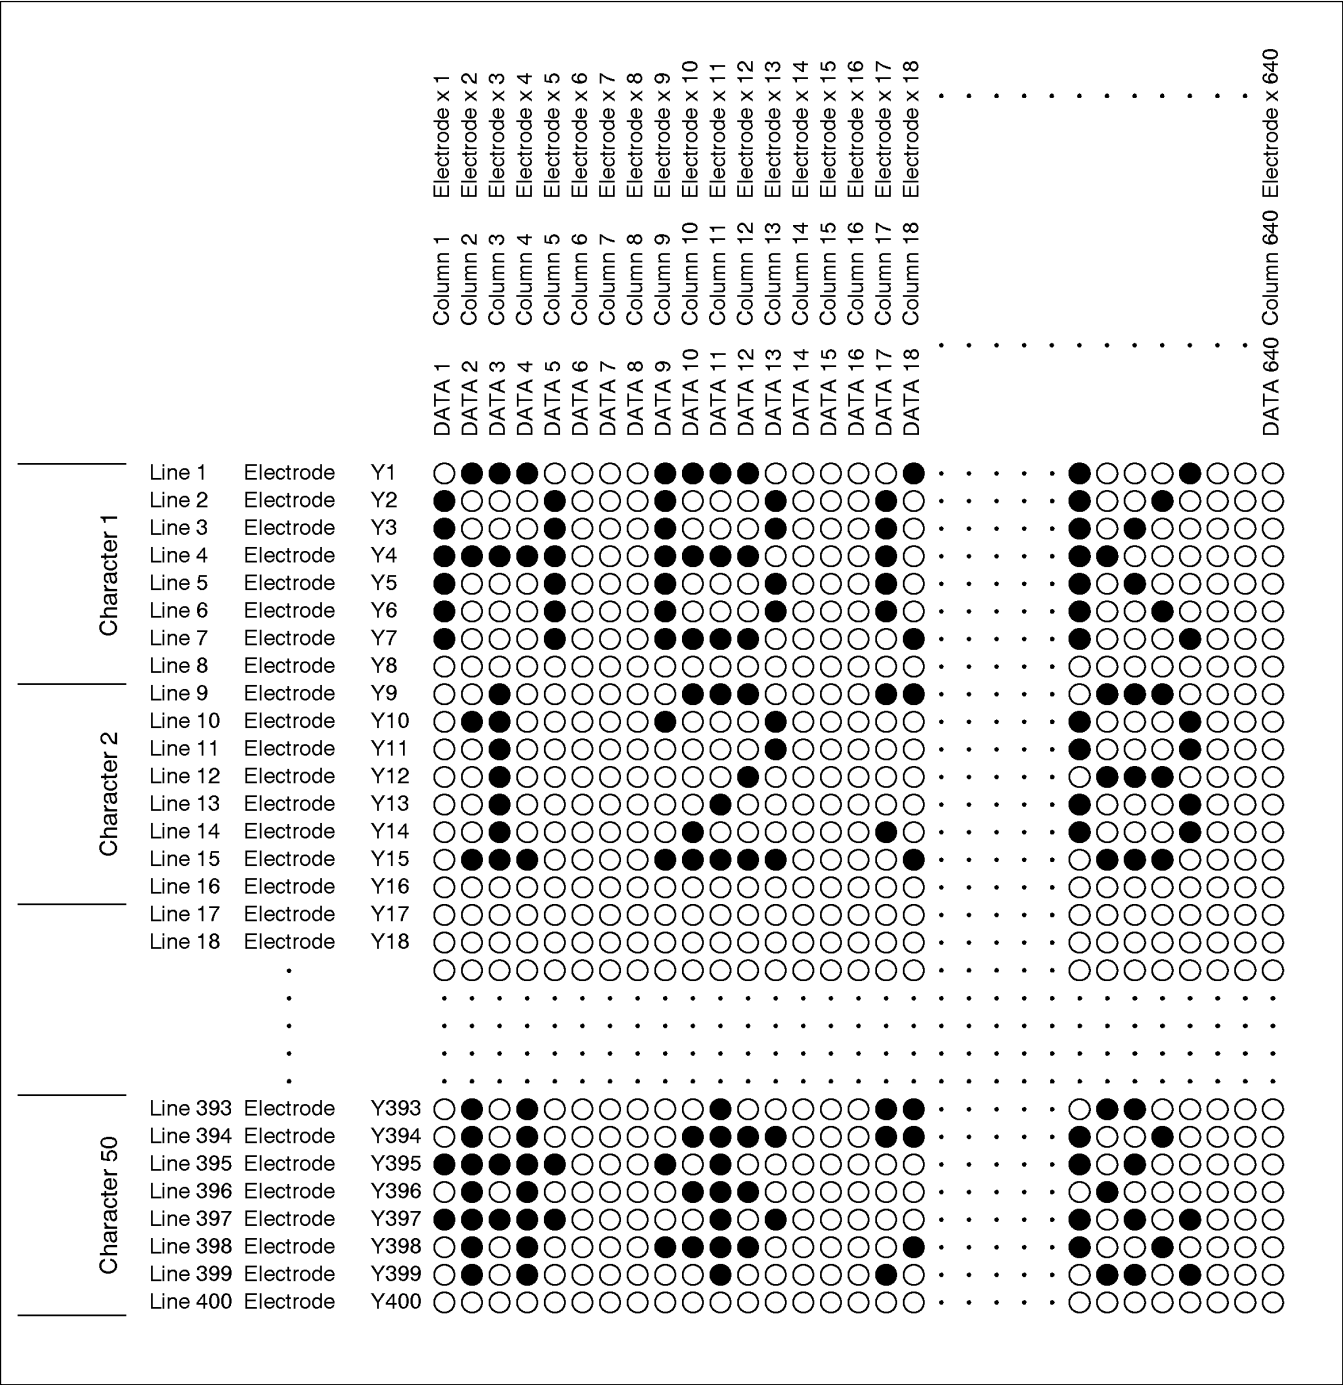


Interface Signal Timing Table

Symbol	Description	Min.	Typ.	Max.	Unit
T_{VSYNC}	A Cycle of Frame Synchronous Signal	16.8	25	—	ms
t_{WV}	Pulse Width of Frame Synchronous Signal	2	—	—	μ s
t_{VH}	Delay Time $\overline{V_{SYNC}} - \overline{H_{SYNC}}$	1	—	—	μ s
t_{HV}	Delay Time $\overline{H_{SYNC}} - \overline{V_{SYNC}}$	2	—	—	μ s
T_{Hsync}	A Cycle of Line Synchronous Signal	40	60	80	μ s
t_{WH}	Pulse Width of Line Synchronous Signal	2	—	—	μ s
t_{HC}	Delay Time $\overline{H_{sync}} - CLK$	1	—	—	μ s
t_{CH}	Delay Time $CLK - \overline{H_{sync}}$	0.5	—	—	μ s
T_{CLK}	A Cycle of Clock Signal	45	80	110	ns
$t_{WCLK1,2}$	Pulse Width of Clock Signal*	22	40	—	ns
t_{SUD}	Set Up Time for Data	20	40	—	ns
t_{HD}	Hold Time for Data	22	40	—	ns

Notes: *Recommended ratio between t_{WCLK1} and T_{WCLK2} is 1:1

Interface Signal Timing Chart (400-line display mode)

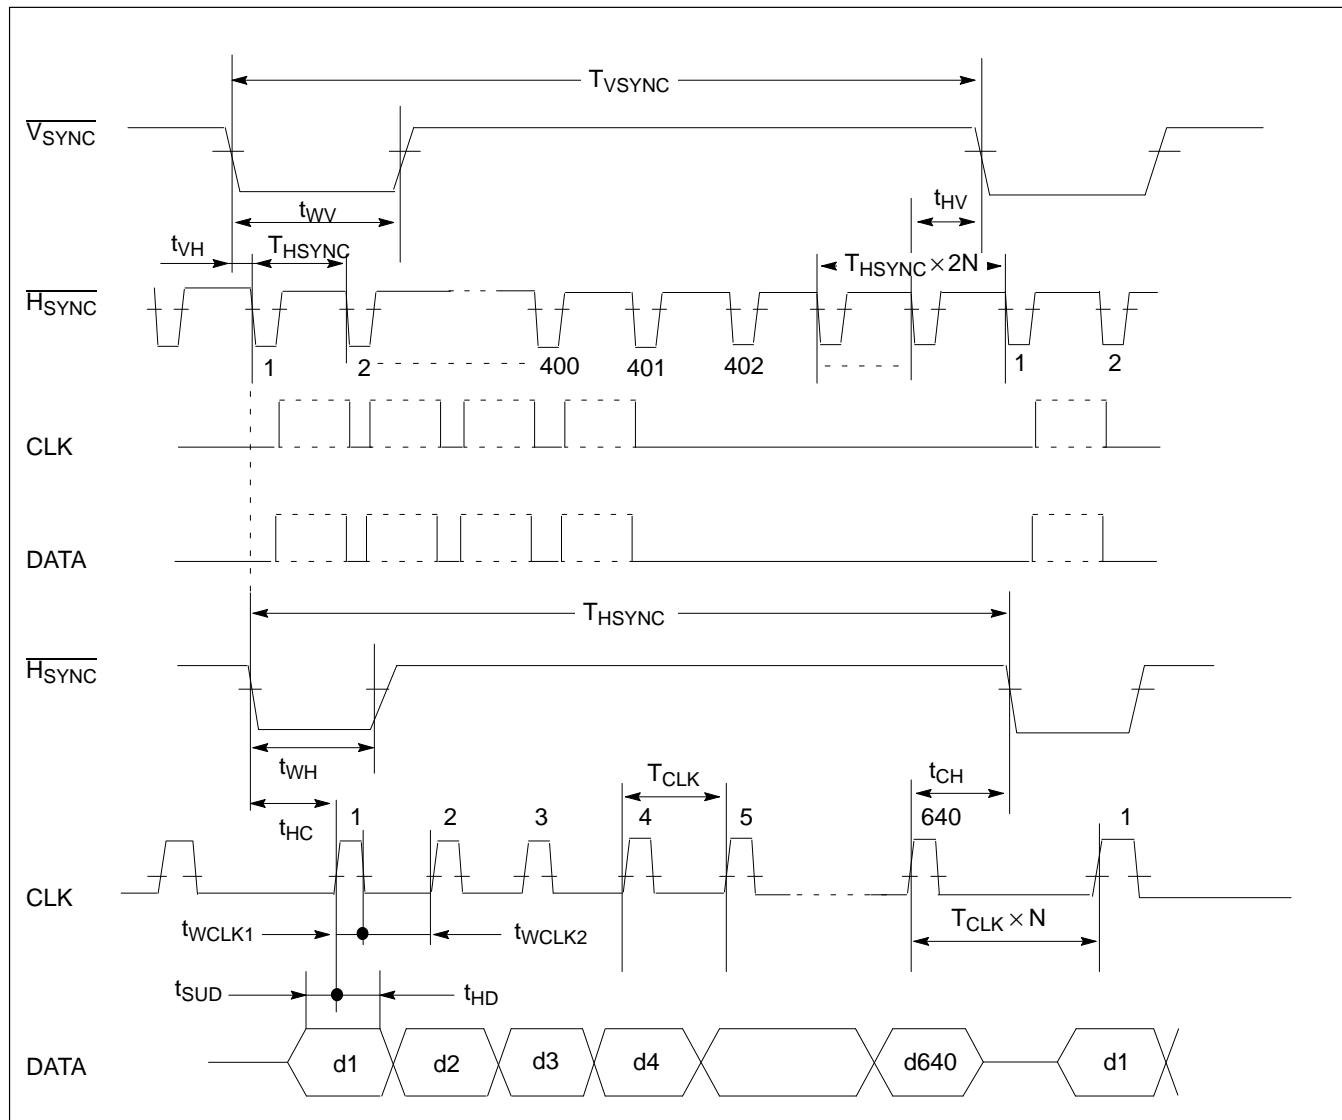

Note: 200-line display mode with double scanning function is available by setting short socket on the back of unit.

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q016-G/S

Pin No.	Symbol	Pin No.	Symbol
1	N.C.	2	N.C.
3	N.C.	4	S. GND
5	DATA	6	S. GND
7	N.C.	8	S. GND
9	$\overline{F_{\text{SYNC}}}$	10	S. GND
11	$\overline{V_{\text{SYNC}}}$	12	S. GND
13	B.C.	14	S. GND
15	CLK	16	S. GND

Notes: Applicable Connector:
FCN-607B016-G/D without strain relief (attached)

N.C. means "No Connection."

Power Supply Connector

FCN-815P-009TA

Pin No.	Symbol
1	V_{CC}
2	GND (L)
3	$-V_{\text{S}}$
4	GND (H)
5	$+V_{\text{S}}$
6	V_{W}
7	N.C.
8	V_{E}
9	N.C.

Notes: Applicable Connectors:
FCN-813J009-A, Housing
FCN-813J-T/Q, Contact for Manual Use
FCN-813J-T/R, Contact for Automatic Use

FPF8050HRUC-001

640 x 400 Dots, High Brightness, Plasma Display Unit

9.8-IN DIAGONAL SCREEN GRAPHIC UNIT WITH HIGH BRIGHTNESS, FLICKER-FREE DISPLAY


DESCRIPTION

Fujitsu plasma display unit consists of an AC-type gas discharge plasma panel with memory function based on Fujitsu's unique panel technologies and its driving circuit.


The black-faced panel provides a clear display even in bright conditions, and memory function provides easy-to-view flicker-free display; the newly developed panel gives high brightness display.

FEATURES

- High brightness of 150 cd/m²
- High contrast: 20 :1
- Easy-to-view flicker-free display
- 50,000 hours of panel life without brightness reduction
- Easy-to-use interface conforming to CRT interface



BLOCK DIAGRAM

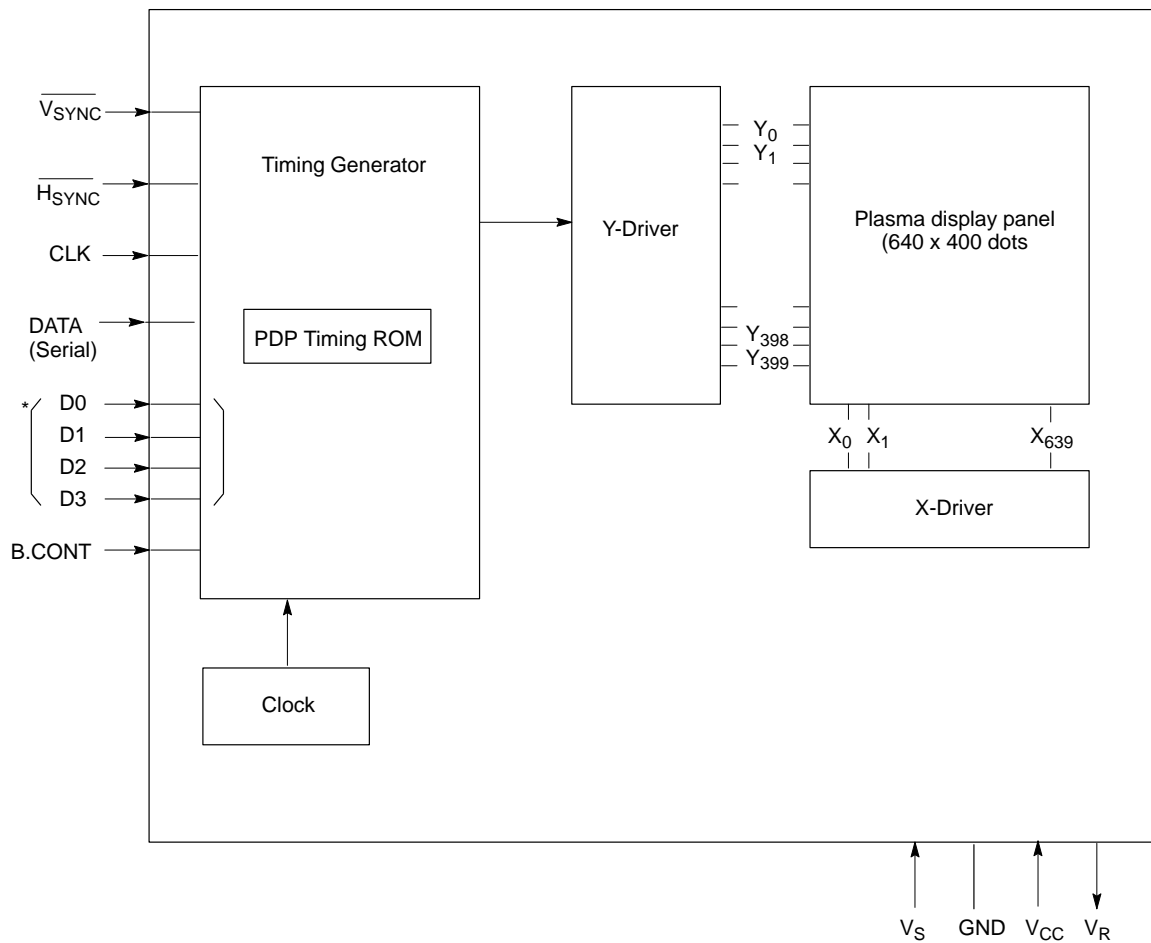

*Use DATA signal line for serial data; use D0 to D3 signal lines for 4-bit parallel data
Refer to the signal pin arrangement for the signal line connections.

SPECIFICATIONS

Item	Specifications
Number of display dots	640(H) x 400(V) (256,000)
Dot pitch	0.33 mm (H) x 0.33 mm (V) (0.013 in x 0.013 in)
Dot size	Approximately 0.2 mm (0.008 in x 5.184 in)
Display resolution	77 dots per linear inch
Effective display screen area	210.87 mm (H) x 131.67 mm (V) 8.302 in x 5.184 in)
Display color	Neon orange
Brightness	Dot: 150 cd/m ² typical at 90 μ s of $\overline{H_{SYNC}}$ signal Plane avg: 25 cd/m ² typical at 90 μ s of $\overline{H_{SYNC}}$ signal
Contrast ratio	20 : 1 minimum
Viewing angle	160 degrees
Weight	Approximately 1 kg
Dimensions	See DIMENSIONS, page 11

ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Sustain voltage	V_S	120	V
Logic voltage	V_{CC}	7	V

OPERATING RATINGS

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95V$)	I_S	50	200	340	mA
Supply voltage for logic	V_{CC}	4.75	5.0	5.25	V
Supply voltage for logic ($V_{CC} = 5V$)	I_{CC}	60	120	450	mA
Signal input voltage for logic 1 (H-level)	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75V$)	I_{IH}			20	μA
Signal input voltage for logic 2 (L-level)	V_{IL}	-0.5		0.8	V
Signal input current for logic 1 ($V_{IL} = 0.4V$)	I_{IL}			-16	mA

ENVIRONMENTAL CONDITIONS

Rating	Symbol	Value	Unit
Operating temperature	T_{OP}	0 to 50	°C
Storage temperature	T_{STG}	−20 to 70	°C
Humidity	RH_{STG}	20 to 85 (no condensation)	%RH
Vibration	V	2	G
Shock	S	40	G
Pressure (non-operating)		340 to 1114	mb

TYPE OF SIGNALS

Signal Name		Symbol	Signal Lines	Function
Data	Serial input	D	1	Display data signals. Dots are lit at logical high and are not lit at logical low. Relation between display data and display dots in parallel input is shown in Figure 3.
	Parallel input	D0 ~ D3	4	
Clock		CLK	1	This input signal controls the input timing of the display data. Dot data is read into the shift register at the rising edge of each signal. The number of clock signals in one cycle of H_{SYNC} is 640 in serial input, 160 in parallel input.
Line synchronous		$\overline{H_{SYNC}}$	1	The input signal that controls the scanning timing of the line electrode. Y address increment to select the next line electrode is done at the falling edge of each signal. The number of $\overline{H_{SYNC}}$ signals during the period $\overline{V_{SYNC}}$ must be $402 + 2N$.
Frame synchronous		$\overline{V_{SYNC}}$	1	This input signal controls the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the $\overline{V_{SYNC}}$ signal
Brightness control		B.CONT	1	The input signal that controls the screen brightness. Brightness is at its maximum at logical high, and 33% of the maximum at logical low. Brightness varies from 33 to 100%.

Note: This plasma display has a function to detect and set the serial/parallel data input signal by counting the number of clock signal inputs during the first and second $\overline{H_{SYNC}}$ signal periods.

No. of Clock Signals	Serial/Parallel
640 clocks	Serial
160 clocks	Parallel

TIMING OF INTERFACE SIGNALS

	Symbol	Min	Typ	Max	Unit	Remarks
1	T_{VSYNC}		39.6		ms	Frame frequency: 22 Hz, typical
2	t_{WV}	1			H	H: Horizontal sync period
3	t_{VH}	1		Remark	μs	$t_{VH} < T_{HSYNC}$
4	t_{HV}	2		Remark	μs	$t_{HV} < T_{HSYNC}$
5	T_{HSYNC}	88	90	92	μs	See Note 1
6	t_{WH}	2	6		μs	
7	t_{HC}	2			μs	
8	t_{CH}	2	3		μs	
9	T_{CLK}	44			ns	
10	t_{WCLK1}	$\frac{0.9}{2} T_{CLK}$	$\frac{1}{2} T_{CLK}$	$\frac{1.1}{2} T_{CLK}$	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ See Note 2
11	t_{WCLK2}					
12	t_{SUD}	22			ns	
13	t_{HD}	22			ns	

Note 1: T_{HSYNC} ranges from 40 to 45 μs and from 60 to 65 μs are also available. In these cases, brightness control range changes.
Refer to the Horizontal Synchronous Signal

Note 2: Recommended t_{WCLK1}/t_{WCLK2} ratio is 1 : 1.


HORIZONTAL SYNCHRONOUS SIGNAL

Recommended T_{Hsync} condition is from 88 to 92 μs . In addition to this condition, T_{Hsync} conditions shown in table below are also available. In some cases, note that the brightness, brightness control range, and input current also varies.


Typical T_{Hsync} value		42 μs	62 μs	90 μs
T_{Hsync} range		40 ~ 45 μs	60 ~ 65 μs	88 ~ 92 μs
Brightness	Minimum	14 cd/m^2	19 cd/m^2	20 cd/m^2
	Typical	17 cd/m^2	23 cd/m^2	25 cd/m^2
Brightness control range		0 ~ 100%	50 ~ 100%	33 ~ 100%
Input current I_{S}		280 mA	330 mA	340 mA

TYPE OF SIGNALS

Symbol	Min	Typ	Max	Unit
Tbc	—	14.0	16.6	ms

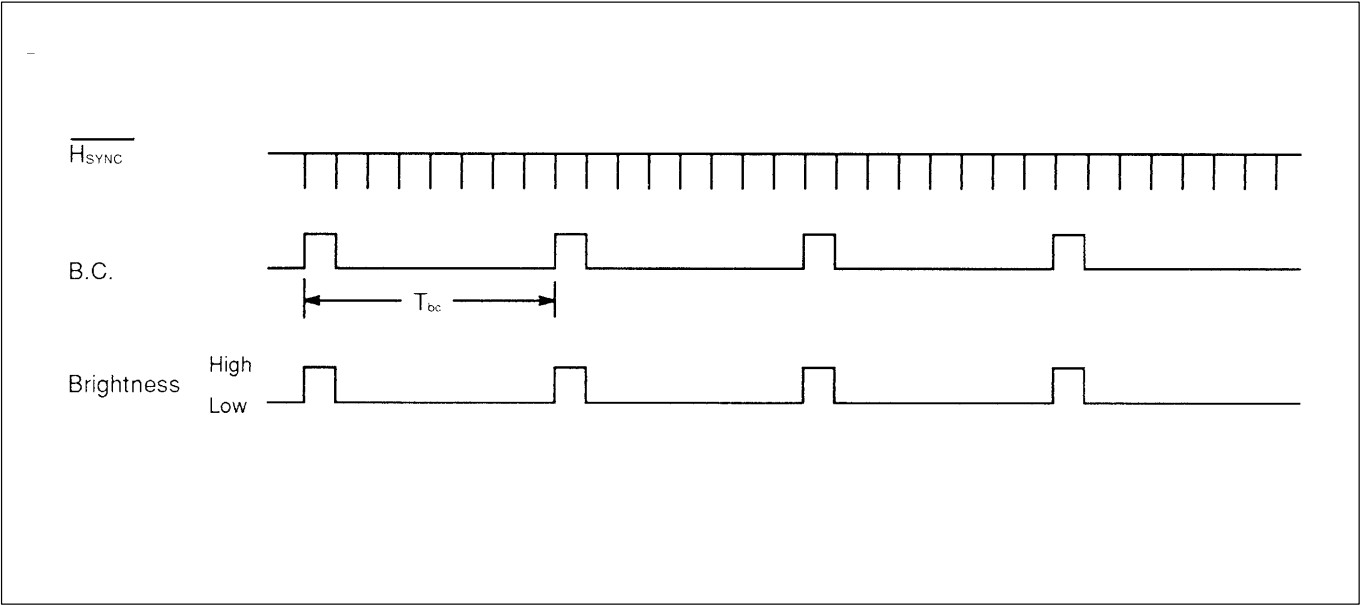

INTERFACE SIGNAL TIMING CHART OF SERIAL DATA INPUT

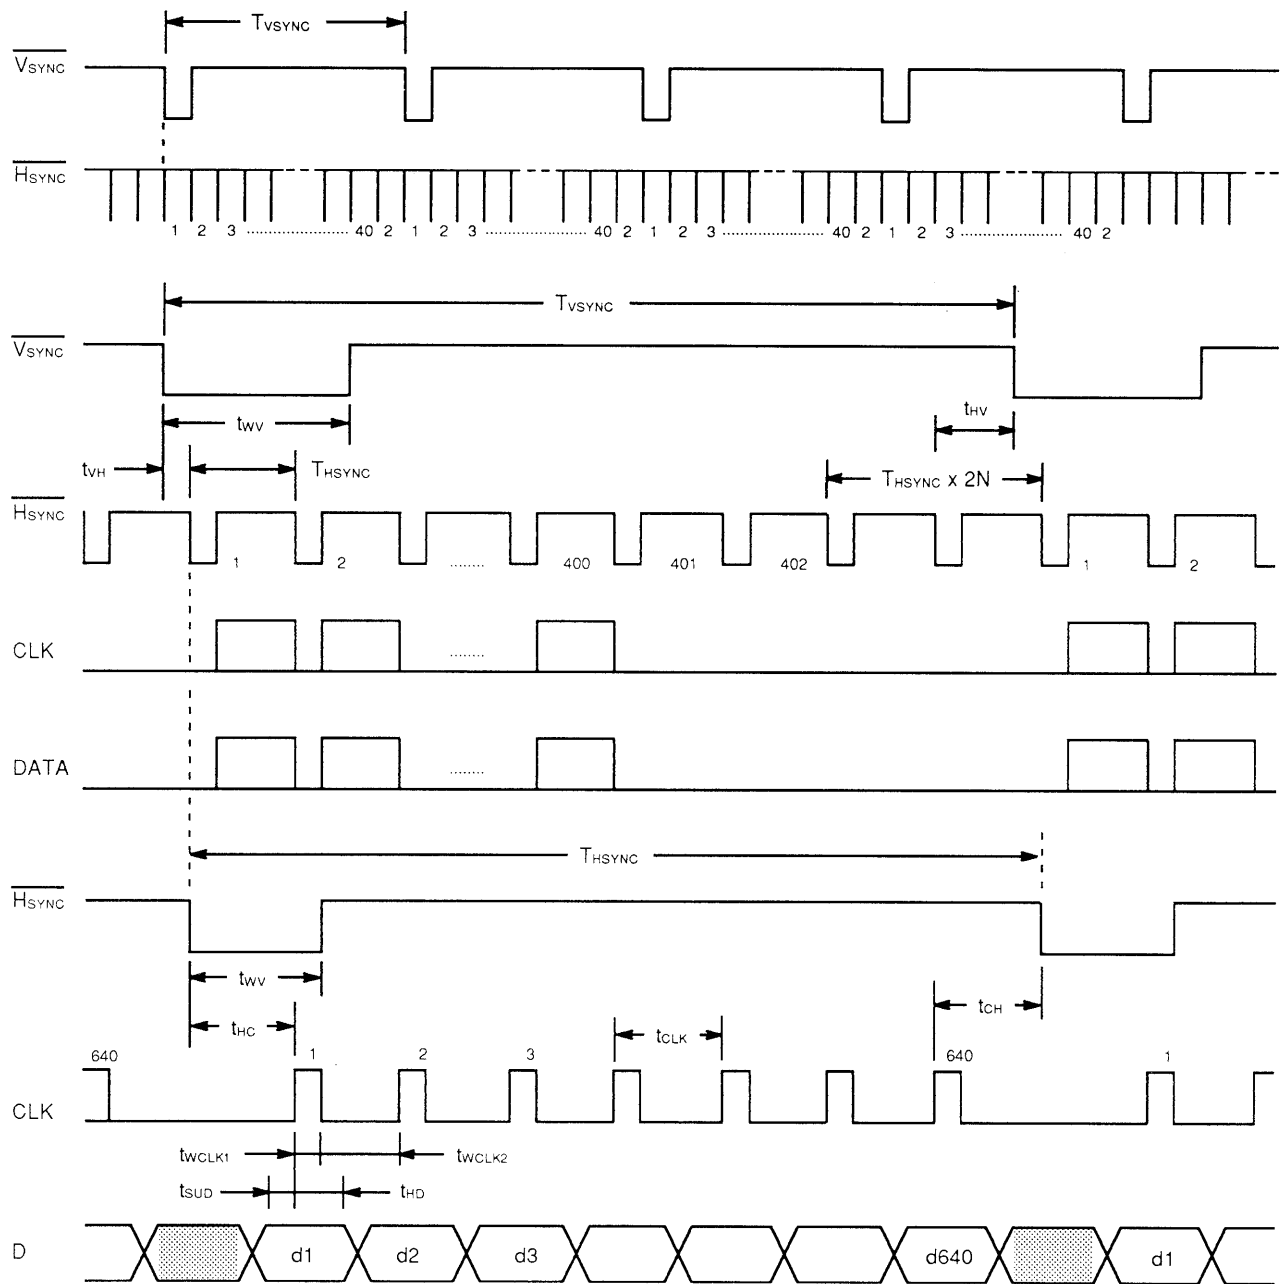

Hatched area () : invalid



CONNECTORS

Connector for signals: FCN-605Q026-G/S

Mating connector: FCN-607B026-G/D

Pin No.	Symbol	Pin No.	Symbol
1	$\overline{\text{VSYNC}}$	2	S. GND
3	$\overline{\text{HSYNC}}$	4	S. GND
5	N.C. (D0)	6	N.C.
7	N.C. (D1)	8	N.C.
9	N.C. (D2)	10	N.C.
11	N.C. (D3)	12	N.C.
13	N.C.	14	S. GND
15	DATA	16	S. GND
17	N.C.	18	S. GND
19	CLK	20	S. GND
21	B.C.	22	N.C.
23	N.C.	24	N.C.
25	N.C. (V_{CC})	26	N.C. (V_{CC})

Notes: N.C. = No connection
 Terminals 25 and 26 output V_{CC} for optionals. No connection with these terminals
 Use terminal 15 (DATA) for serial data input
 Use terminals 5 (D0), 7 (D1), 9 (D2), and 11 (D3) for parallel data input.

CONNECTORS, continued**Connector for power supply: FCN-8150009-TA**

Mating connectors: FCN-813J009-A, Housing;
FCN-813J-T/Q, contact for manual use
FCN-813J-T/R, contact for automatic use

Pin No.	Symbol
1	V_{CC}
2	GND
3	N.C.
4	GND
5	V_S
6	N.C.
7	N.C.
8	GND
9	V_R^*

* This PDP unit outputs the voltage V_R from 0 to 2.5 VDC through the ninth terminal of power supply connector. This voltage is used for the supply voltage adjustment of FPF07P series power supply unit.




FPF8050HRUD-001


Plasma Display Graphics Unit

The FPF8050HRUD-001 plasma display unit consists of an AC gas discharge plasma display unit with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HRUD-001 a highly reliable display device.

- High resolution
- Bright, even, orange-on-black display
- No flicker or warp
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

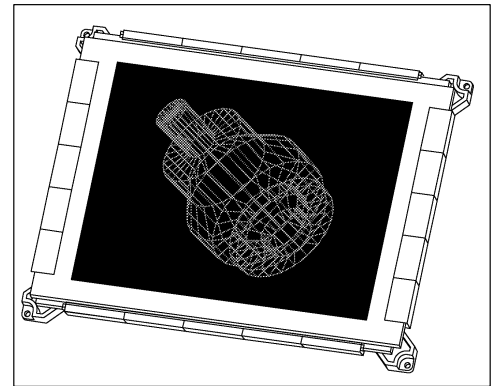

BLOCK DIAGRAM

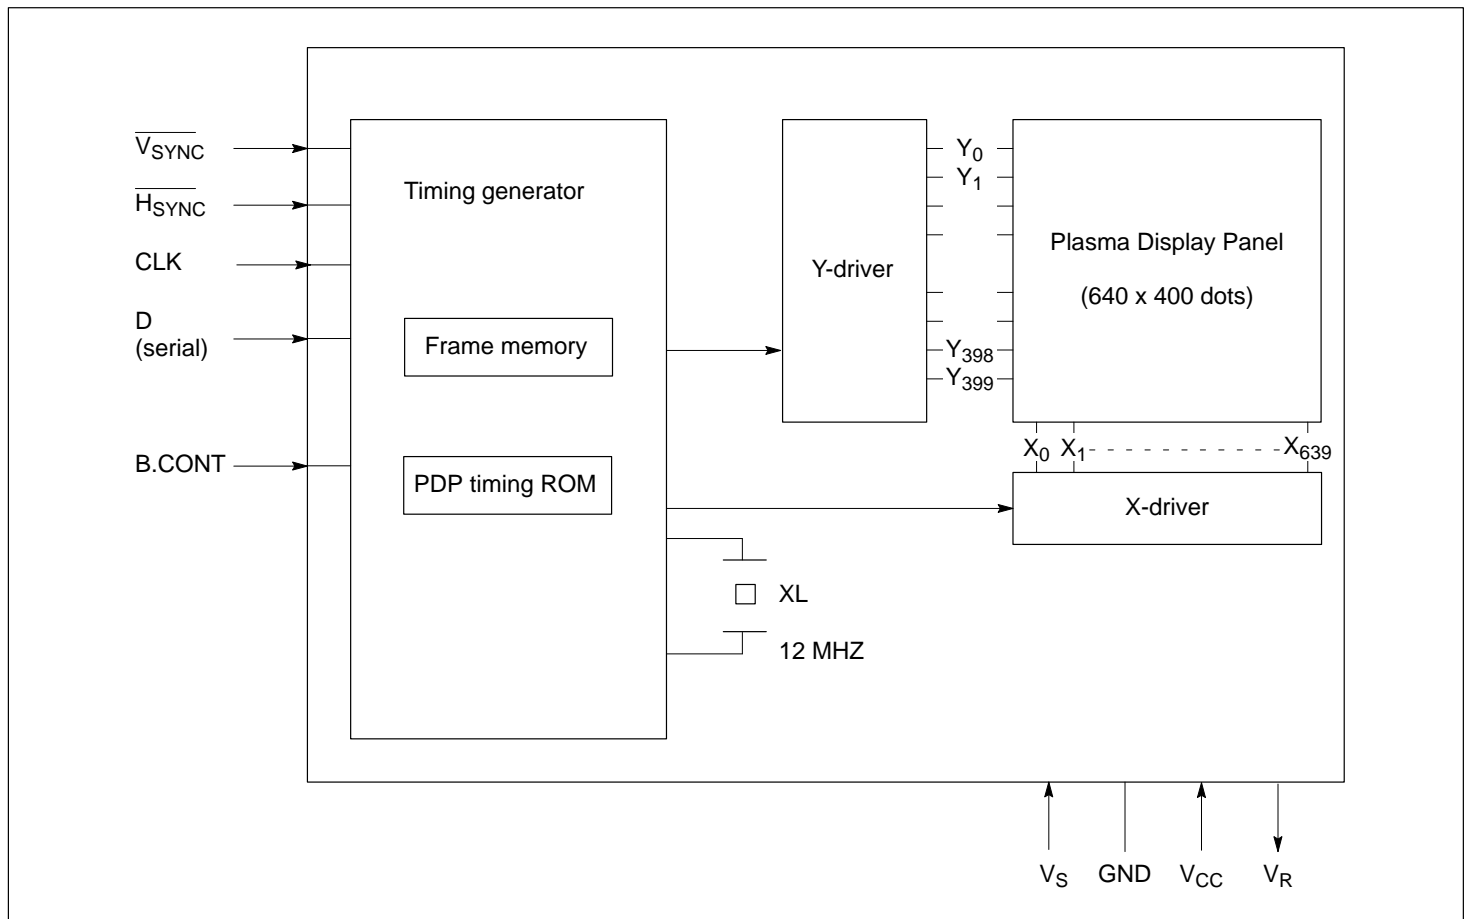

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			310	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.45	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.8	V
Signal input current for logic 0 ($V_{IL} = 2.75$ V)	I_{IL}			-16	mA

Note: * The power source is required to be variable from 88 to 100.5V DC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of display dots	640 × 400 dots (256,000 dots)
Dot pitch	0.3 (H) × 0.3 (V) mm (0.012 × 0.012 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	191.7 (H) × 119.7 (V) mm (7.547 × 4.713 in.)
Display color	Neon orange
Brightness	110 cd/m ² (Peak) 15 cd/m ² (Average)
Contrast ratio	20 : 1 min
Viewing angle	160° min
Weight	Approx. 1 kg
External dimensions	See External Dimensions

Performance Specifications


Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50°C
Operation humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70°C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

Physical Construction and Operation

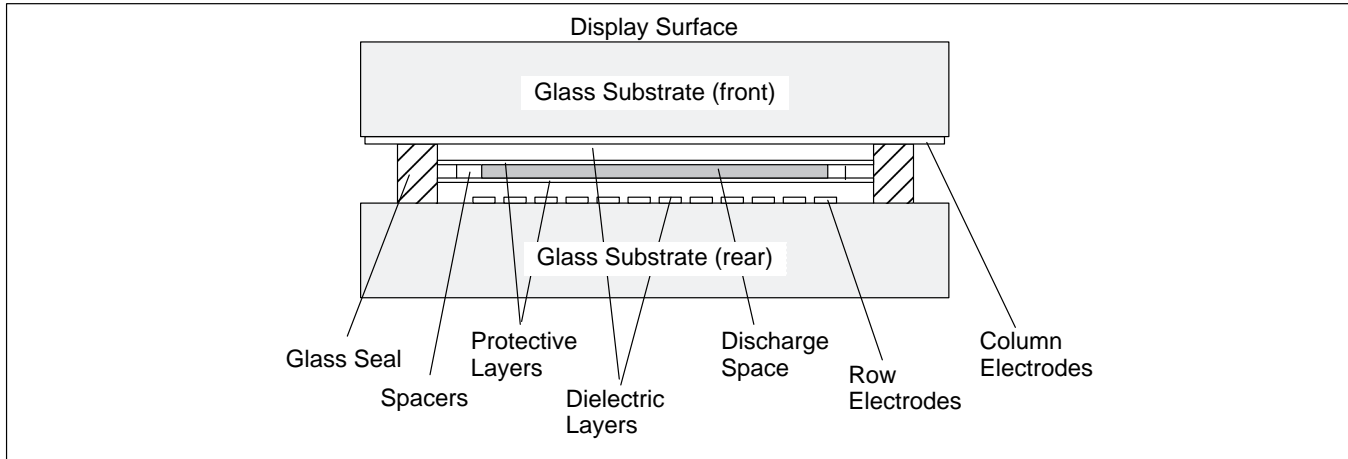

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

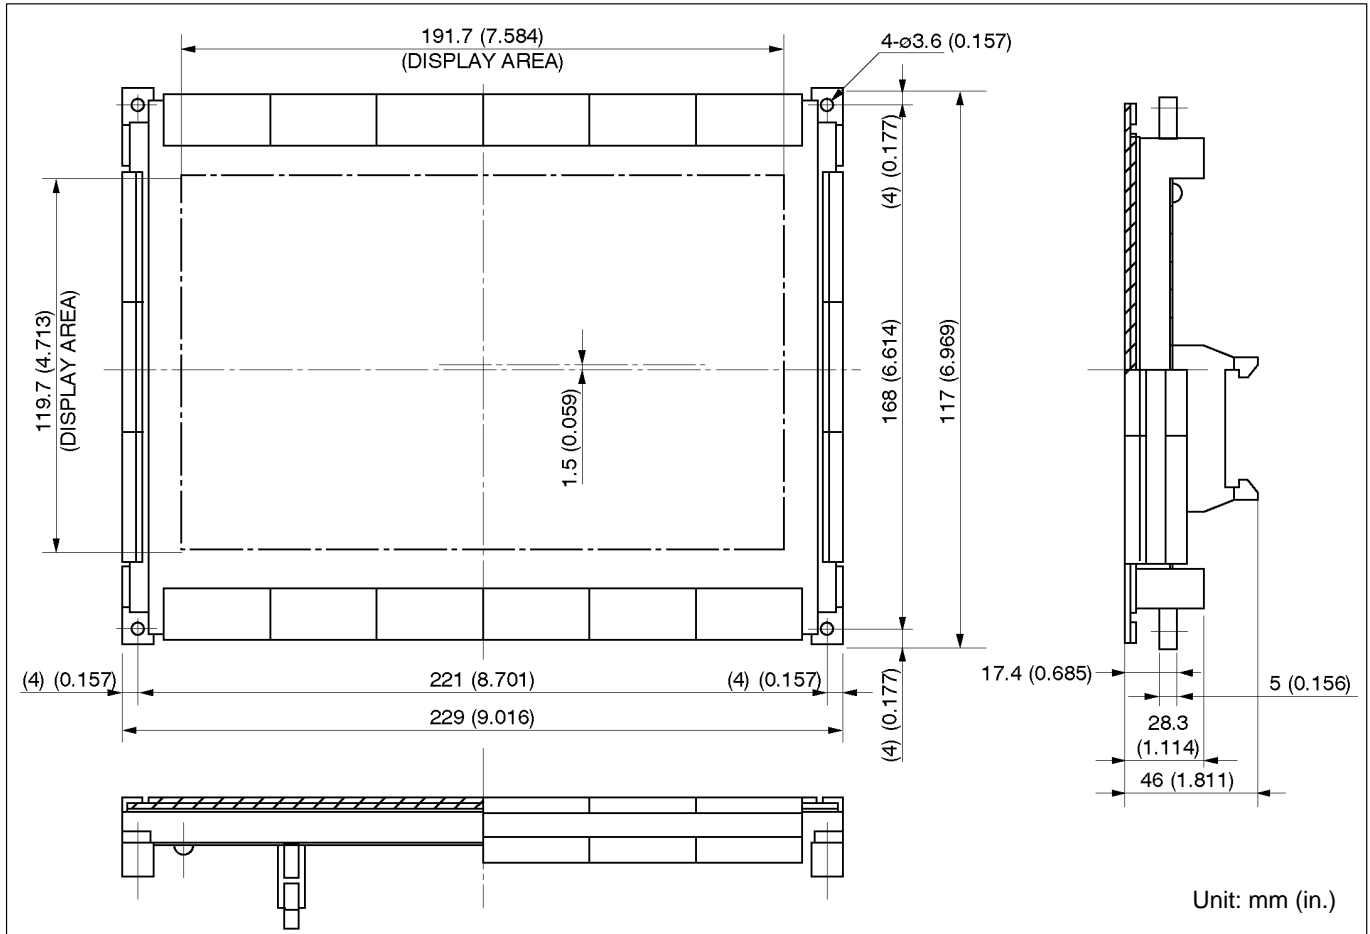


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Logic	Definition and Function
Display data	D	Posi	Serial display data. Relation between display data and display dots is shown below.
Clock signal	CLK	Posi	The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.
Line synchronous	$\overline{H_{SYNC}}$	Nega	The number of $\overline{H_{SYNC}}$ signals in one cycle of $\overline{V_{SYNC}}$ must be 400 or more even numbers.
Frame synchronous	$\overline{V_{SYNC}}$	Nega	The input signal which controls the refresh speed of the screen.
Brightness control	B.CONT		The input signal which controls the screen brightness. Brightness is its maximum at logical "High" and 33% of maximum at logical "Low."

Relationship Between Display Data and Display Dots

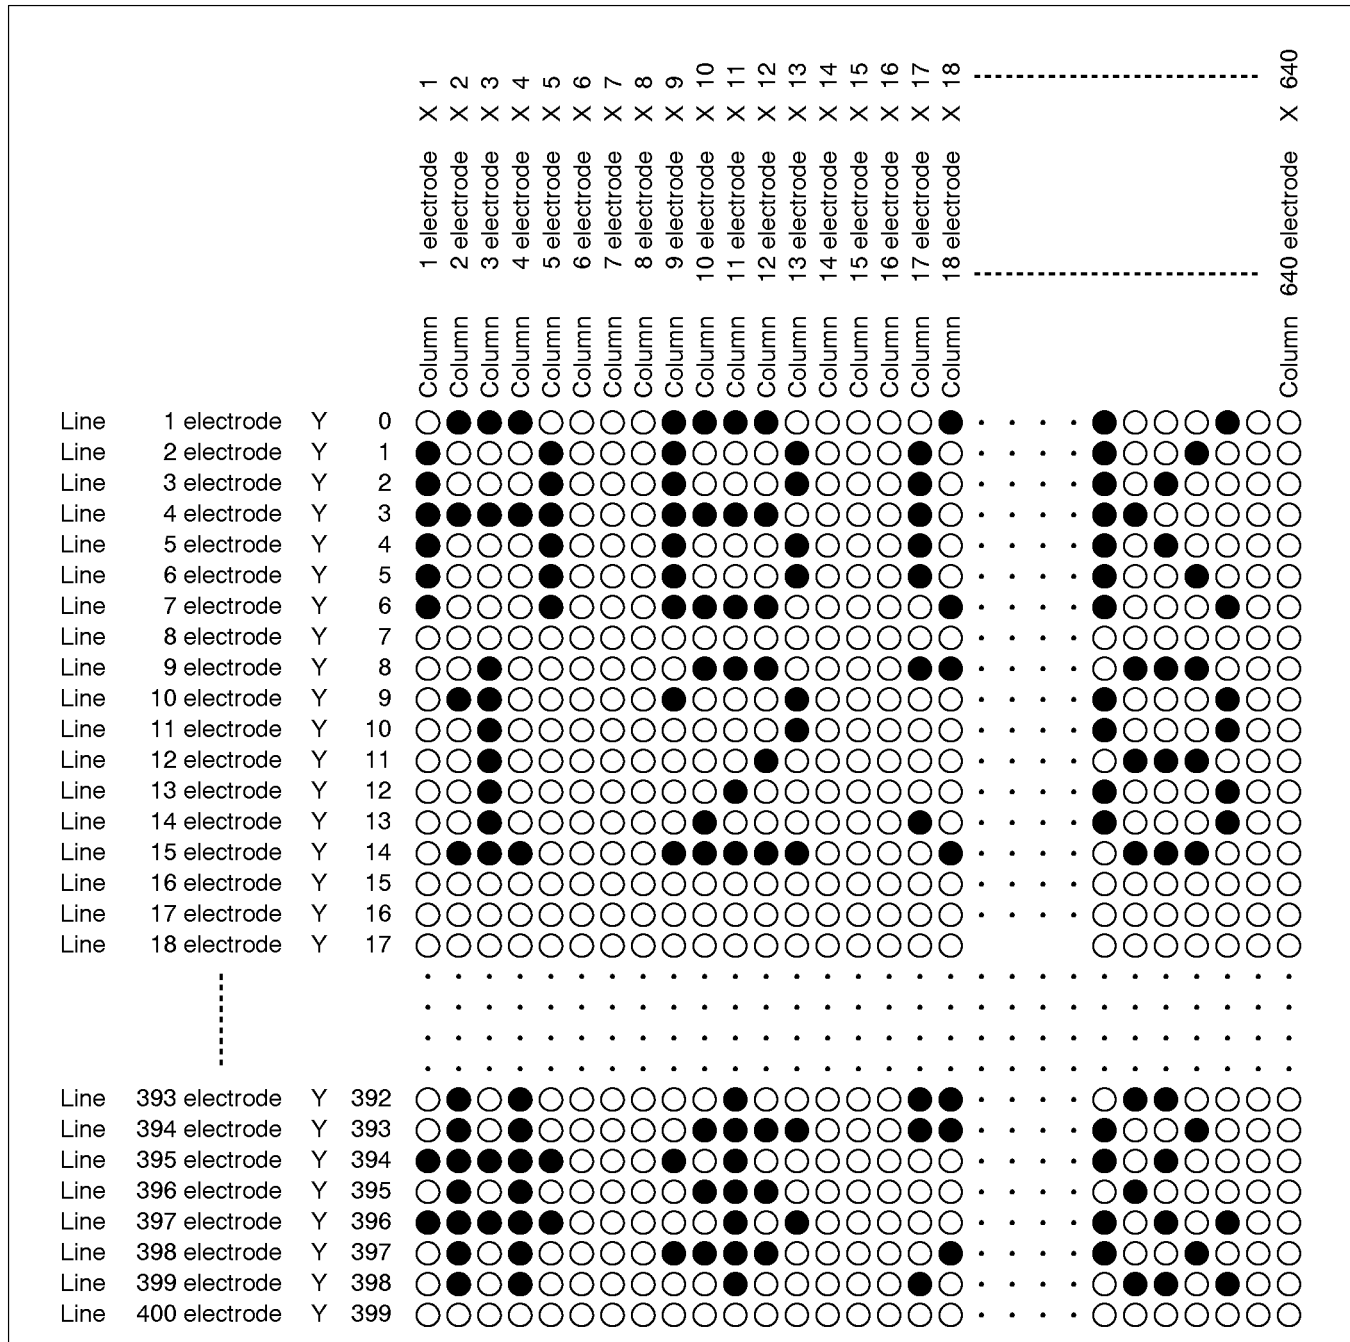


Interface Signal Timing Table

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	39.6	—	ms
t_{WV}	T_{HSYNC}	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}^1	88	90	92	μs
t_{WH}	2	6	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ T_{HSYNC} ranges from 40 to 45 μs and from 60 to 65 μs are also available.
In these cases, brightness control range changes.

² Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

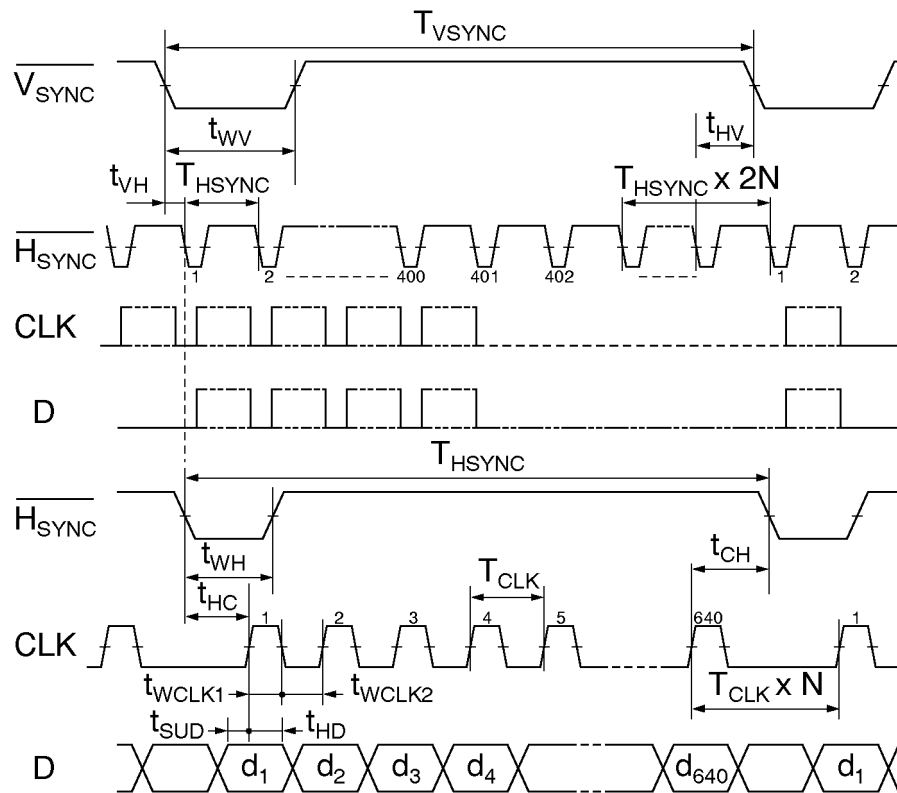

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-604Q26-G/S (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{F_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D	16	S.GND
17	N.C.	18	S.GND
19	CLK	20	S.GND
21	B.CONT	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Applicable connector:
FCN-607B026-G/D

Power Supply Connector

FCN-814P009-TA (Fujitsu)

Pin No.	Signal
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *

Applicable connectors:
FCN-813J009-A housing (Fujitsu)
FCN-813J-T/A contact (Fujitsu)


* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

FPF8050HRUD-101


Plasma Display Graphics Unit

The FPF8050HRUD-101 plasma display graphics unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. Fujitsu's proprietary control method provides a clear display with a four-level gray scale. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HRUD-101 a highly reliable display device.

- Bright, even, orange-on-black display
- Four-level gray scale
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

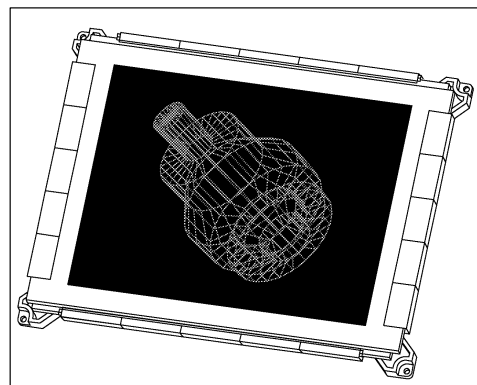

BLOCK DIAGRAM

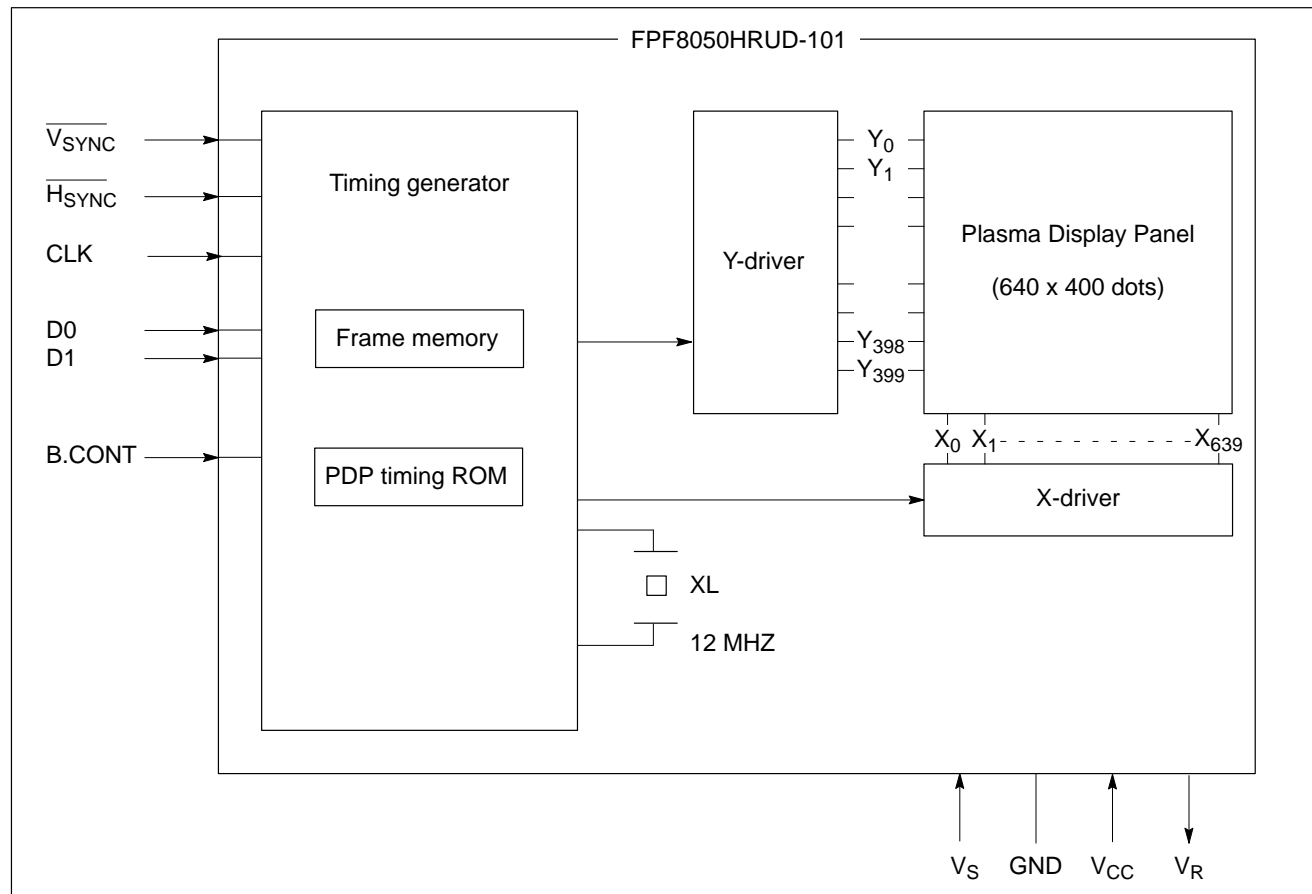

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			310	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.50	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.8	V
Signal input current for logic 0 ($V_{IL} = 2.75$)	I_{IL}			-16	mA

Note: *The power source is required to be variable from 88 to 100.5V DC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of display dots	640 × 400 dots (256,000 dots)
Dot pitch	0.3 (H) × 0.3 (V) mm (0.012 × 0.012 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	191.7 (H) × 119.7 (V) mm (7.547 × 4.713 in.)
Display color	Neon orange
Gray scale	4-level (Approx. 100%, 67%, 33%, 0%)
Brightness	110 cd/m ² (Peak)
Contrast ratio	20 :1 min
Viewing angle	160° min
Weight	Approx. 1 kg
External dimensions	See External Dimensions

Performance Specifications


Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50°C
Operation humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70°C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

Physical Construction and Operation

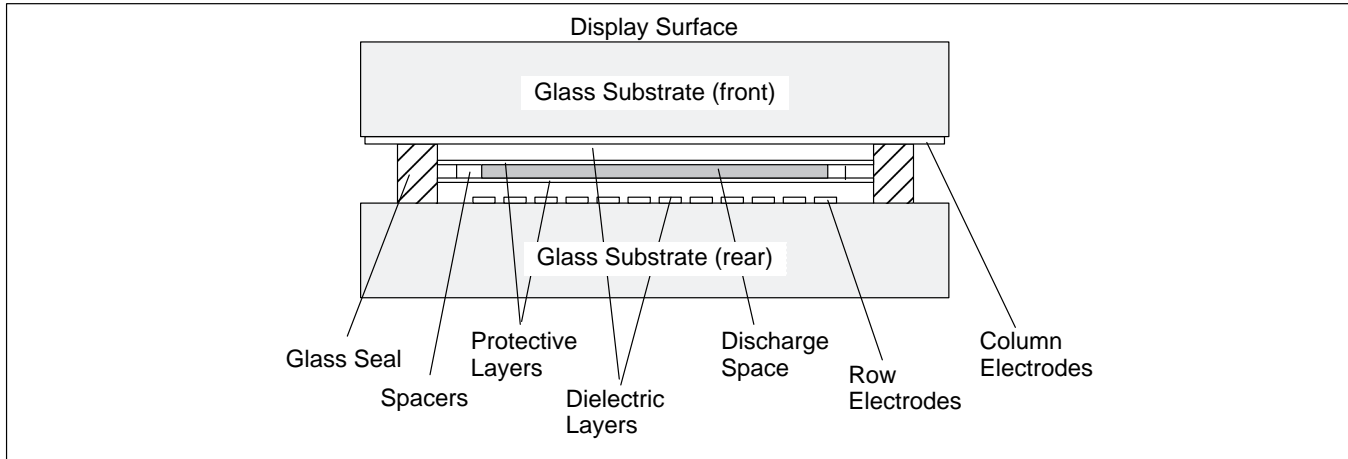

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

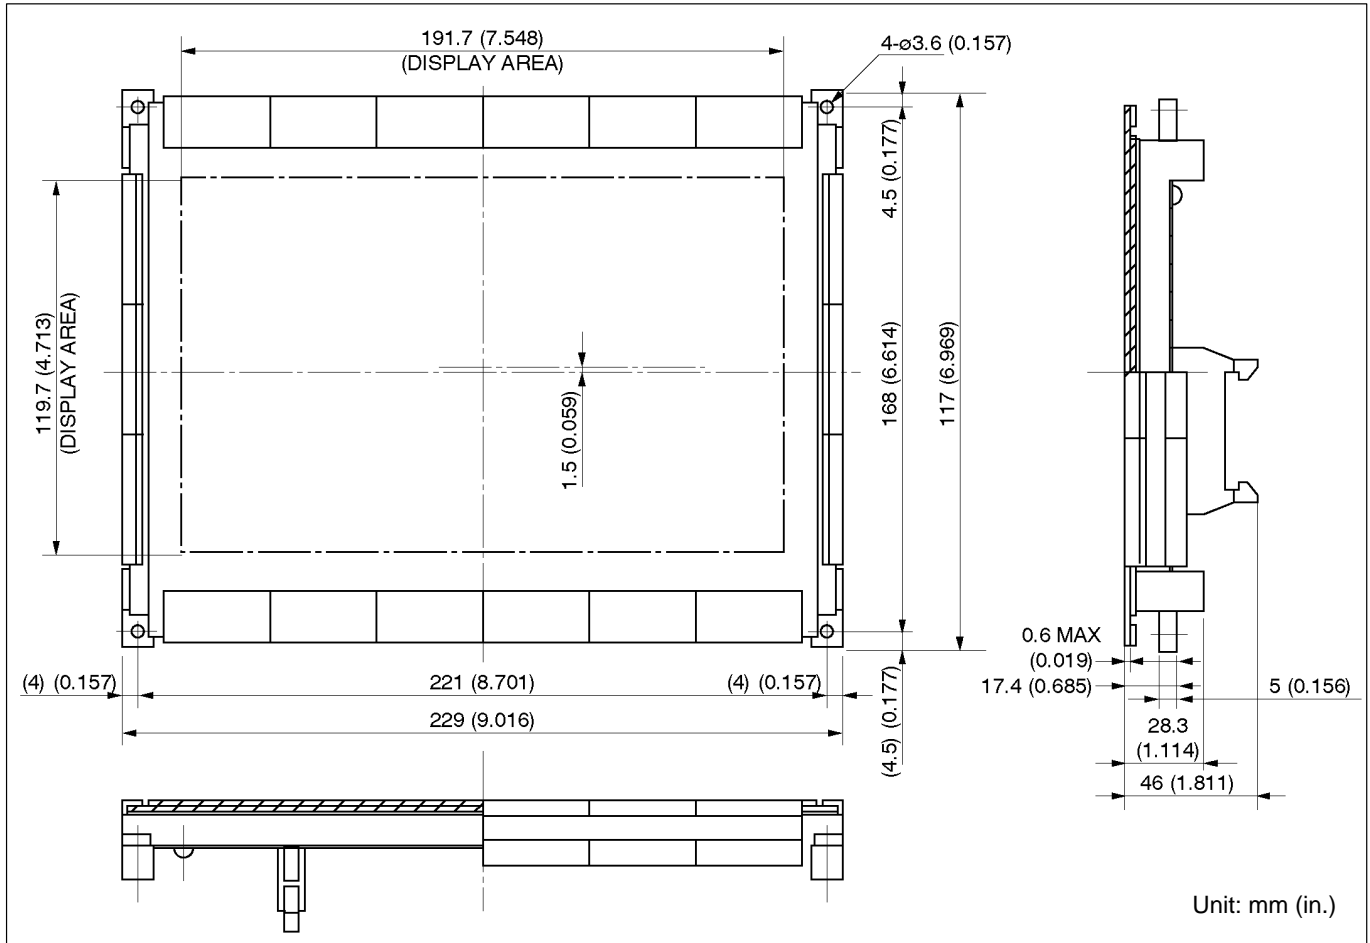


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Logic	Definition and Function			
Display data	D0 D1	Posi	2-bit display data. Relationship between data and gray scale level is shown below.			
			D1	D0	Gray scale level	(Relative brightness)
			0	0	(0)	
			0	1	Low	(33%)
			1	0	Medium	(67%)
			1	1	High	(100%)
Clock signal	CLK	Posi	The number of clock signals in one cycle of $\overline{H_{\text{SYNC}}}$ must be 640.			
Line synchronous	$\overline{H_{\text{SYNC}}}$	Nega	The number of $\overline{H_{\text{SYNC}}}$ signals in one cycle of $\overline{V_{\text{SYNC}}}$ must be 402 or more even numbers.			
Frame synchronous	$\overline{V_{\text{SYNC}}}$	Nega	The input signal which controls the refresh speed of the screen.			
Brightness control	B.CONT	The input signal which controls the screen brightness. Brightness is its maximum at logical “High” and 33% of maximum at logical “Low.”				

Relationship Between Display Data and Display Dots

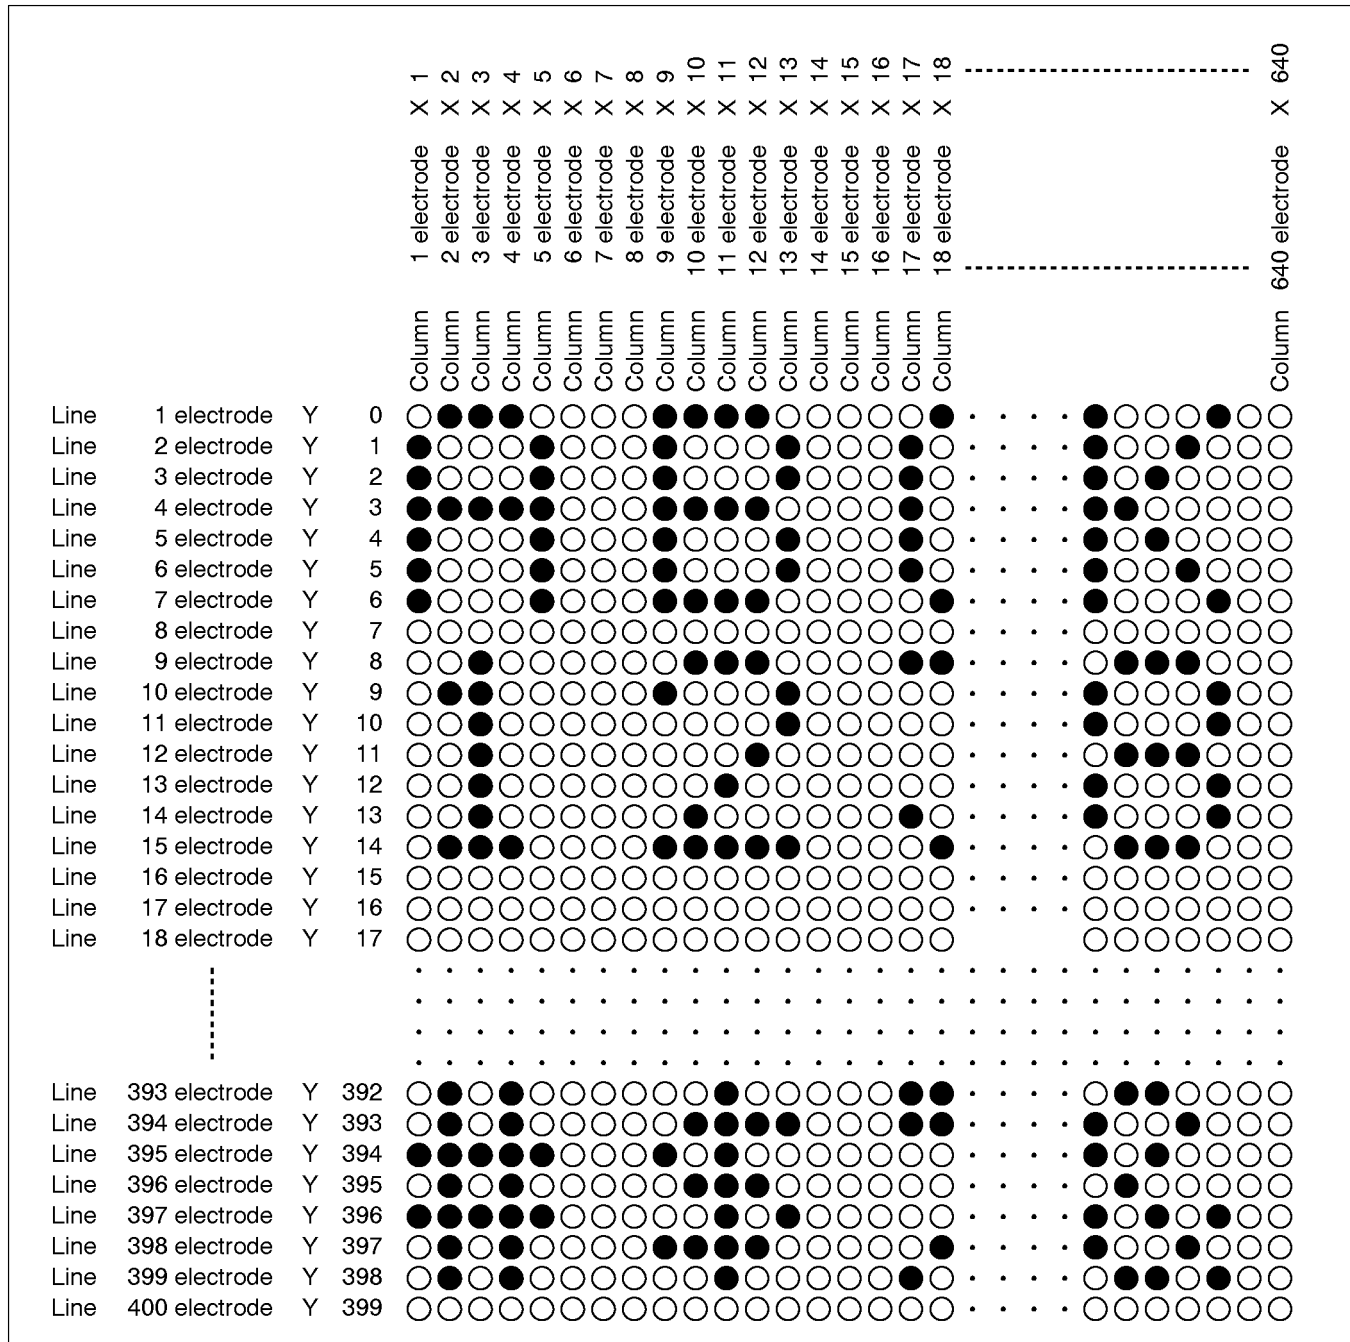


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	16.7	20	ms
t_{WV}^1	—	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}	40	42	45	μs
t_{WH}	2	5	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ $T_{WV} > T_{HSYNC}$

² Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

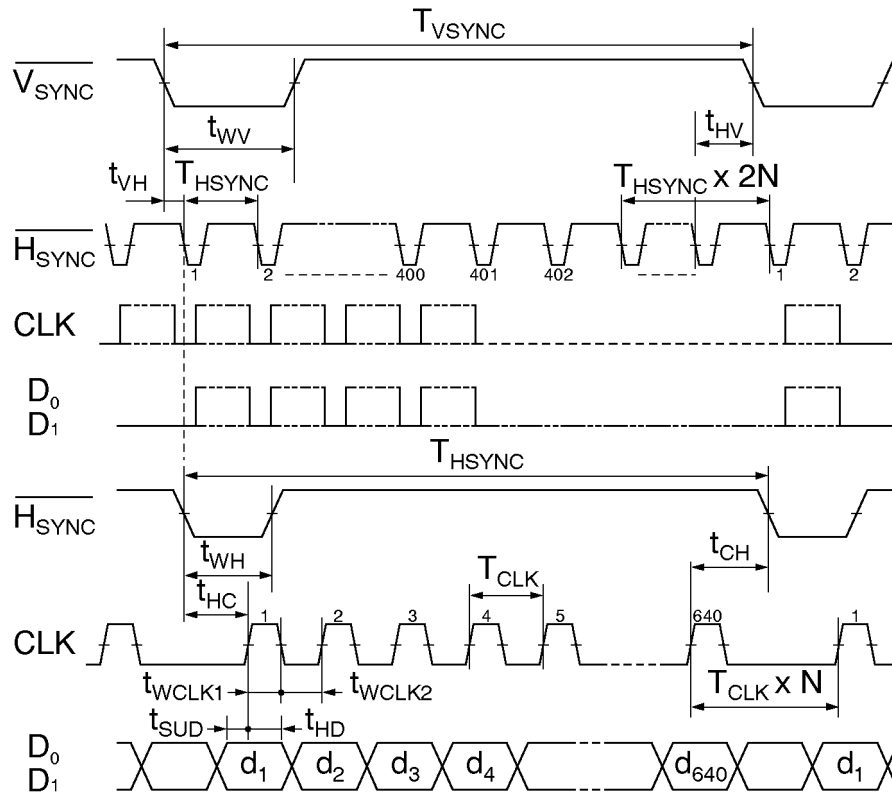

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-604Q26-G/S (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{F_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D0	16	S.GND
17	D1	18	S.GND
19	CLK	20	S.GND
21	B.CONT	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Applicable connector:
FCN-607B026-G/D

Power Supply Connector

FCN-814P009-TA (Fujitsu)

Pin No.	Signal
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *

Applicable connectors:
FCN-813J009-A housing (Fujitsu)
FCN-813J-T/A contact (Fujitsu)


* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

FPF8050HRUE-121


Plasma Display Unit

The FPF8050HRUE-121 plasma graphics display unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. Fujitsu's proprietary control method provides a clear display with a 4-level gray scale. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HRUE-121 a highly reliable display device.

- Bright, even, orange-on-black display
- Four-level gray scale
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

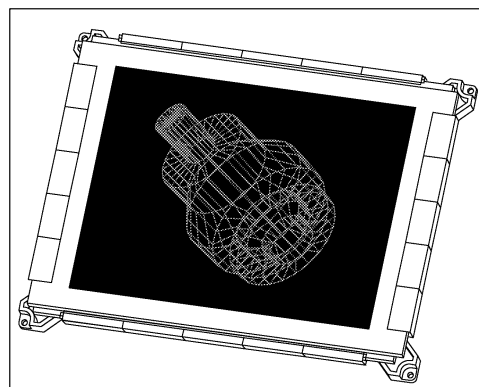

BLOCK DIAGRAM

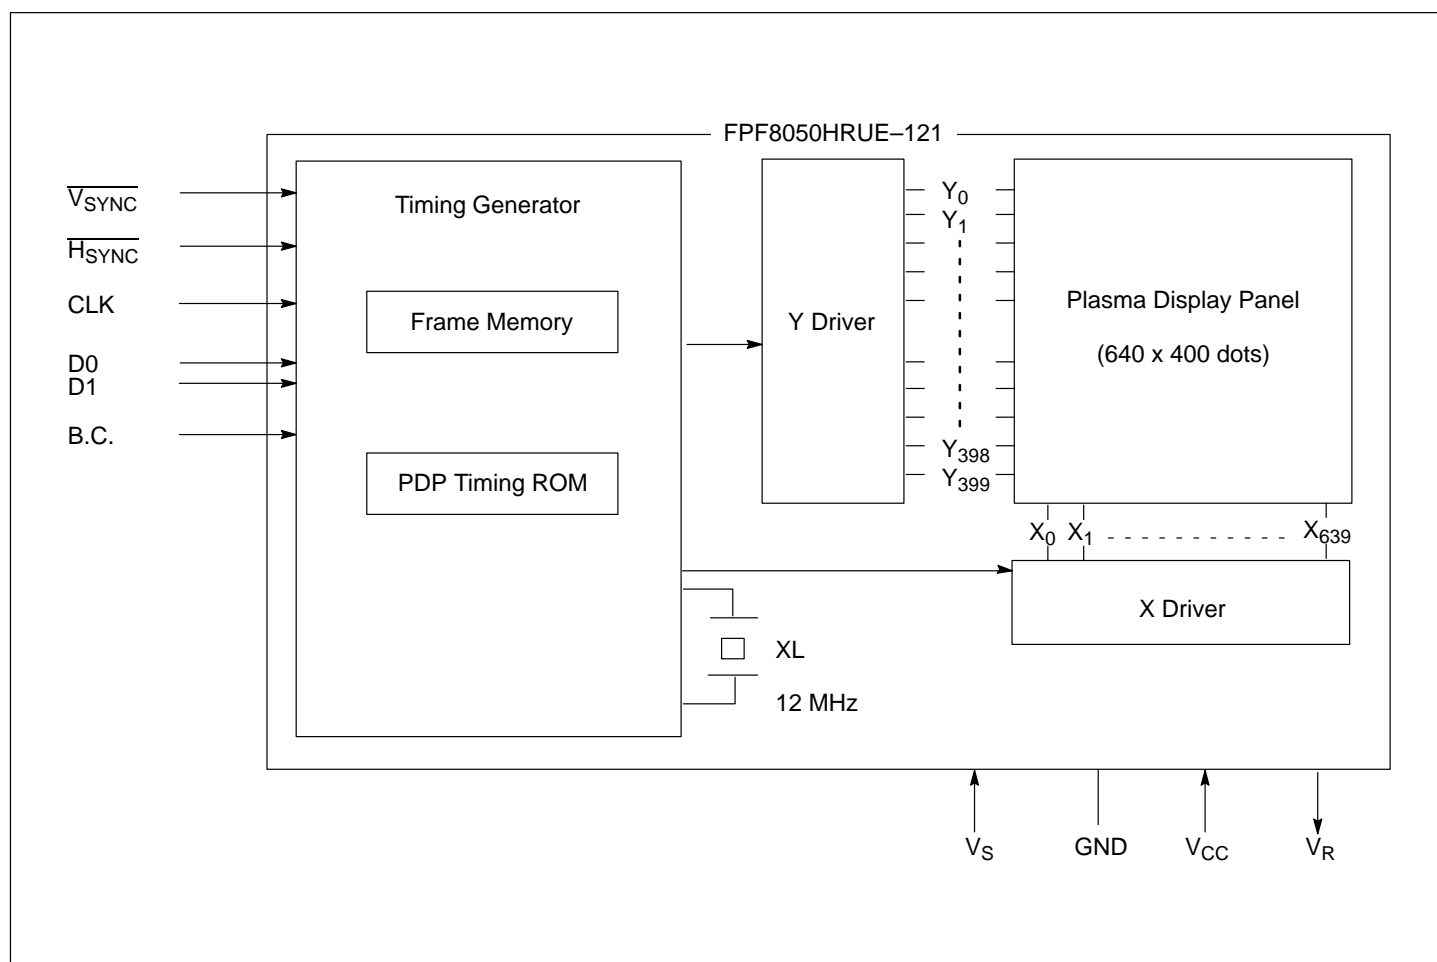

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Rating
Supply Voltage for Sustain	V_S	+120 V
Supply Voltage for Logic	V_{CC}	+7 V

DC Characteristics

	Item	Symbol	Condition	Min.	Typ.	Max.	Unit
For Display	Voltage	V_S	Variable ^{1,2}	88	95	100.5	V
	Ripple/Noise	V_{NRS}	At Resistive Load	—	—	500	mV
	Stability (Average)	—	At Resistive Load	—	—	±1.5	%
	Set-up Stability	—	Tolerance of equation in Note 2	—	—	±0.5	%
	Stability (Peak)	—	($I_S = 2$ A)	—	—	-5	%
	Current (Average) ^{3,4,5}	I_S	$T_{HSYNC} = 42 \mu s/H$ $T_{HSYNC} = 34 \mu s/H$	50 50	150 150	270 325	mA
	Current (Peak)	I_{SP}	1 μs width at $I_{SP} = 1$ A and 5 to 8 μs cycle	0.5	—	2	A
For Logic	Voltage	V_{CC}		4.75	5	5.25	V
	Ripple/Noise	V_{NRC}	At Resistive Load	—	—	200	mV
	Stability	—	At Resistive Load	—	—	±5	%
	Current (Average)	I_{CC}		150	250	500	mA

- Notes:**
- ¹ A variable power supply is required for voltage V_S (for display) because each display unit requires a specific voltage within range specified in the above table.
 - ² The specific voltage for V_S is indicated on each display unit. However, when V_R (reference voltage) is used, it adjusts the specified voltage automatically. Each display unit outputs a specific V_R voltage corresponding to the V_S voltage required by that display unit. The relationship between V_S and V_R is as follows:

$$V_S = 88 + V_R \times 5 \text{ (V)}$$
 Example: $V_S = 93 \text{ V} \rightarrow V_R = 2.0 \text{ V}$
 - ³ Current I_S is specified at condition below:
 - (1) Minimum displayed ratio = 0%
 - (2) Typical displayed ratio = 33% (Character "B" is displayed on white screen)
 - (3) Maximum displayed ratio = 100%
 - ⁴ The I_S value in the table above is the value at the 42 μs and 34 μs cycle period of $\overline{H_{SYNC}}$. The I_S value changes corresponding to the cycle period of $\overline{H_{SYNC}}$.
 - ⁵ Current I_S is 0 mA under following conditions:
 - (1) When V_{CC} is not supplied.
 - (2) During the period of three frames after V_{CC} begins to be supplied. (Operation starts after three pulses of $\overline{V_{SYNC}}$ are input).
 - (3) When $\overline{H_{SYNC}}$ is not input.
 - (4) When CLK is not input.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of Display Dots	640 (H) × 400 (V) dots (256,000 dots)
Dot Pitch	0.3 (H) mm × 0.3 (V) mm (0.012 in. × 0.012 in.)
Dot Size	Approximately 0.2 mm (0.008 in.) dia.
Display Resolution	85 dpi
Effective Screen Area	191.7 (H) mm × 119.7 (V) mm (7.547 in. × 4.713 in.)
Gray Scale	4 levels Approximately 100%, 67%, 33%, and 0%
Display Color	Neon orange
Dot Brightness (peak) (plane average)	110 cd/m ² (43.5 fL) at maximum brightness level 15 cd/m ² (5.9 fL)
Brightness Control	Variable from 0 to 100% by brightness control signal
Contrast Ratio	1:20 (min.)
Viewing Angle	160° (min.)
Brightness Unevenness	30% (max.)
Weight	Approximately 900 g

Performance Specifications


Item	Value
Vibration	
Frequency:	10 to 55 Hz
Acceleration:	2 G (max.)
Time:	Operation: 5 min in X, Y, and Z direction Non-Operation: 2 hr. in X, Y, and Z direction
Shock	
Acceleration:	40 G (max.) in X and Y direction 20 G (max.) in Z direction
Time:	11 ms (max.)
Operating Temperature	0°C to +50°C
Storage Temperature	-20°C to +70°C
Humidity	20 to 80% RH (no condensation)
Atmospheric Pressure Durability	Operation: 70,000 to 111,400 Pa (1 Pa = 1.403 e-3 psi) Non-Operation: 34,000 to 111,400 Pa

Physical Construction and Operation

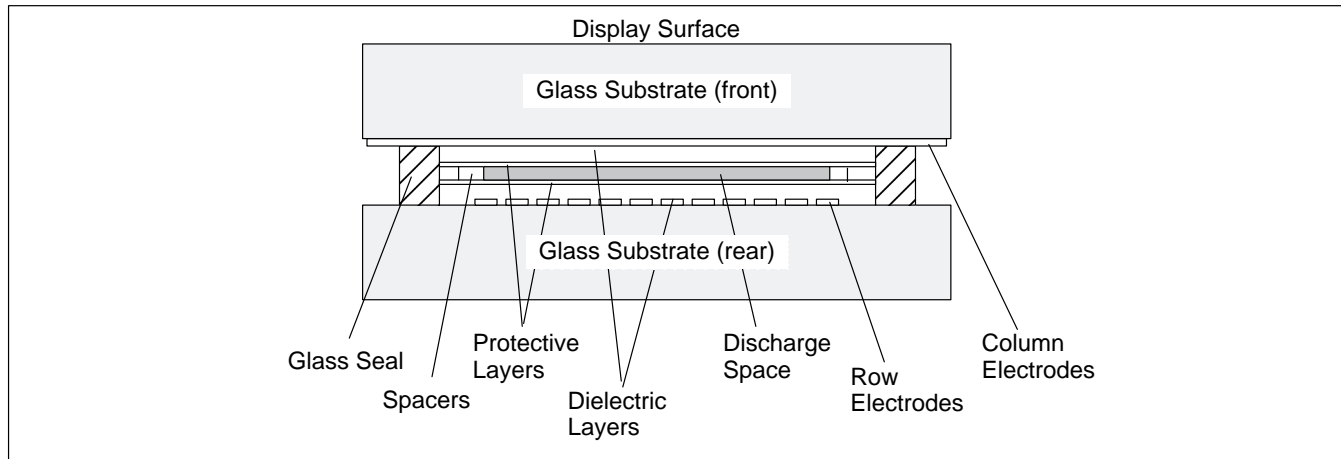


The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

Plasma Display External Dimensions

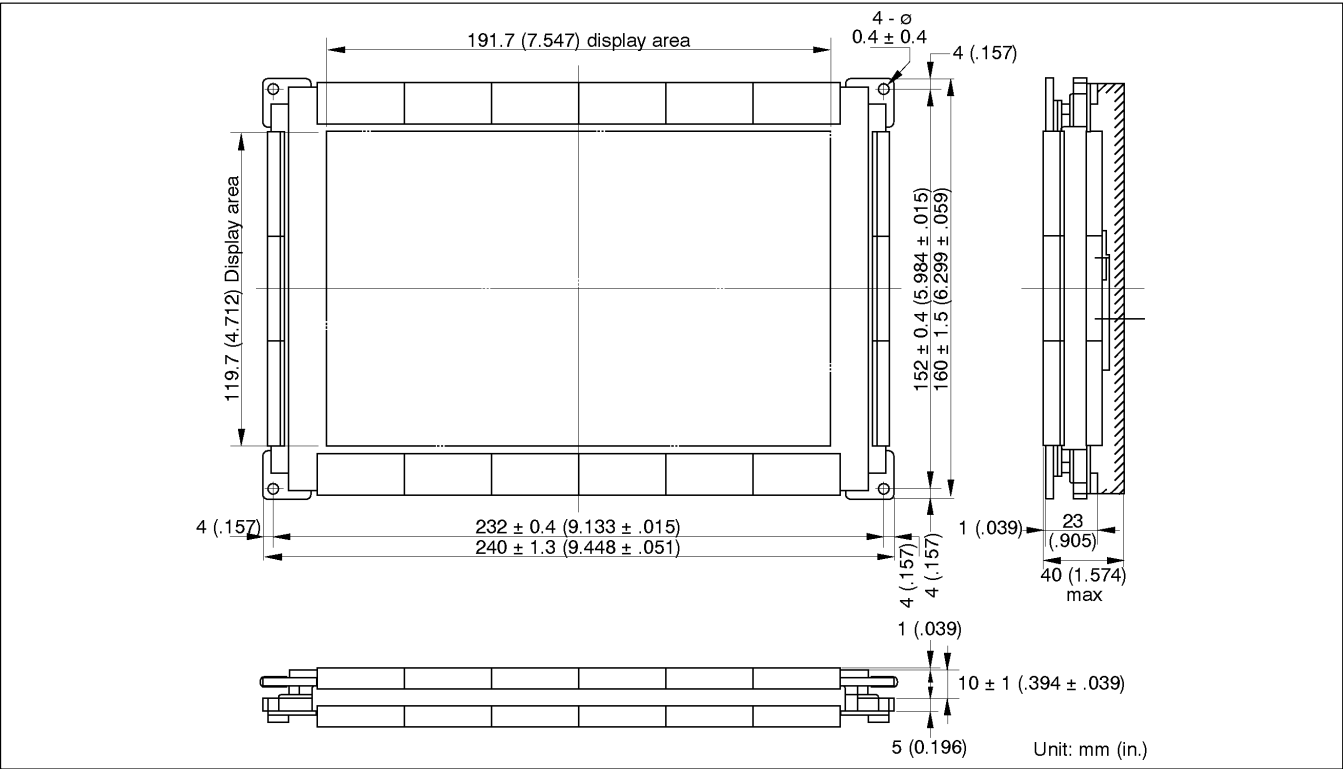

Connector External Dimensions

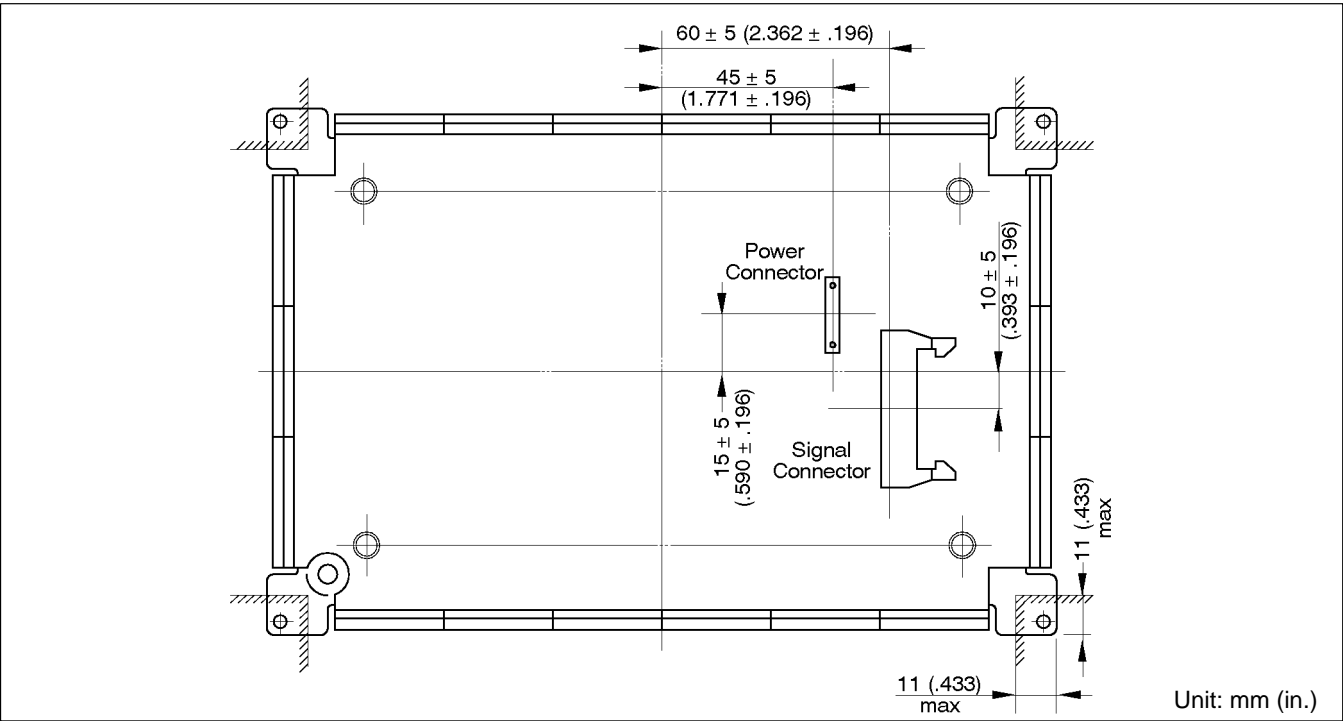


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Signal Line	Definition and Function																				
Data Signal	D0 D1	2 Lines	<p>Signal for 2 bits display data. Logic: H = Light On, L = Light Off. The figure on the following page shows the relationship between display data and display dots.</p> <p>Relationship Between Display Data and Gray Scale Level</p> <table> <tr> <th>D1</th><th>D0</th><th>Gray Scale Level</th><th>(Relative Brightness)</th></tr> <tr> <td>0</td><td>0</td><td></td><td>0%</td></tr> <tr> <td>0</td><td>1</td><td>low</td><td>(33%)</td></tr> <tr> <td>1</td><td>0</td><td>medium</td><td>(67%)</td></tr> <tr> <td>1</td><td>1</td><td>high</td><td>(100%)</td></tr> </table>	D1	D0	Gray Scale Level	(Relative Brightness)	0	0		0%	0	1	low	(33%)	1	0	medium	(67%)	1	1	high	(100%)
D1	D0	Gray Scale Level	(Relative Brightness)																				
0	0		0%																				
0	1	low	(33%)																				
1	0	medium	(67%)																				
1	1	high	(100%)																				
Clock Signal	CLK	1 Line	<p>The input signal which controls the input timing of the display data. The dot data is read into the shift register at the rising edge of each signal.</p> <p>The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.</p>																				
Horizontal Synchronous Signal	$\overline{H_{SYNC}}$	1 Line	<p>The input signal which controls the scanning timing of the line electrode. Y address increment to select the next line electrode is done at the falling edge of each signal.</p> <p>The number of $\overline{H_{SYNC}}$ signals during the period $\overline{V_{SYNC}}$ must be 402 or more even numbers. This signal is input continuously at a constant interval.</p>																				
Vertical Synchronous Signal	$\overline{V_{SYNC}}$	1 Line	<p>The input signal which controls the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the $\overline{V_{SYNC}}$ signal.</p>																				
Brightness Control Signal	B.C.	1 Line	<p>The input signal which controls the screen brightness. Brightness is at its maximum at logic high, and 0% of the maximum at logic low.</p>																				

Relationship Between Display Data and Display Dots

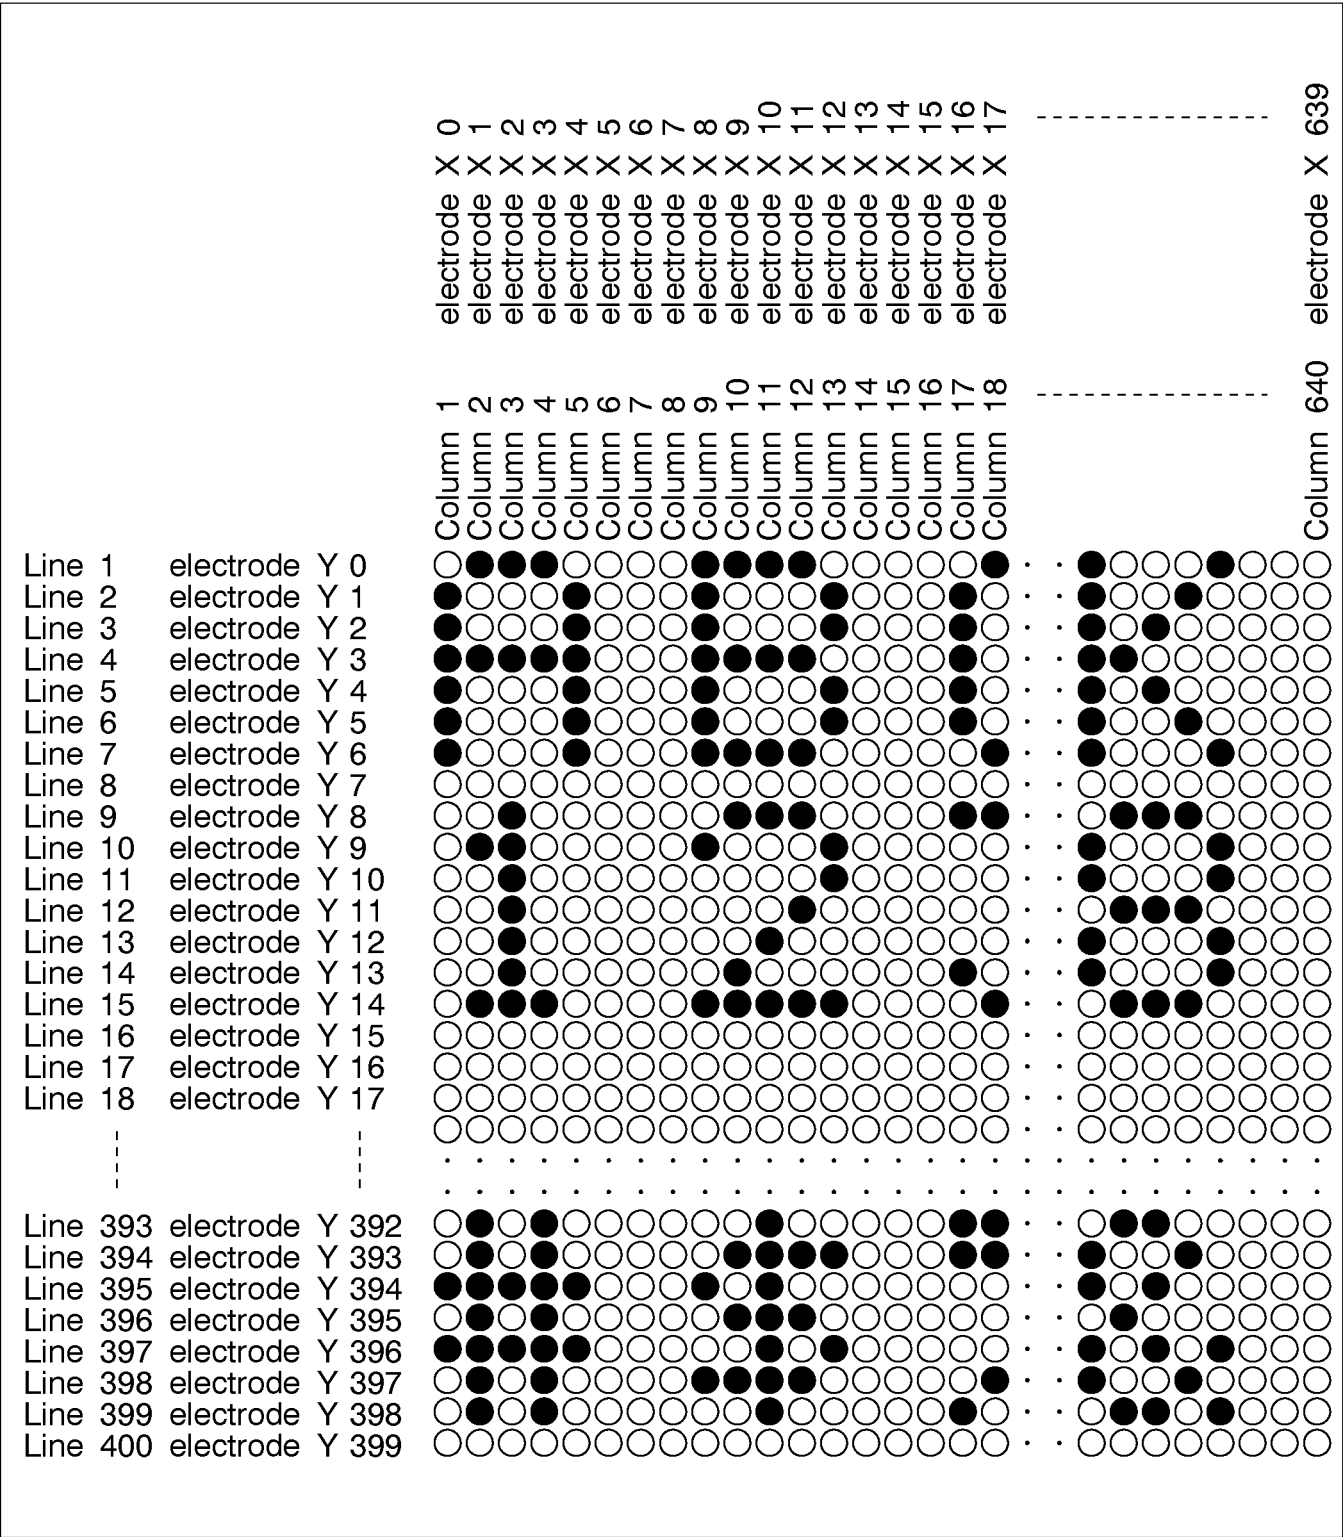

INTERFACE SIGNALS


Type of Signals (TTL Compatible)

Signal	Symbol	Signal Line	Definition and Function																				
Data Signal	D0 D1	2 Lines	<p>Signal for 2 bits display data. Logic: H = Light On, L = Light Off. The figure on the following page shows the relationship between display data and display dots.</p> <p style="text-align: center;">Relationship Between Display Data and Gray Scale Level</p> <table border="1"> <thead> <tr> <th>D1</th><th>D0</th><th>Gray Scale Level</th><th>(Relative Brightness)</th></tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td></td><td>0%</td></tr> <tr> <td>0</td><td>1</td><td>low</td><td>(33%)</td></tr> <tr> <td>1</td><td>0</td><td>medium</td><td>(67%)</td></tr> <tr> <td>1</td><td>1</td><td>high</td><td>(100%)</td></tr> </tbody> </table>	D1	D0	Gray Scale Level	(Relative Brightness)	0	0		0%	0	1	low	(33%)	1	0	medium	(67%)	1	1	high	(100%)
D1	D0	Gray Scale Level	(Relative Brightness)																				
0	0		0%																				
0	1	low	(33%)																				
1	0	medium	(67%)																				
1	1	high	(100%)																				
Clock Signal	CLK	1 Line	<p>The input signal which controls the input timing of the display data. The dot data is read into the shift register at the rising edge of each signal.</p> <p>The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.</p>																				
Horizontal Synchronous Signal	$\overline{H_{SYNC}}$	1 Line	<p>The input signal which controls the scanning timing of the line electrode. Y address increment to select the next line electrode is done at the falling edge of each signal.</p> <p>The number of $\overline{H_{SYNC}}$ signals during the period $\overline{V_{SYNC}}$ must be 402 or more even numbers. This signal is input continuously at a constant interval.</p>																				
Vertical Synchronous Signal	$\overline{V_{SYNC}}$	1 Line	<p>The input signal which controls the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the $\overline{V_{SYNC}}$ signal.</p>																				

Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}		16.7	20	ms	Frame Frequency: 60 Hz
t_{WV}	1			H	H: Cycle of Horizontal Sync. Signal
t_{VH}	1			μs	
t_{HV}	2			μs	
T_{HSYNC}	35	42	45	μs	
t_{WH}	2	5		μs	
t_{HC}	2			μs	
t_{CH}	2	3		μs	
T_{CLK}	34			ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{WCLK1}	22			ns	
t_{WCLK2}	22			ns	
t_{SUD}	22			ns	
t_{HD}	22			ns	

Interface Signal Timing Chart

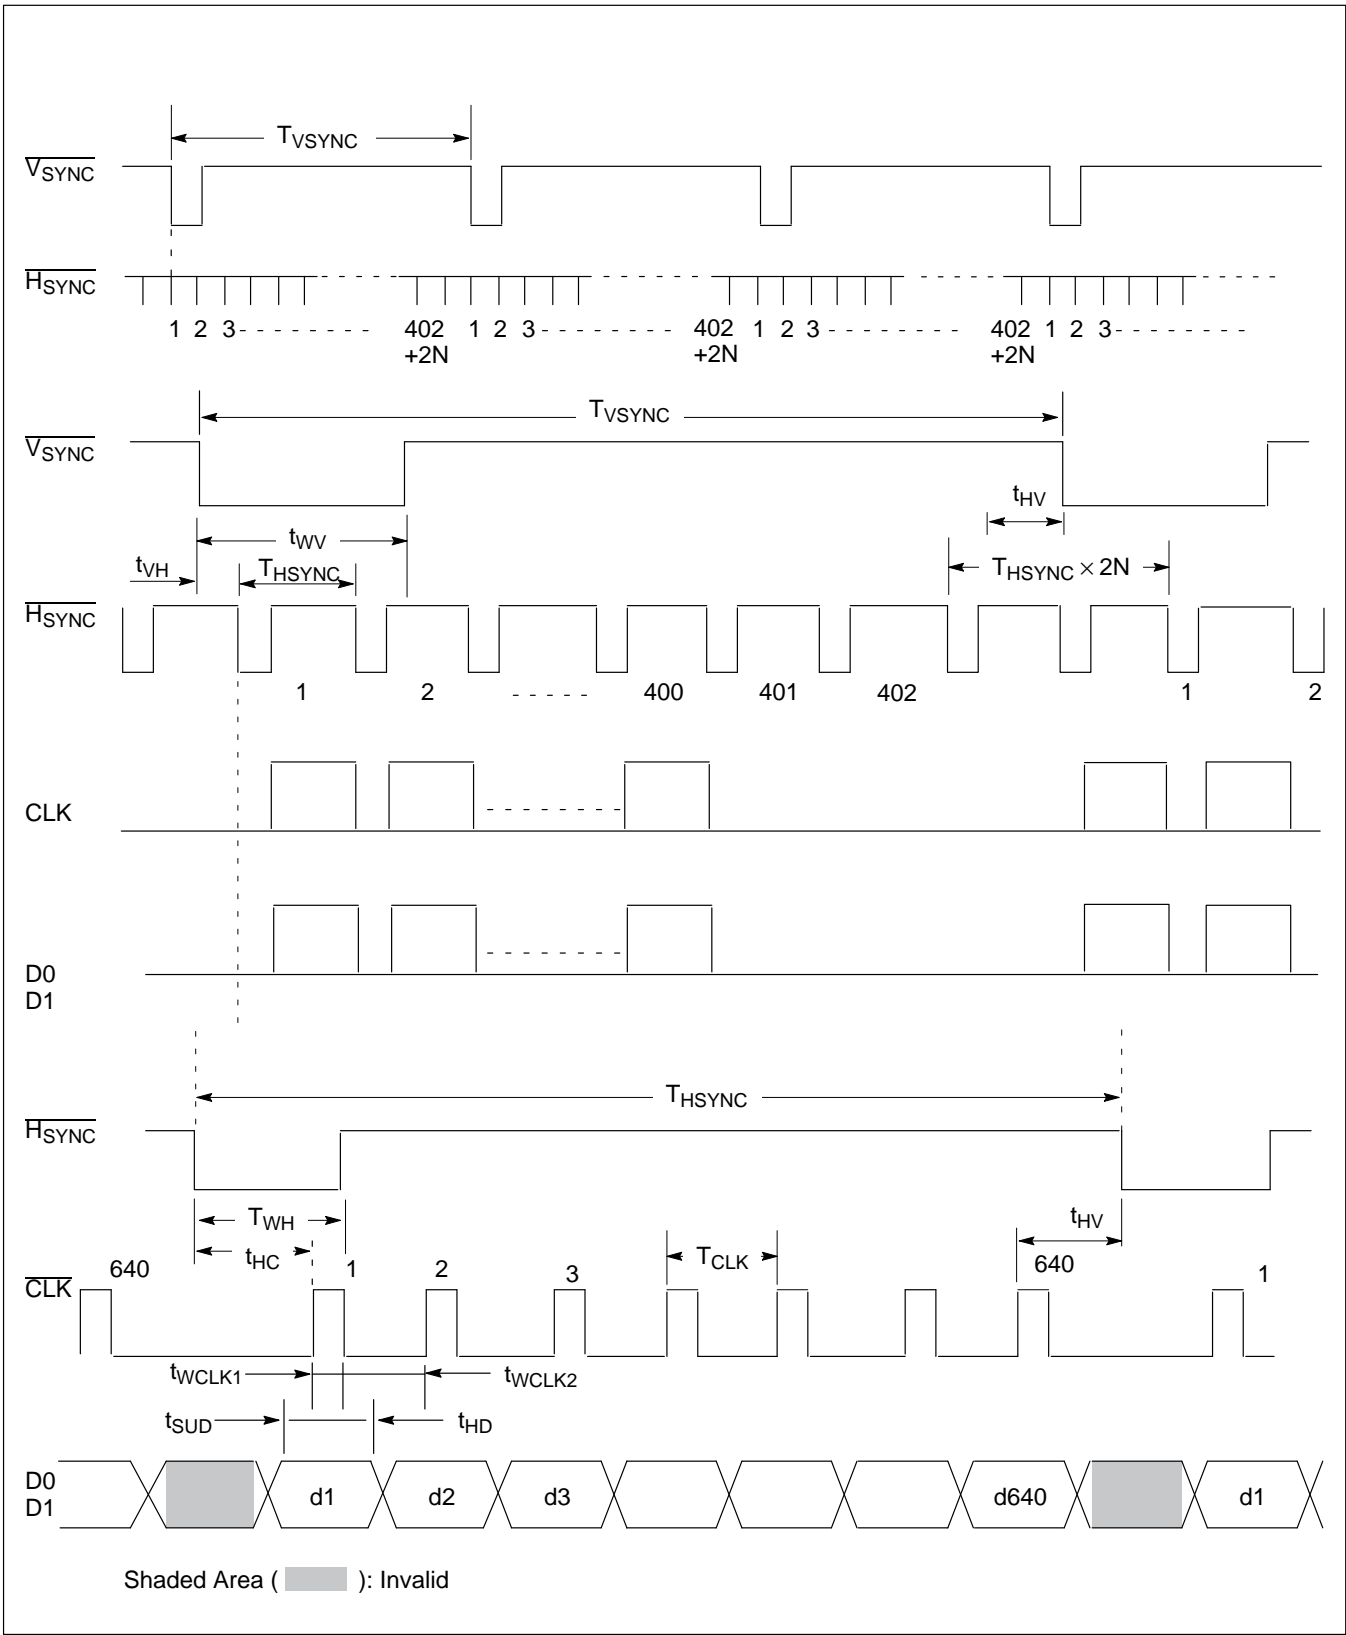


Brightness Control Signal Timing

The brightness of the screen is controlled by the pulse form of the brightness control (B.C.) signal. Brightness varies with the duty cycle of the B.C. signal. Pulse condition and timing are shown below.


Symbol	Min.	Typ.	Max.	Unit	
T _B	—	2 × V/N	—	H	H: A Cycle of H _{SYNC} Signal
T _{BH}	—	—	2 × V/N	H	

Notes: V: A cycle of $\overline{V_{SYNC}}$ /A Cycle of $\overline{H_{SYNC}}$
N: Integer

Brightness Control Signal Timing Chart

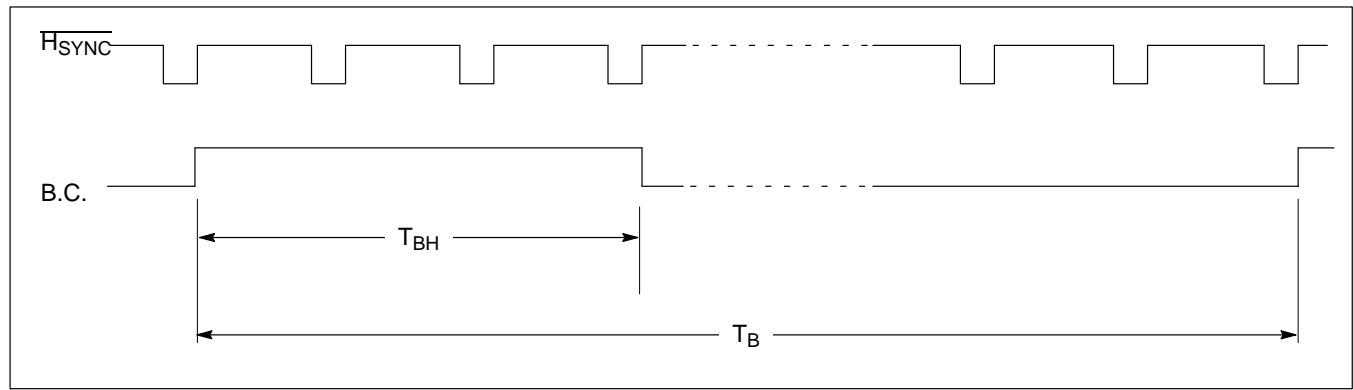

Interface Circuit

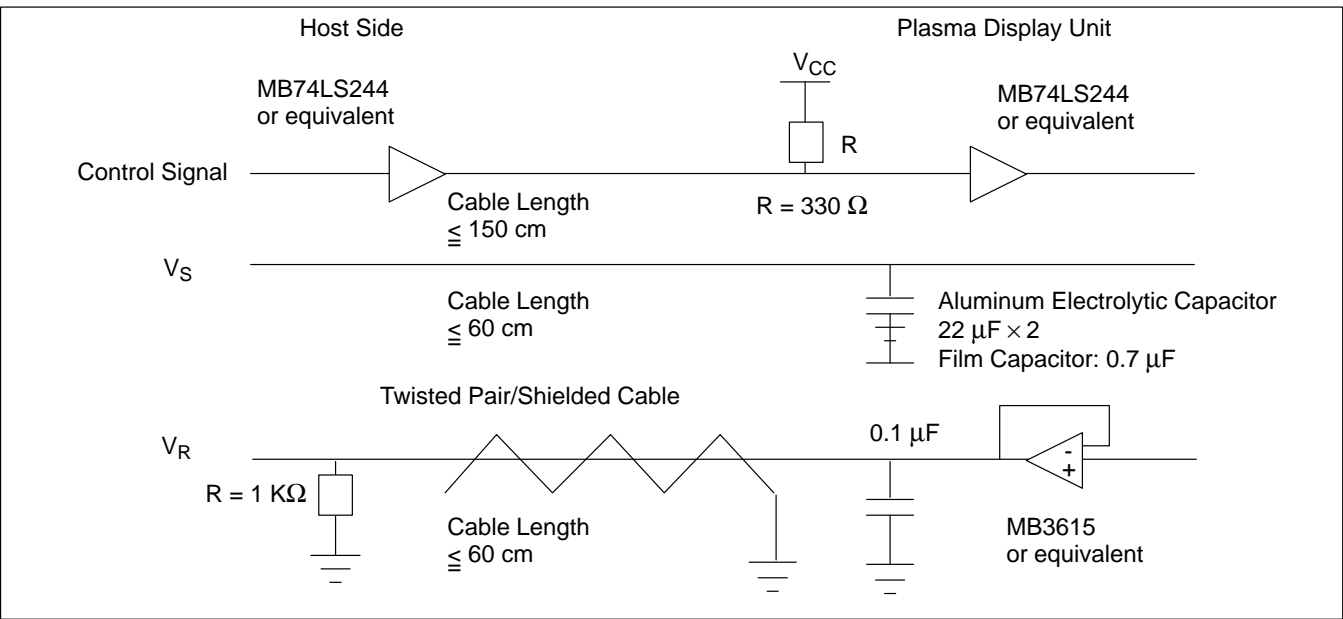

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q026-G/S (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{F_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D0	16	S.GND
17	D1	18	S.GND
19	CLK	20	S.GND
21	B.C.	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Note: Applicable connector:
FCN-607B026-G/C

Power Supply Connector

FCN-815P009-TA (Fujitsu)

Pin No.	Signal
1	V _{CC}
2	GND
3	N.C.
4	GND
5	V _S
6	N.C.
7	N.C.
8	GND
9	V _R

Notes: This PDP unit outputs the voltage V_R from 0 to 2.5 VDC through the ninth terminal of the power supply connector. This supply voltage is used for the supply voltage adjustment of FPF07P-AC100.


Applicable connectors:
FCN-813J009-A housing
FCN-813J-T/Q contact for hand tool
FCN-813J-T/R contact for auto

FPF8050HRUK


Plasma Display Graphics Unit

The FPF8050HRUK plasma graphics display unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. Fujitsu's proprietary control method provides a clear display with a four-level gray scale. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HRUK a highly reliable display device.

- Bright, even, orange-on-black display
- Four-level gray scale
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

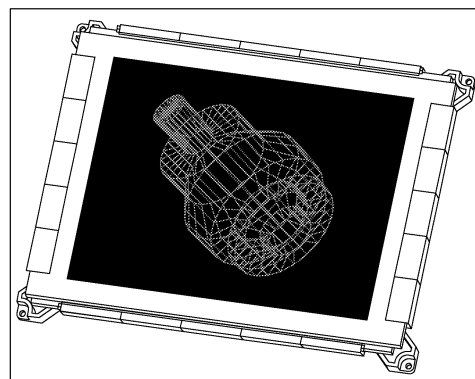

BLOCK DIAGRAM

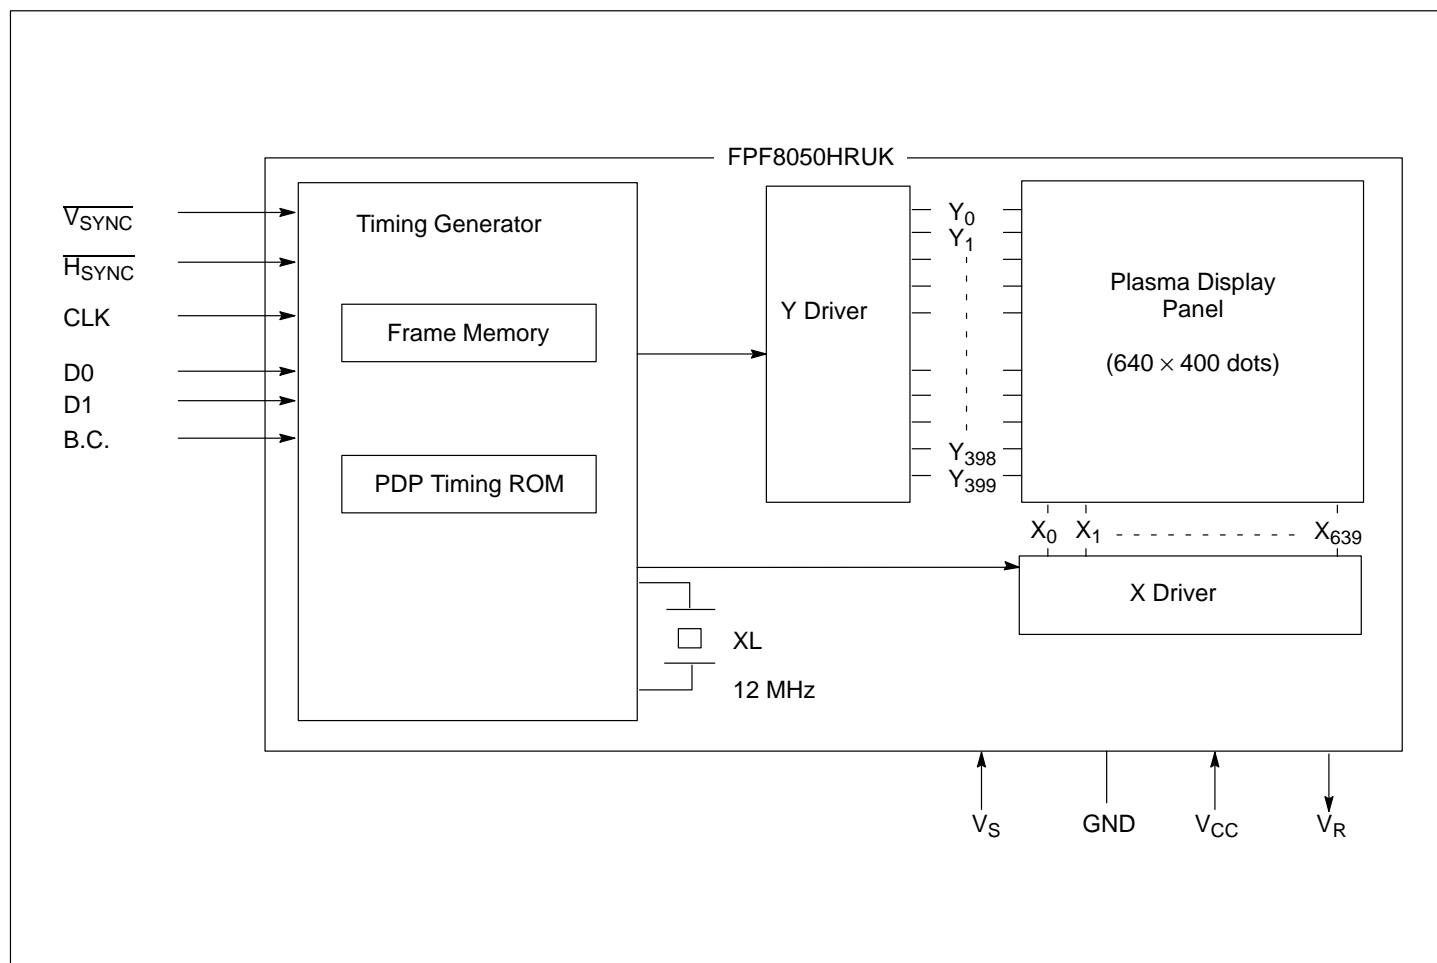

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Rating
Supply Voltage for Sustain	V_S	+120 V
Supply Voltage for Logic	V_{CC}	+7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Ripple (mV _{PP})	Stability
Supply Voltage for Sustain ^{1,2}	V_S	88	95	100.5	V	500 max.	± 2 % max.
Supply Voltage for Logic	V_{CC}	4.75	5.0	5.25	V	50 max.	± 5 % max.
Supply Current for Sustain ($V_S = 95$ V)	I_S			310	mA		
Supply Current for Logic ($V_{CC} = 5$ V)	I_{CC}	150		450	mA		
Signal Input Voltage (H-Level)	V_{IH}	2.0		5.25	V		
Signal Input Voltage (L-Level)	V_{IL}	-0.5		0.4	V		
Signal Input Current ($V_{IH} = 2.75$ V) ($V_{CC} = 5.25$ V)	I_{IH}			20	μA		
Signal Input Current ($V_{IL} = 0.4$ V) ($V_{CC} = 5.25$ V)	I_{IL}			-16	mA		

Notes: ¹Power source is required to be variable from 88 to 100.5 VDC.

²Specified value of V_S is indicated on the back (components mounted side) of each unit. Supply voltage should be trimmed to this specified value

MECHANICAL SPECIFICATIONS

Physical Specifications


Item	Value
Number of Display Dots	640 (H) × 400 (V) dots (256,000 dots)
Dot Pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot Size	0.2 mm (0.008 in.) dia.
Display Resolution	77 dots per linear inch
Screen Size	210.87 (H) × 131.67 (V) mm (8.302 × 5.184 in.)
Display Color	Neon orange
Gray Scale	4-level (approx. 100%, 67%, 33%, and 0%)
Dot Brightness (peak)	110 cd/m ² (43.5 fL) max.
Brightness Control	Variable from 0 to 100% (Using B.C. signal)
Contrast Ratio	20:1 min.
Viewing Angle	160° min.
Weight	Approx. 900 g
External Dimensions	See External Dimension Figure

Performance Specifications

Item	Value
Operating Temperature	0 to +50 °C
Storage Temperature	-20 to +70 °C
Humidity	20 to 85% RH (no condensation)
Atmospheric Pressure Durability	Operation: 70,000 to 111,400 Pa Non-Operation: 34,000 to 111,400 Pa
Vibration Frequency: Acceleration: Time:	10 to 55 Hz 2 G (max.) Operation: 5 min in X, Y, and Z direction Non-Operation: 2 hr. in X, Y, and Z direction
Shock (non-operation) Acceleration: Time:	40 G (max.) in X and Y direction 20 G (max.) in Z direction 11 ms or less

FPF8050HRUK

External Dimensions

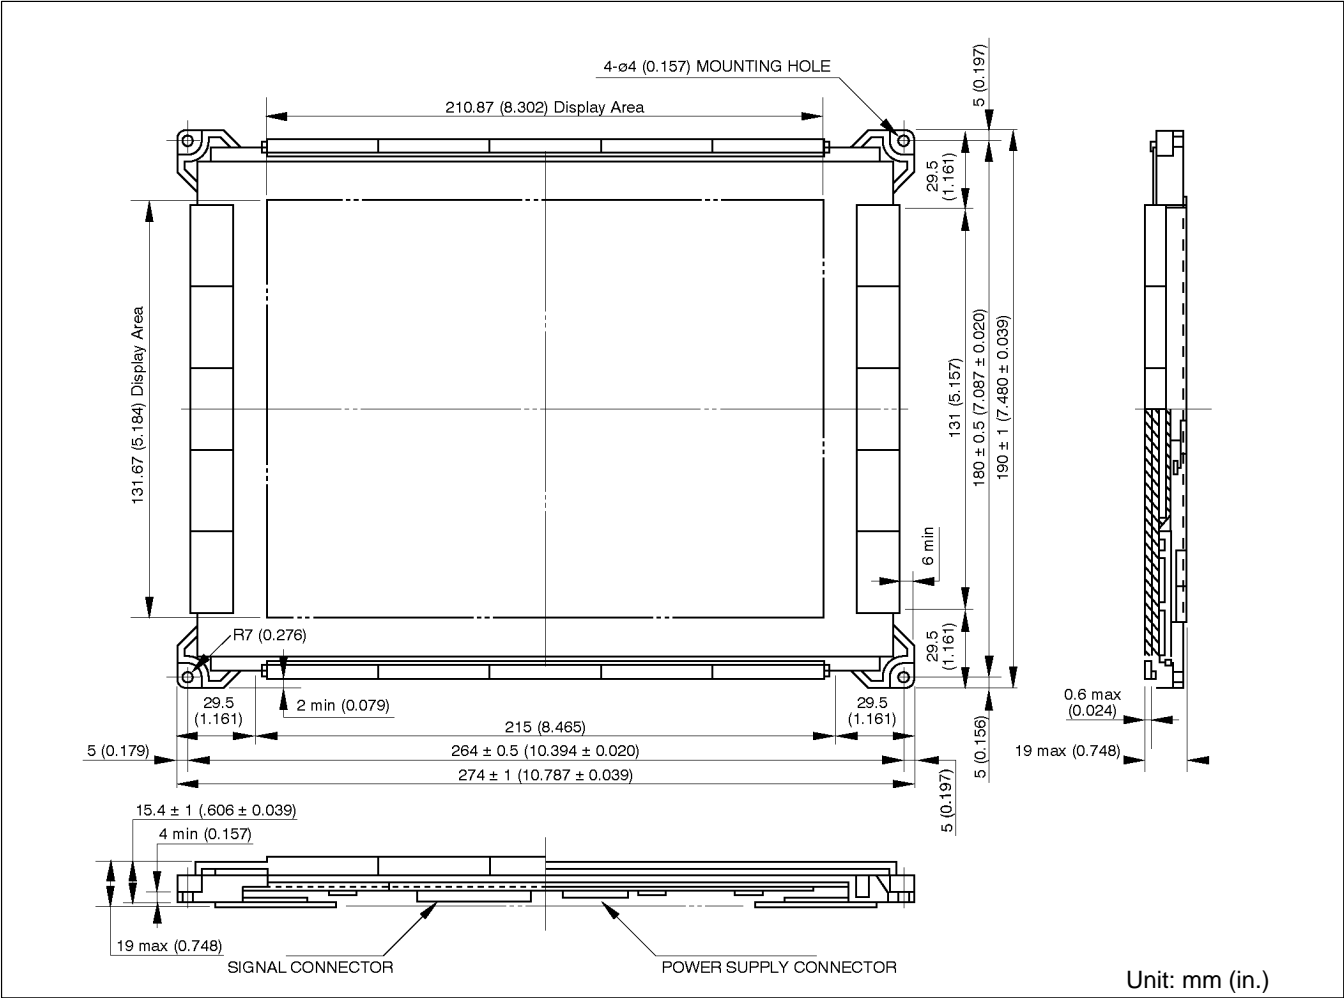


INTERFACE SIGNALS

Type of Signals

Signal	Symbol	Definition and Function															
Data	D0 D1	<p>2-bit data Dots are lit at logic high and are not lit at logic low. The figure on the next page shows the relationship between display data and display dots. Relationship Between Display Data and Gray Scale Level</p> <table> <tr> <th>D1</th><th>D0</th><th>Gray Scale Level (Relative Brightness)</th></tr> <tr> <td>0</td><td>0</td><td>0%</td></tr> <tr> <td>0</td><td>1</td><td>low – 33%</td></tr> <tr> <td>1</td><td>0</td><td>medium – 67%</td></tr> <tr> <td>1</td><td>1</td><td>high – 100%</td></tr> </table>	D1	D0	Gray Scale Level (Relative Brightness)	0	0	0%	0	1	low – 33%	1	0	medium – 67%	1	1	high – 100%
D1	D0	Gray Scale Level (Relative Brightness)															
0	0	0%															
0	1	low – 33%															
1	0	medium – 67%															
1	1	high – 100%															
Clock	CLK	The input signal which controls the input timing of the display data. Dot data is read into the shift register at the rising edge of each signal. The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.															
Line Synchronous	$\overline{H_{SYNC}}$	The input signal which controls the scanning timing of the line electrode. Y address increment to select the next line electrode is done at the falling edge of each signal. The number of $\overline{H_{SYNC}}$ signals during the period $\overline{V_{SYNC}}$ must be 402 or more even numbers.															
Frame Synchronous	$\overline{V_{SYNC}}$	The input signal which controls the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the $\overline{V_{SYNC}}$ signal.															
Brightness Control	B.C.	The input signal which controls the screen brightness. Brightness is at its maximum at logic high, and 0% of the maximum at logic low.															

Relationship Between Display Data and Display Dots

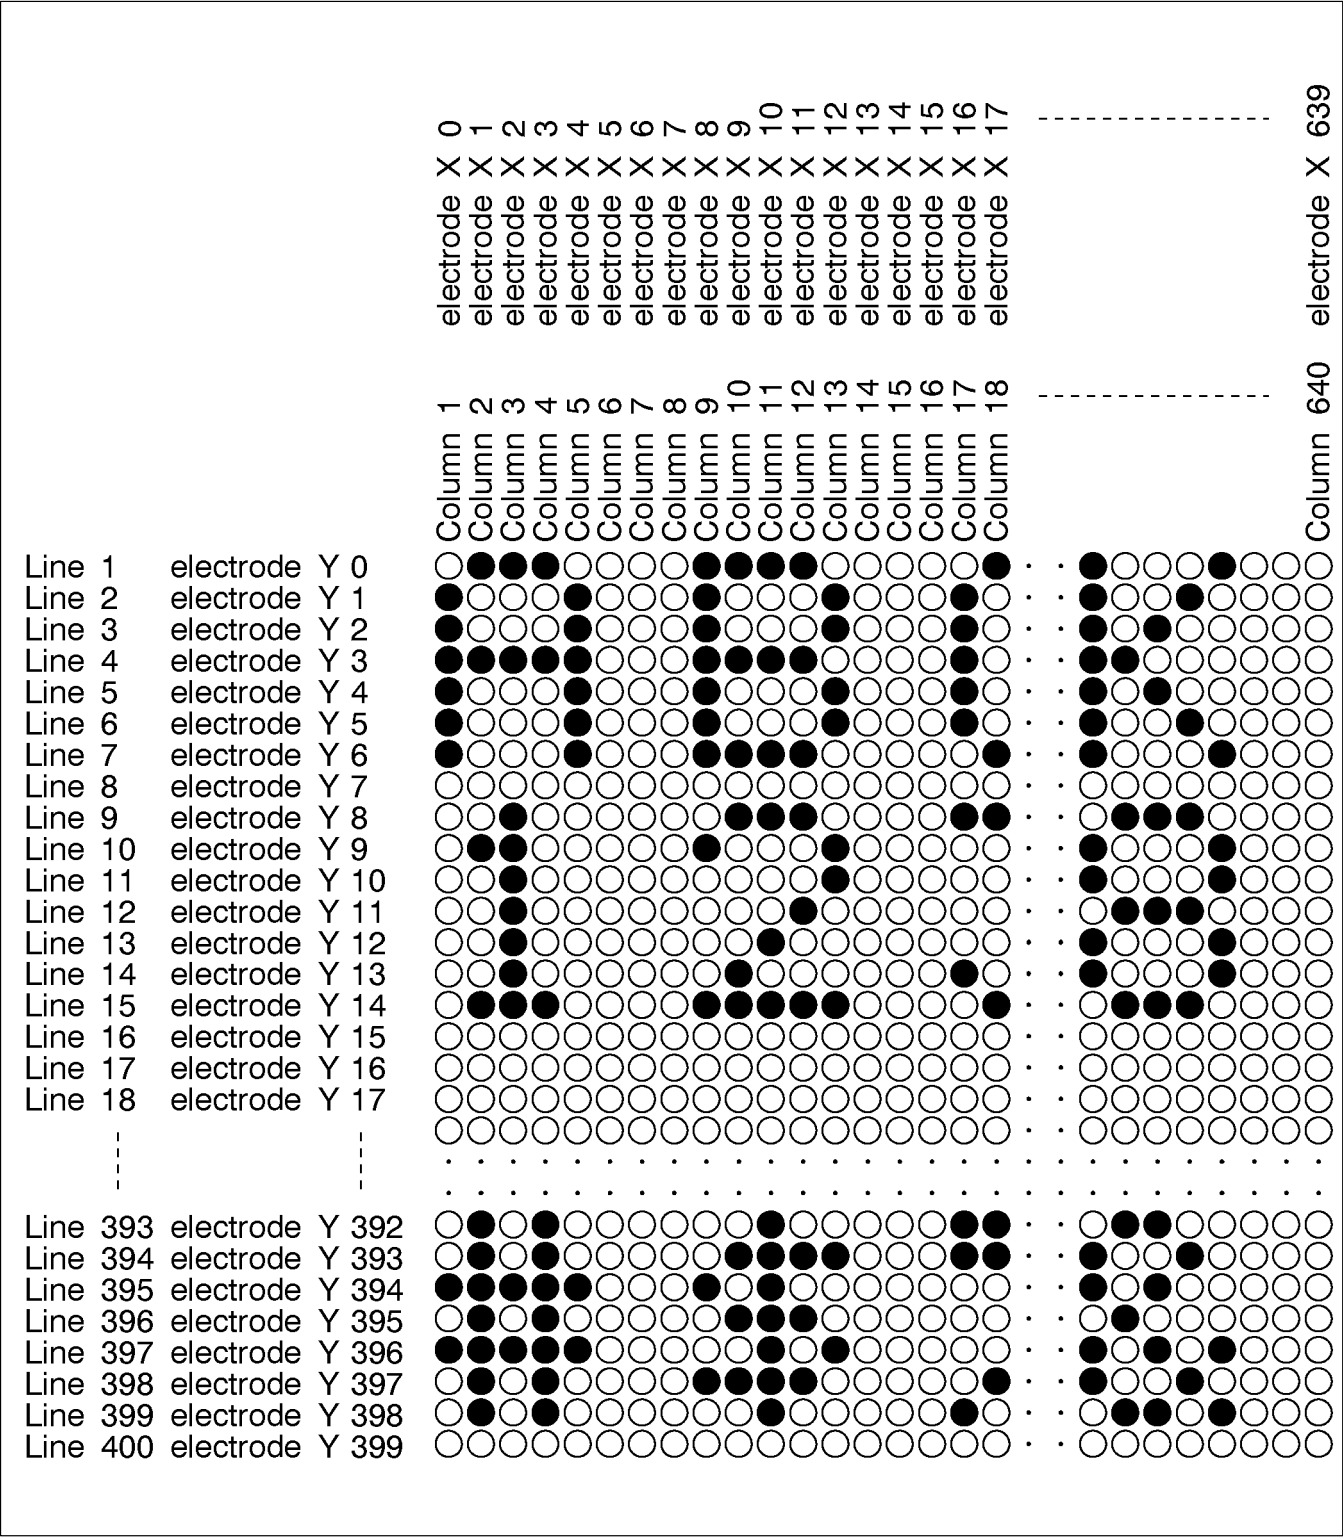


Interface Signal Timing

Symbol	Description	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	A Cycle of Vertical Synchronous Signal		16.7	20	ms	Frame Frequency: 60 Hz
t_{WV}^1	Pulse Width of Vertical Synchronous Signal	—	—	—	μs	
t_{VH}	Delay Time $\overline{V_{SYNC}} - \overline{H_{SYNC}}$	1			μs	
t_{HV}	Delay Time $\overline{H_{SYNC}} - \overline{V_{SYNC}}$	2			μs	
T_{Hsync}	A Cycle of Horizontal Synchronous Signal	40	42	45	μs	
t_{WH}	Pulse Width of Horizontal Synchronous Signal	2	5		μs	
t_{HC}	Delay Time $\overline{H_{SYNC}} - CLK$	2			μs	
t_{CH}	Delay Time $CLK - \overline{H_{SYNC}}$	2	3		μs	
T_{CLK}	A Cycle of Clock Signal	44			ns	
t_{WCLK1}^2	Pulse Width of Clock Signal (H)	22			ns	
t_{WCLK2}^2	Pulse Width of Clock Signal (L)	22			ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{SUD}	Set Up Time for Data	22			ns	
t_{HD}	Hold Time for Data	22			ns	

Notes: ¹ $t_{WV} > T_{Hsync}$

²Recommended ratio between t_{WCLK1} and T_{WCLK2} is 1:1

Interface Signal Timing Chart

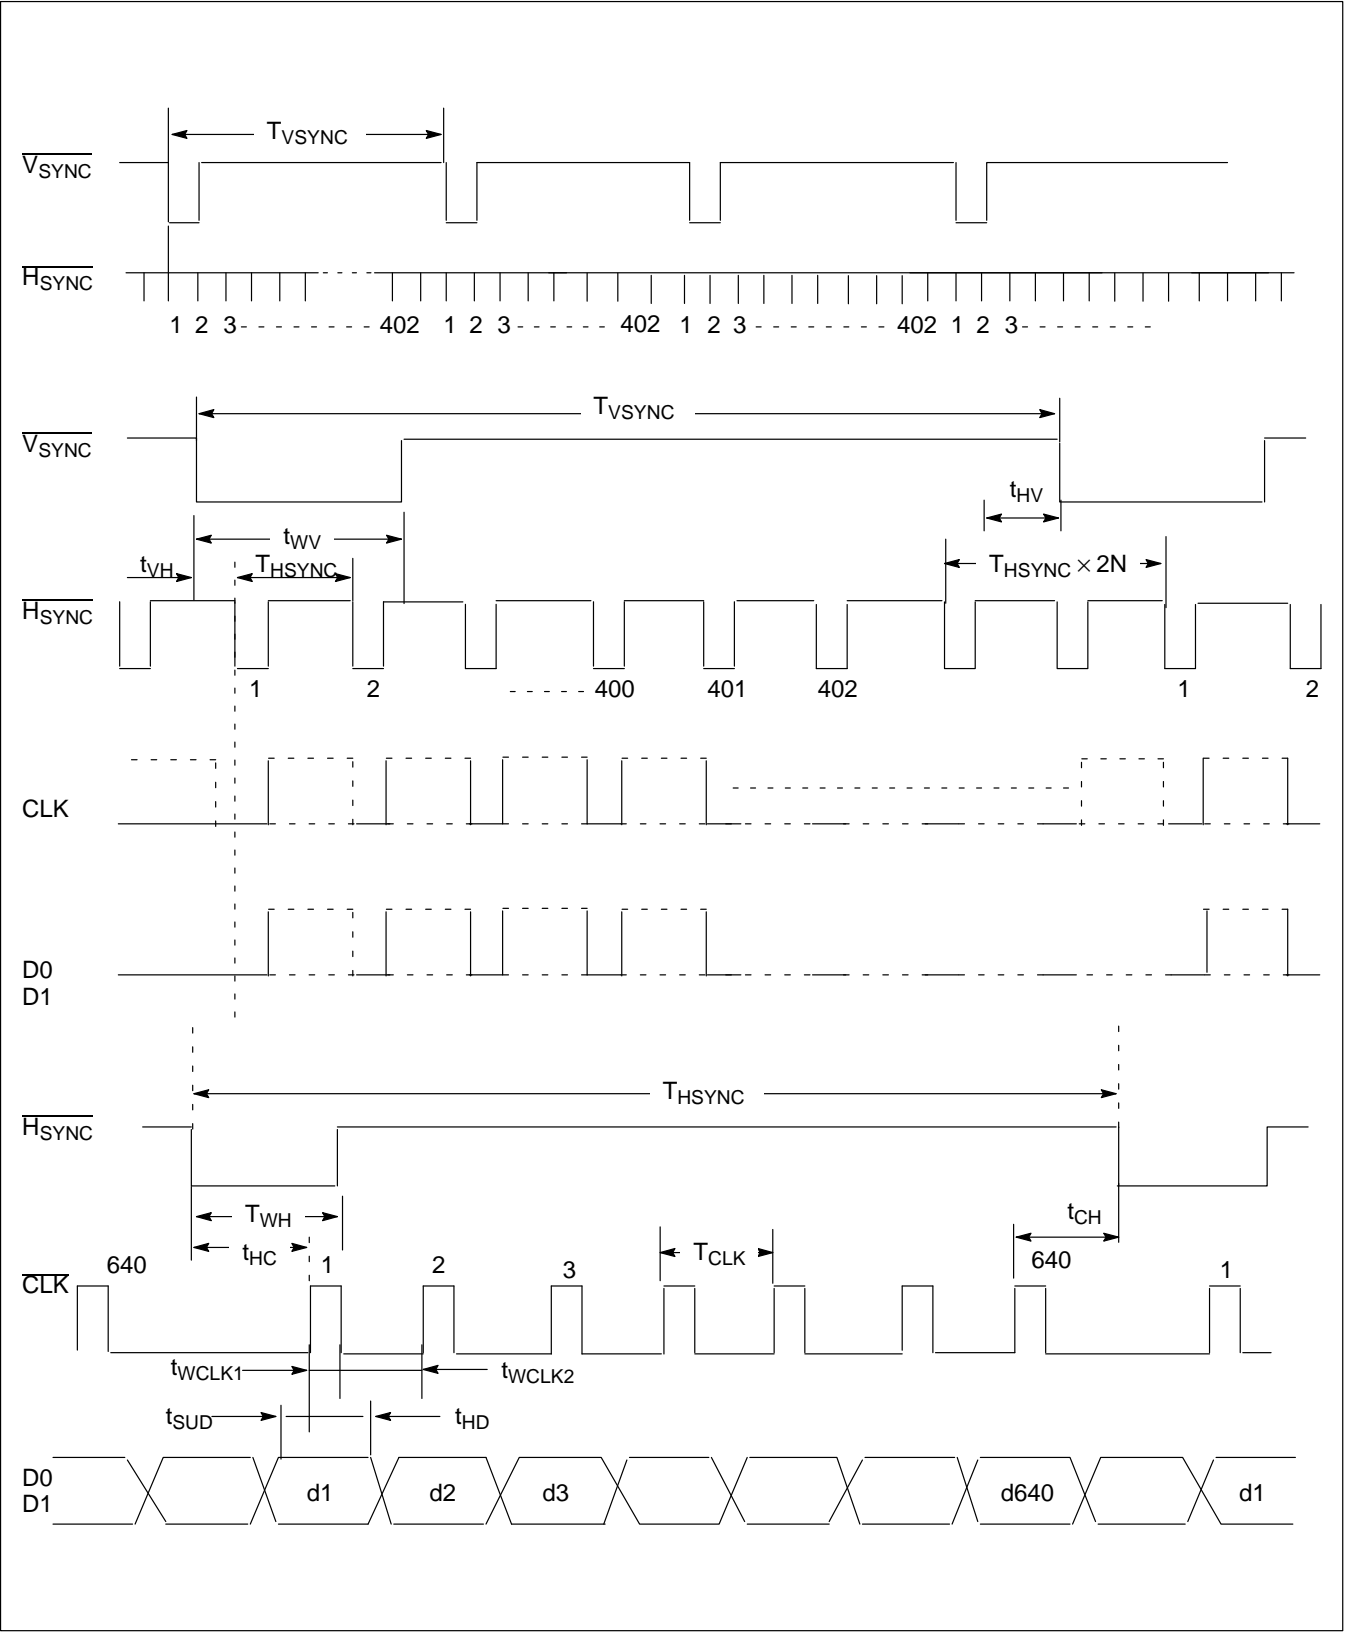


Brightness Control Signal Timing


The brightness control signal can be input with a pulse form signal. The brightness is variable from 0 to 100% depending on its duty cycle. Signal conditions are shown in the table below and in the interface circuit diagram.

Symbol	Min.	Typ.	Max.	Unit	Remark
T _{BA}	—	16	16	H	H: A cycle of line synchronous signal

Brightness Control Signal Timing Chart

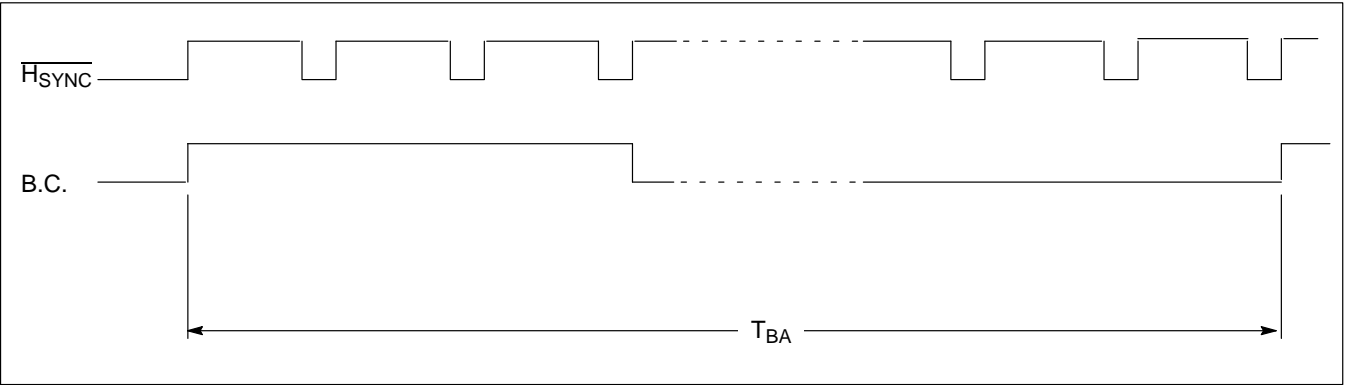

Interface Circuit

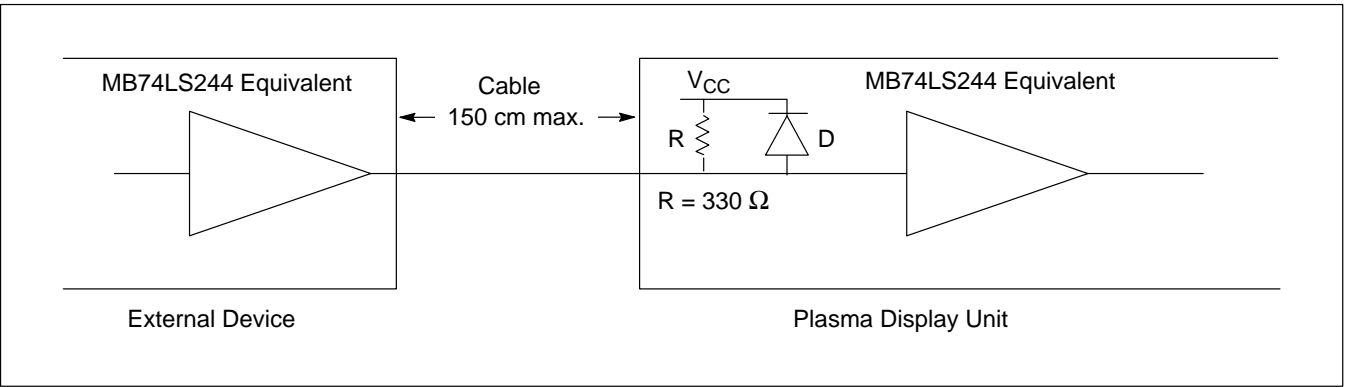

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q026-G/S

Pin No.	Symbol	Pin No.	Symbol
1	$\overline{V_{\text{SYNC}}}$	2	S. GND
3	$\overline{H_{\text{SYNC}}}$	4	S. GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S. GND
15	D0	16	S. GND
17	D1	18	S. GND
19	CLK	20	S. GND
21	B.C.	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Note: Applicable Connector:
FCN-607B026-G/D

N.C. means "No Connection."

Power Supply Connector

FCN-815P-009TA

Pin No.	Symbol
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *

Notes: Applicable Connectors:
FCN-813J009-A, Housing
FCN-813J-T/Q, Contact for Manual Use
FCN-813J-T/R, Contact for Automatic Use


* This plasma display unit outputs the voltage V_R from 0 to 2.5 VDC through the ninth terminal of the power supply connector. This supply voltage is used for the supply voltage adjustment of FPF07P-AC100 (power supply unit).

FPF8050HRUM


Plasma Display Graphics Unit

The FPF8050HRUM plasma display unit consists of an AC gas discharge plasma display unit with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8050HRUM a highly reliable display device.

- Bright, even, orange-on-black display
- No flicker or warp
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

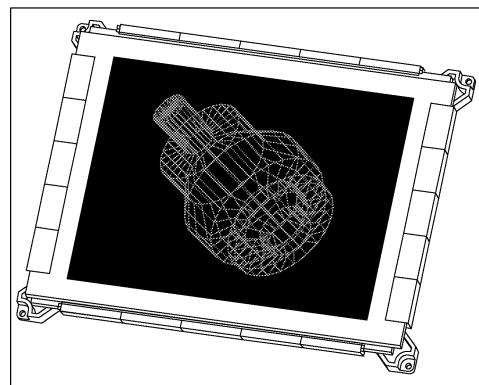

BLOCK DIAGRAM

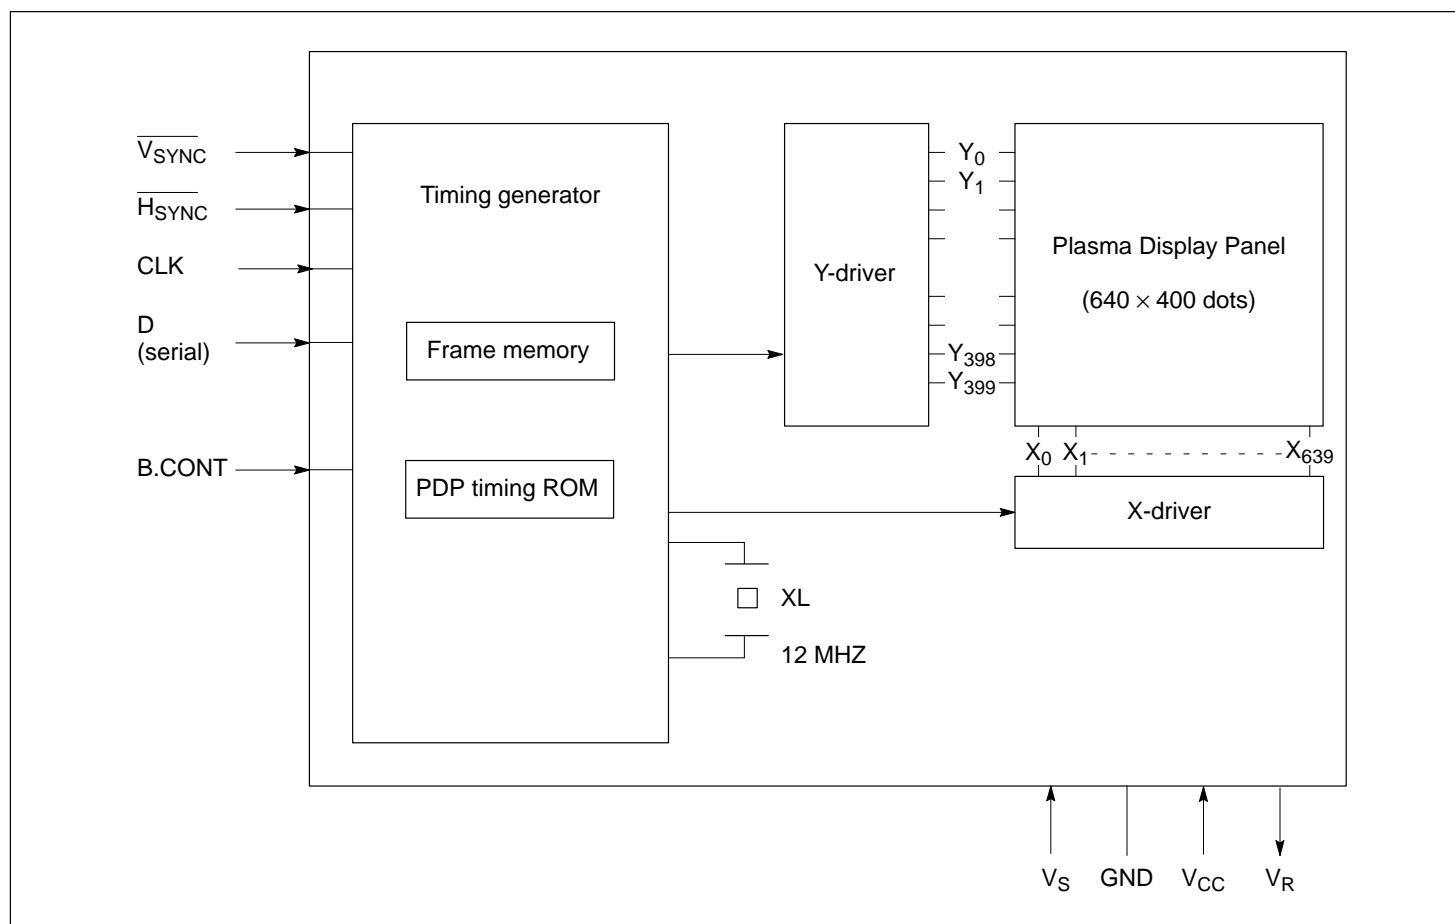

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			310	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.45	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.4	V
Signal input current for logic 0 ($V_{IL} = 2.75$ V)	I_{IL}			-16	mA

Note: * The power source is required to be variable from 88 to 100.5 VDC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of display dots	640 × 400 dots (256,000 dots)
Dot pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	211 (H) × 132 (V) mm (8.307 × 5.197 in.)
Display color	Neon orange
Brightness	110 cd/m ² (Peak) 15 cd/m ² (Average)
Contrast ratio	20 : 1 min
Viewing angle	160° min
Weight	Approx. 900 g
External dimensions	See External Dimensions

Performance Specifications

Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50 °C
Operating humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70 °C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

Physical Construction and Operation

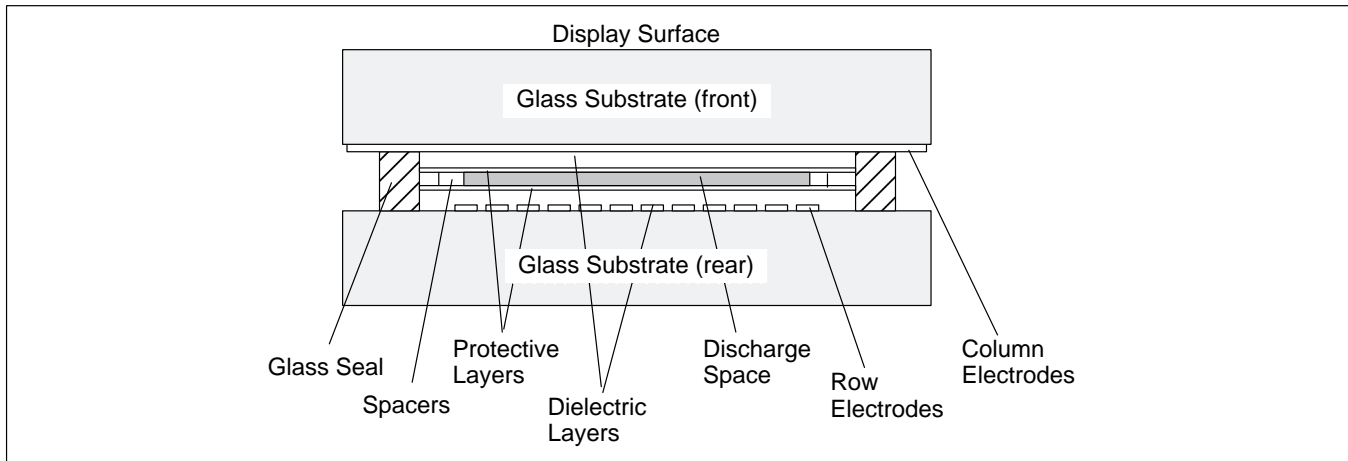

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

INTERFACE SIGNALS**Type of Signals (TTL Compatible)**

Signal	Symbol	Logic	Definition and Function
Display data	D	Posi	Serial display data. Relationship between display data and display dots is shown in the following figure.
Clock signal	CLK	Posi	The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.
Line synchronous	$\overline{H_{SYNC}}$	Nega	The number of $\overline{H_{SYNC}}$ signals in one cycle of $\overline{V_{SYNC}}$ must be 402 or more even numbers.
Frame synchronous	$\overline{V_{SYNC}}$	Nega	The input signal controls the refresh speed of the screen.
Brightness control	B.CONT		The input signal which controls the screen brightness. Brightness is its maximum at logical "High" and 33% of maximum at logical "Low."

[illegible]


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	39.6	—	ms
t_{WV}	T_{HSYNC}	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}^1	88	90	92	μs
t_{WH}	2	6	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ T_{HSYNC} ranges from 40 to 45 μs and from 60 to 65 μs are also available.
In these cases, brightness control range changes.

² Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

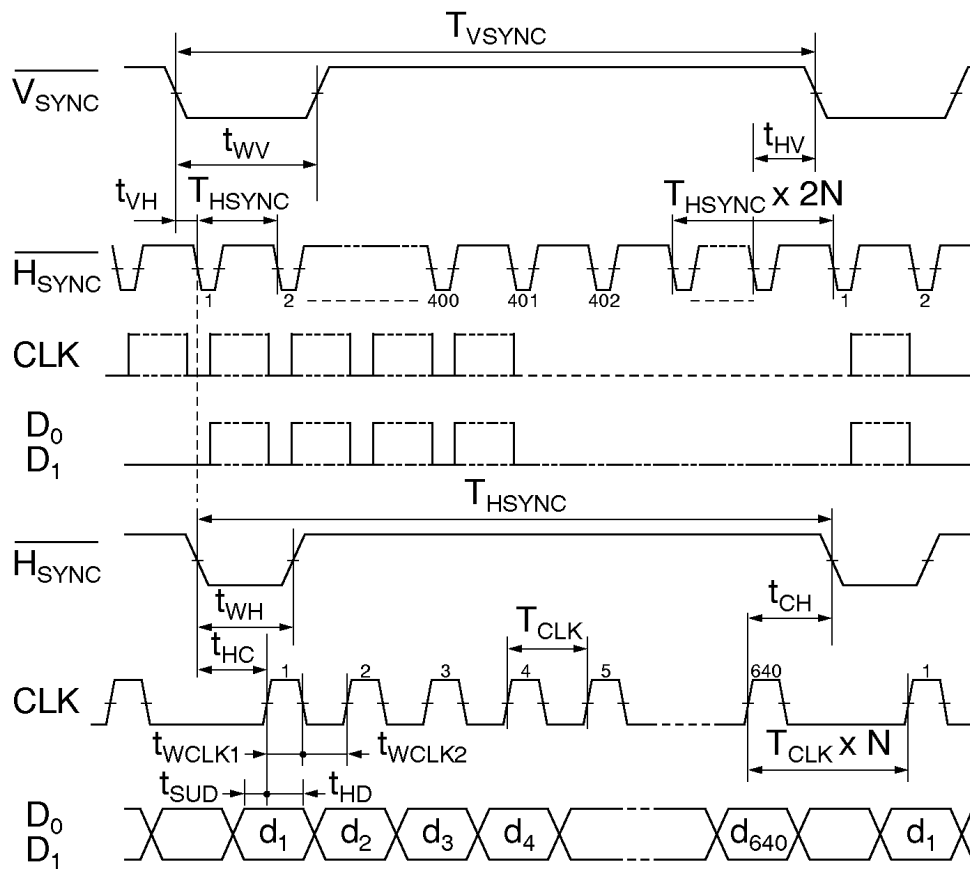

CONNECTOR PIN ASSIGNMENT**Signal Connector****FCN-605Q26-G/S (Fujitsu)**

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{F_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D	16	S.GND
17	N.C.	18	S.GND
19	CLK	20	S.GND
21	B.CONT	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Applicable connector:
FCN-607B026-G/D

Power Supply Connector**FCN-815P009-TA (Fujitsu)**

Pin No.	Signal
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *

Applicable connectors:
FCN-813J009-A housing (Fujitsu)
FCN-813J-T/A contact (Fujitsu)

* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

Graphic Units
(640 by 480 dots) — *At a Glance*


Device	Page
FPF8060HRUB-002	5-3
FPF8060HRUC-120	5-13
FPF8060HRUK	5-23
FPF8060HRUM	5-33
FPF8060HRUS-120	5-43

FPF8060HRUB-002


Plasma Display Graphics Unit

The FPF8060HRUB-022 plasma display unit consists of an AC gas discharge plasma display unit with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8060HRUB-022 a highly reliable display device.

- High resolution
- Bright, even, orange-on-black display
- No flicker or warp
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

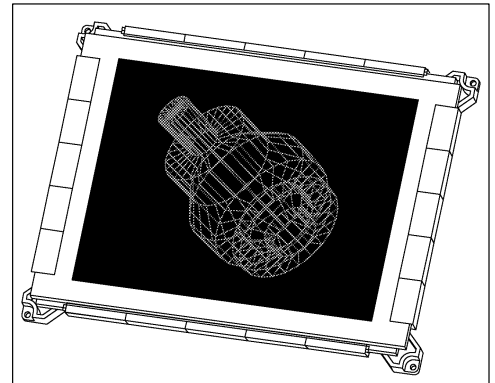

BLOCK DIAGRAM

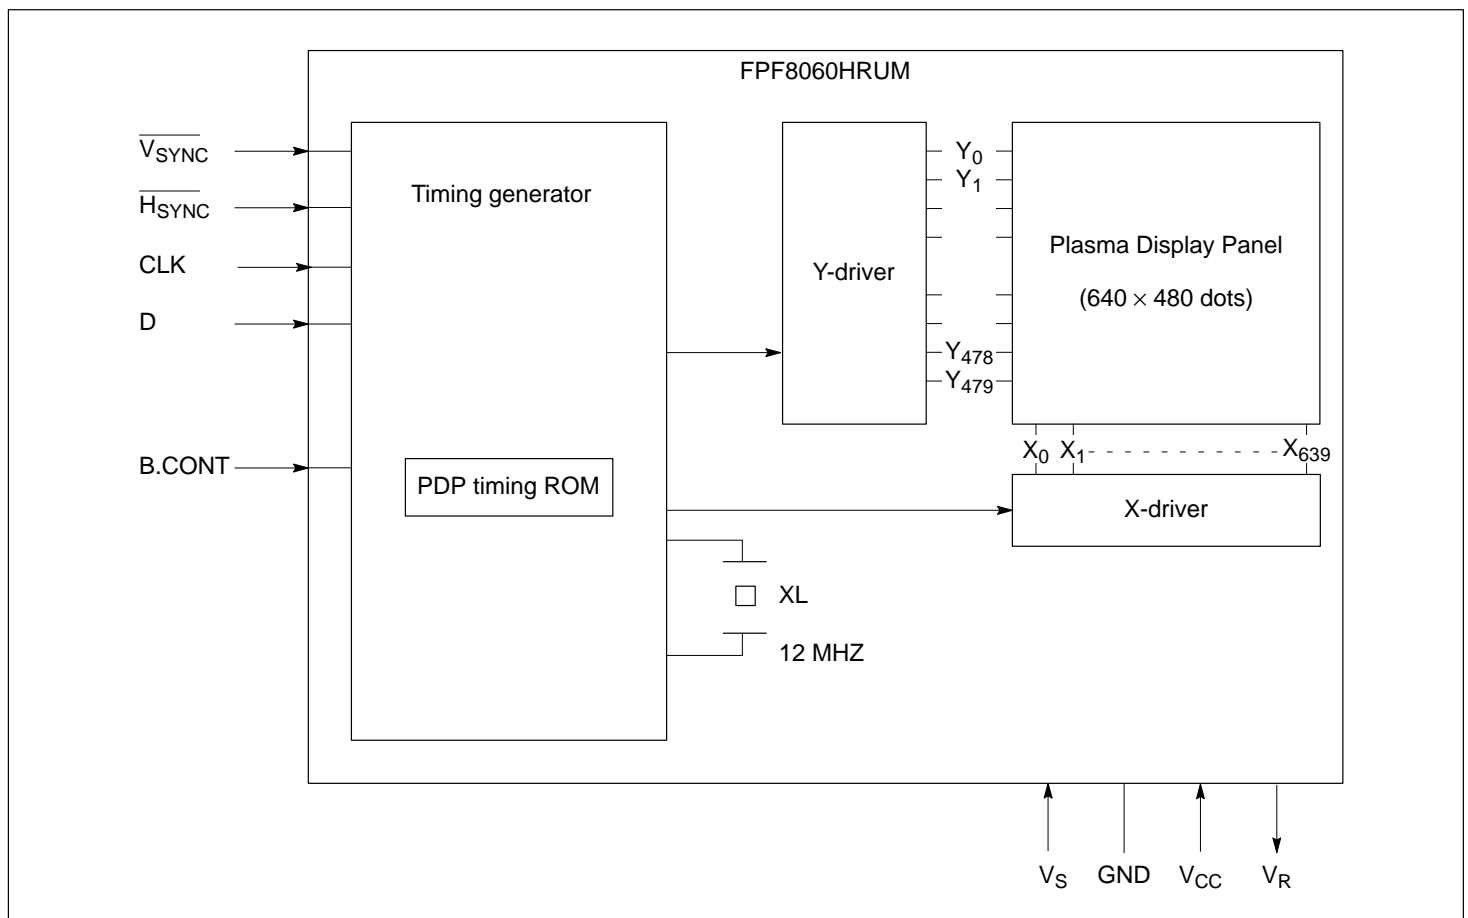

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			340	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.45	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.4	V
Signal input current for logic 0 ($V_{IL} = 2.75$ V)	I_{IL}			-16	mA

Note: The power source is required to be variable from 88 to 100.5V DC.


MECHANICAL SPECIFICATIONS

Physical Specifications

Item	Value
Number of display dots	640 × 480 dots (307,200 dots)
Dot pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	211 (H) × 158 (V) mm (8.307 × 6.220 in.)
Display color	Neon orange
Brightness	110 cd/m ²
Contrast ratio	20 : 1 min
Viewing angle	160° min
Weight	Approx. 1 kg
External dimensions	See External Dimensions


Performance Specifications

Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50°C
Operation humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70°C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

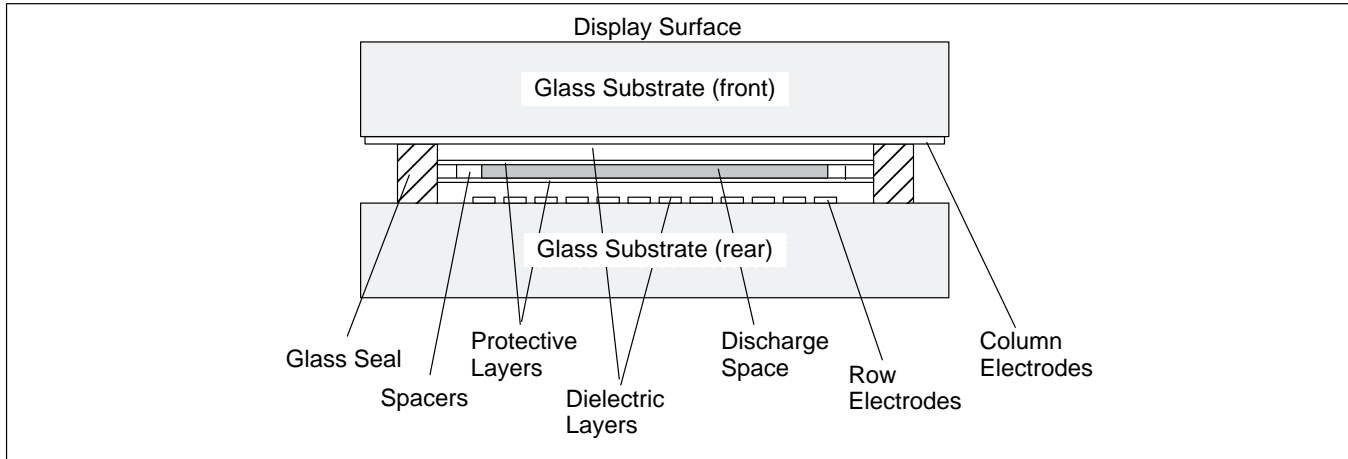Physical Construction and Operation

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

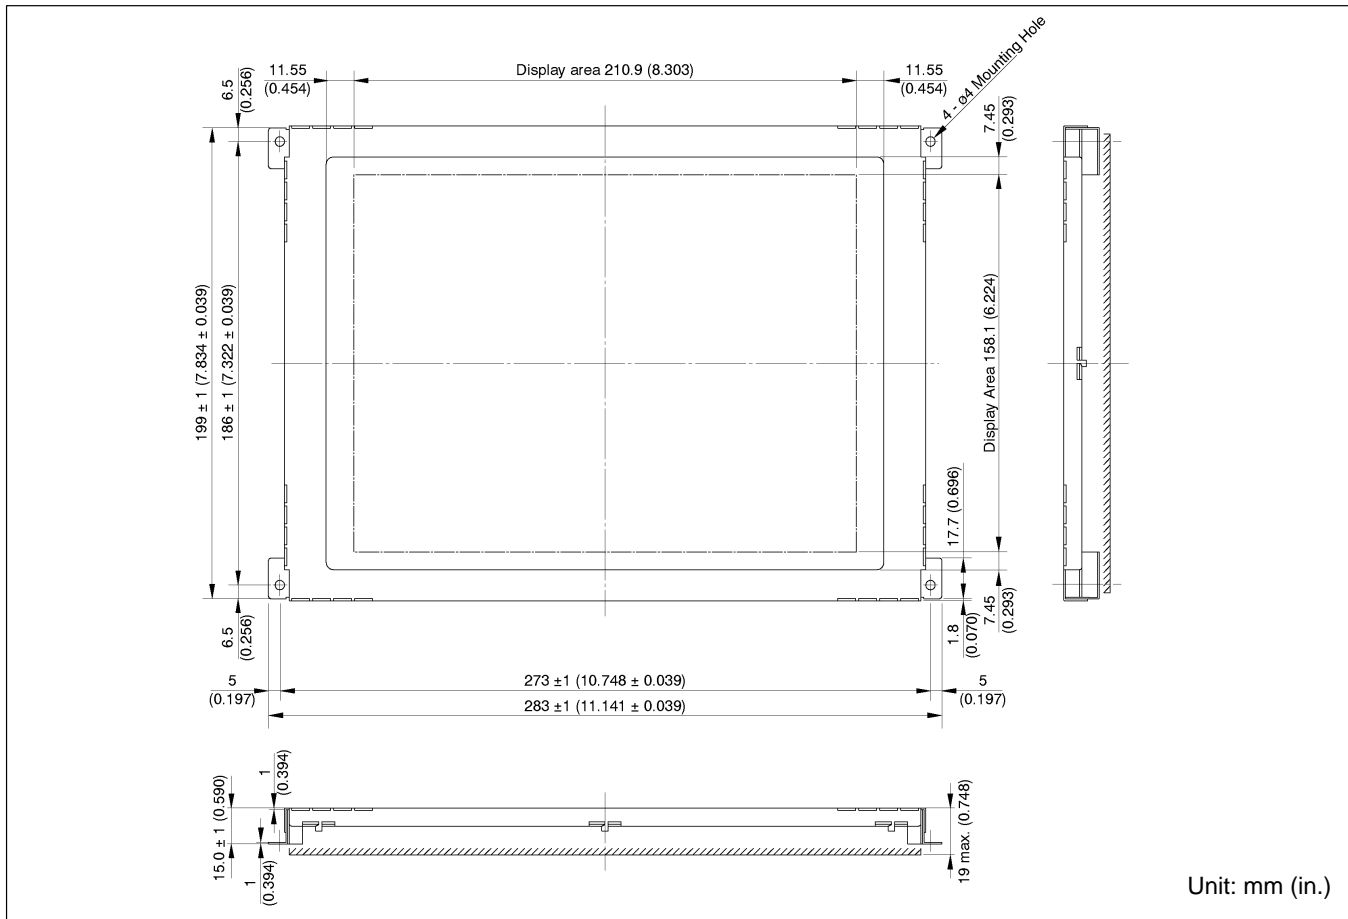


INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Logic	Definition and Function
Display data	D	Posi	Serial display data. Relation between display data and display dots is shown in the following figure.
Clock signal	CLK	Nega	The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 160.
Line synchronous	$\overline{H_{SYNC}}$	Nega	The number of $\overline{H_{SYNC}}$ signals in one cycle of $\overline{V_{SYNC}}$ must be 482 or more even numbers.
Frame synchronous	$\overline{V_{SYNC}}$	Nega	The input signal which controls the refresh speed of the screen.
Brightness control	B.CONT		The input signal which controls the screen brightness. Brightness is its maximum at logical "High" and 0% of maximum at logical "Low."

Relationship Between Display Data and Display Dots

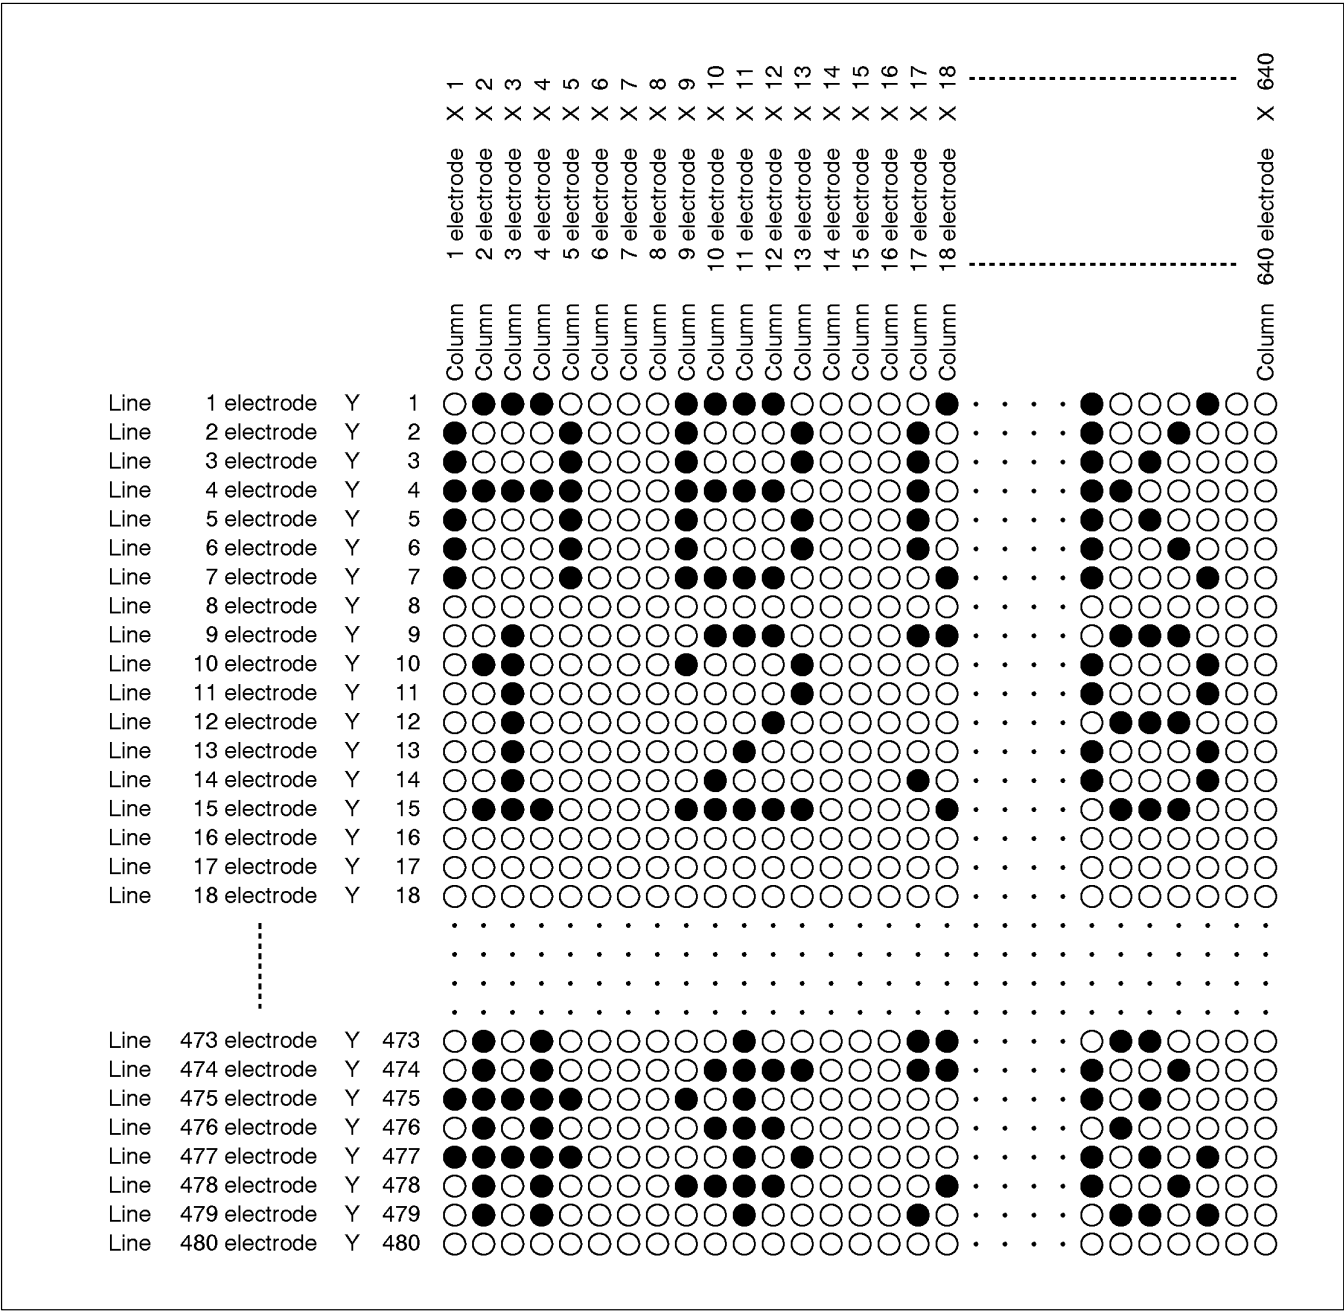


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	44.46	—	ms
t_{WV}^1	—	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}	88	90	92	μs
t_{WH}	2	6	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ $T_{WV} > T_{HSYNC}$.

²Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

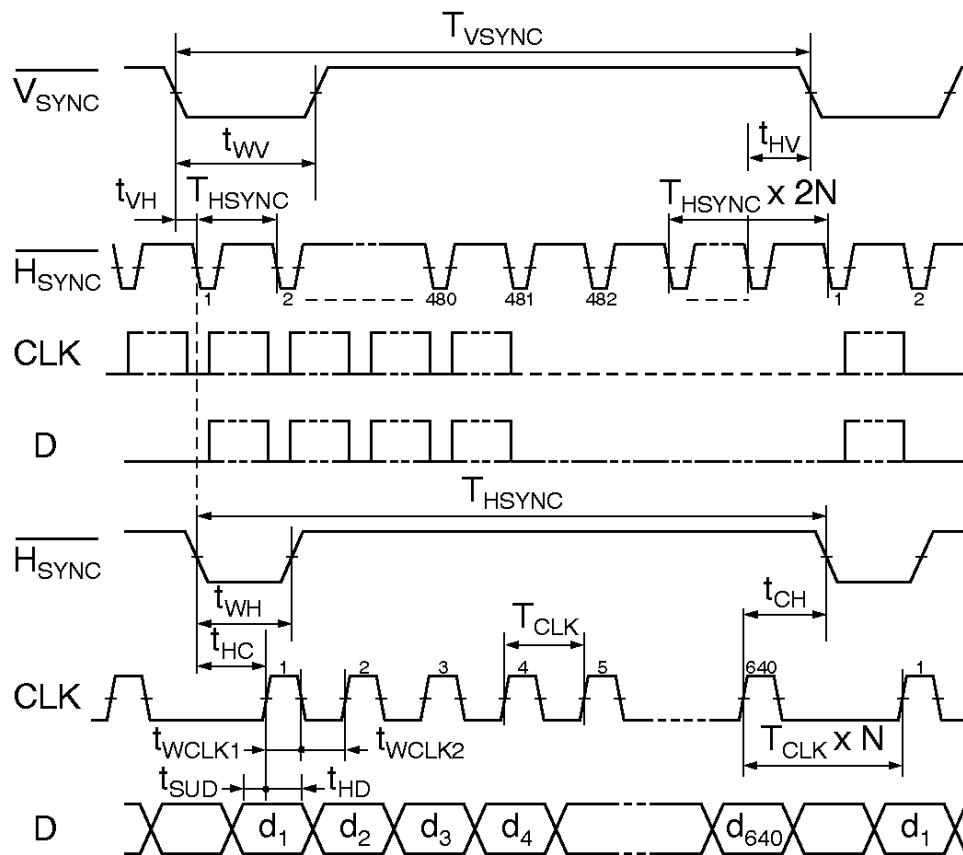

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q26-G/S (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{SYNC}}$	2	S.GND
3	$\overline{H_{SYNC}}$	4	S.GND
5	$\overline{D0}$	6	N.C.
7	$\overline{D1}$	8	N.C.
9	$\overline{D2}$	10	N.C.
11	$\overline{D3}$	12	N.C.
13	S.GND	14	S.GND
15	\overline{CKE}	16	S.GND
17	BCE	18	S.GND
19	S.GND	20	ENA

Applicable connector:
FCN-607B026-G/D

Power Supply Connector

FCN-815P009-TA (Fujitsu)

Pin No.	Signal
1	V_{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V_S
6	N.C.
7	N.C.
8	N.C.
9	V_R^*


Applicable connectors:
FCN-813J009-A housing (Fujitsu)
FCN-813J-T/A contact (Fujitsu)

* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

FPF8060HRUC-120


Plasma Display Graphics Unit

The FPF8060HRUC-120 plasma graphics display unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. Fujitsu's proprietary control method provides a clear display with a 4-level gray scale. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8060HRUC-120 a highly reliable display device. This display model is well-suited for touchscreen input applications with its ergonomic design.

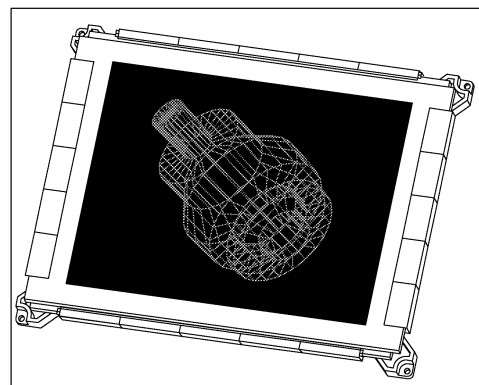

- Bright, even, orange-on-black display
- Four-level gray scale
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

BLOCK DIAGRAM

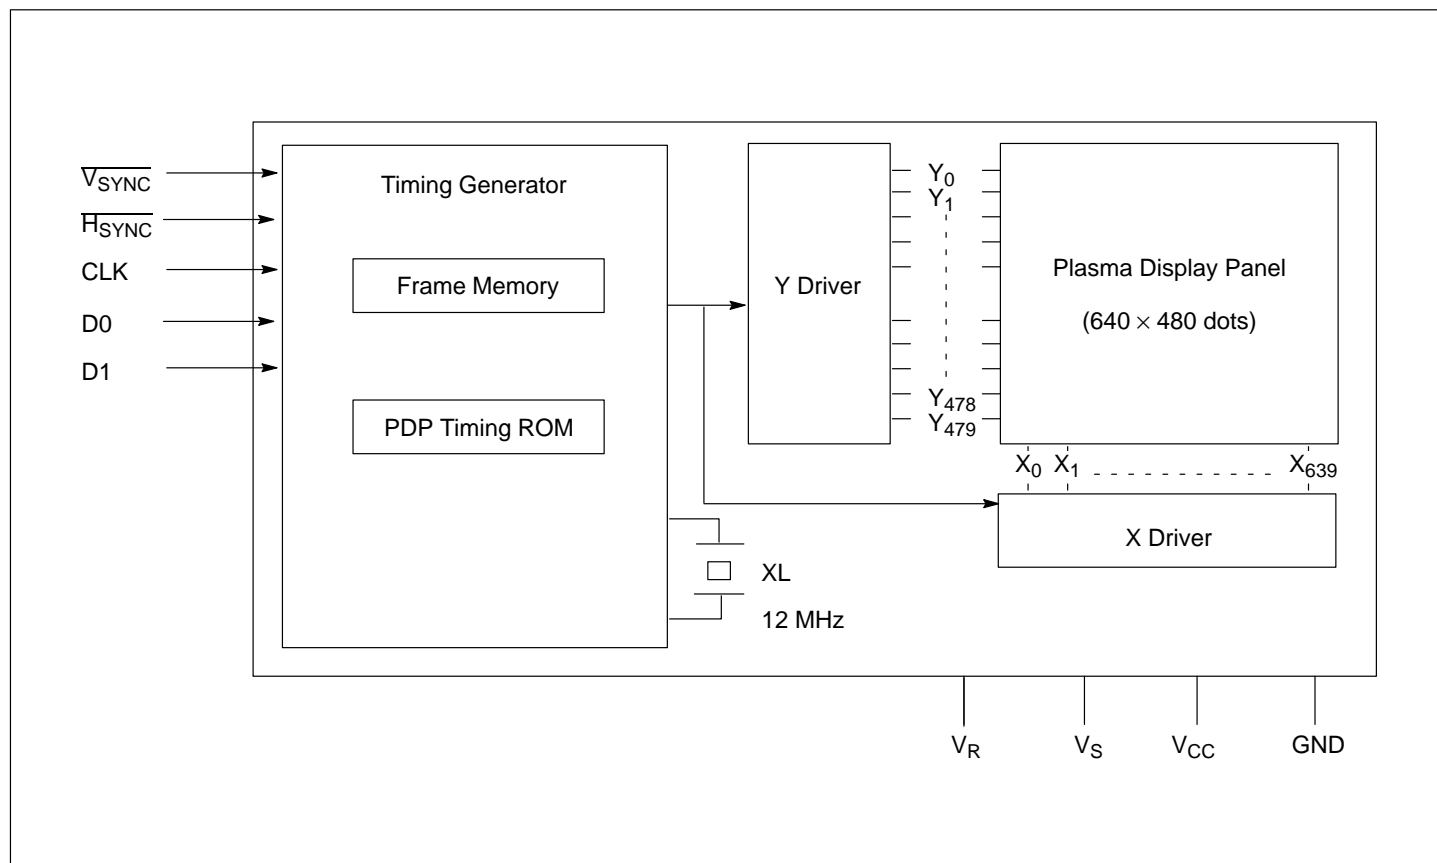

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Rating
Supply Voltage for Sustain	V_S	+130 V
Supply Voltage for Logic	V_{CC}	+7 V

DC Characteristics

	Item	Symbol	Min.	Typ.	Max.	Unit
For Display	Supply Voltage for Sustain ^{1,2}	V_S	88	95	100.5	V
	Ripple/Noise (mV _{PP})	V_{NRS}	—	—	500	mV
	Stability (Average)	—	—	—	±1.5	%
	Accuracy (Against V_S specified on label of unit)	—	—	—	±0.5	%
	Stability (moment)	—	—	—	-5	%
	Supply Current for Sustain ($V_S = 95$ V) ^{3,4}	I_S	50	200	340	mA
	Supply Current (moment)	I_{SP}	0.5	—	2	A
For Logic	Supply Voltage for Logic	V_{CC}	4.75	5.0	5.25	V
	Ripple/Noise (mV _{PP})	V_{NRC}	—	—	200	mV
	Stability	—	—	—	±5	%
	Supply Current for Logic ($V_{CC} = 5$ V)	I_{CC}	150	250	500	mA
	Signal Input Voltage (H-Level)	V_{IH}	2.0	—	5.25	V
	Signal Input Voltage (L-Level)	V_{IL}	-0.5	—	0.8	V
	Signal Input Current ($V_{IH} = 2.75$ V) ($V_{CC} = 5.25$ V)	I_{IH}	—	—	20	μA
	Signal Input Current ($V_{IL} = 0.4$ V) ($V_{CC} = 5.25$ V)	I_{IL}	—	—	-16	mA

Notes: ¹Power source is required to be variable from 88 to 100.5 VDC.

²Specified value of V_S is indicated on the back (component mounted side) of each unit. Supply voltage should be trimmed to this specified value.

³Current I_S (and brightness) depends on horizontal frequency (1/H). Above values of I_S are specified on condition of standard horizontal frequency (37 μs/H).

⁴For power supply design purposes, I_S (for display) becomes 0 mA, (no load) under the following conditions.

- i) V_{CC} is not applied
- ii) 2 frame periods after V_{CC} is applied (I_S is in operation after 3 frame synchronous pulses are applied)
- iii) $\overline{H_{SYNC}}$ is not applied
- iv) CLK is not applied

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of Display Dots	640 (H) × 480 (V) dots (307,200 dots)
Dot Pitch	0.36 (H) mm × 0.36 (V) mm
Dot Size	Approximately 0.2 mm (0.008 in.) dia.
Effective Screen Area	230.04 (H) mm × 172.44 (V) mm
Gray Scale	4 levels Approximately 100%, 67%, 33%, and 0%
Display Color	Neon orange
Dot Brightness (peak) (plane average)	110 cd/m ² (43.5 fL) at maximum brightness level (typ.) 15 cd/m ² (5.9 fL) (typ.)
Viewing Angle	160 degrees min.
Brightness Unevenness	30% max.
Weight	Approximately 1.0 kg
Contrast	20:1 min

Performance Specifications


Item	Value
Operating Temperature	0 to 50°C
Storage Temperature	-20 to 70°C
Humidity	20 to 85% RH (no condensation)
Atmospheric Pressure Durability	Operation: 700 to 1114 mb Non-operation: 340 to 1114 mb
Vibration Frequency: Acceleration: Time:	10 to 55 Hz 2 G (max.) Operation: 5 min. in X, Y, and Z direction Non-operation: 2 hours in X, Y, and Z direction
Shock Acceleration: Time:	40 G max. in X and Y direction 20 G max. in Z direction 11 ms max.

Physical Construction and Operation

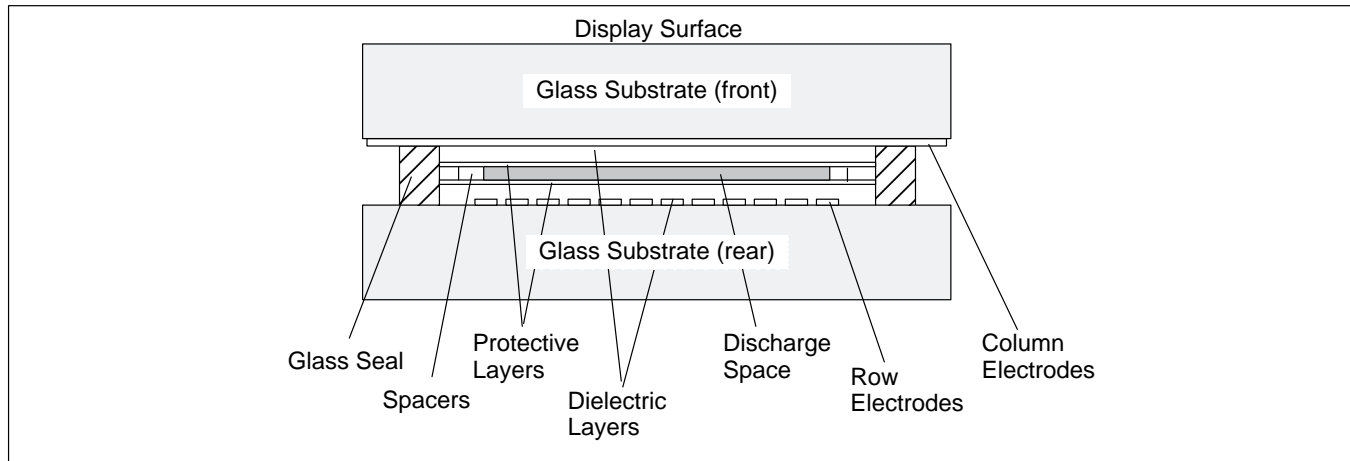

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

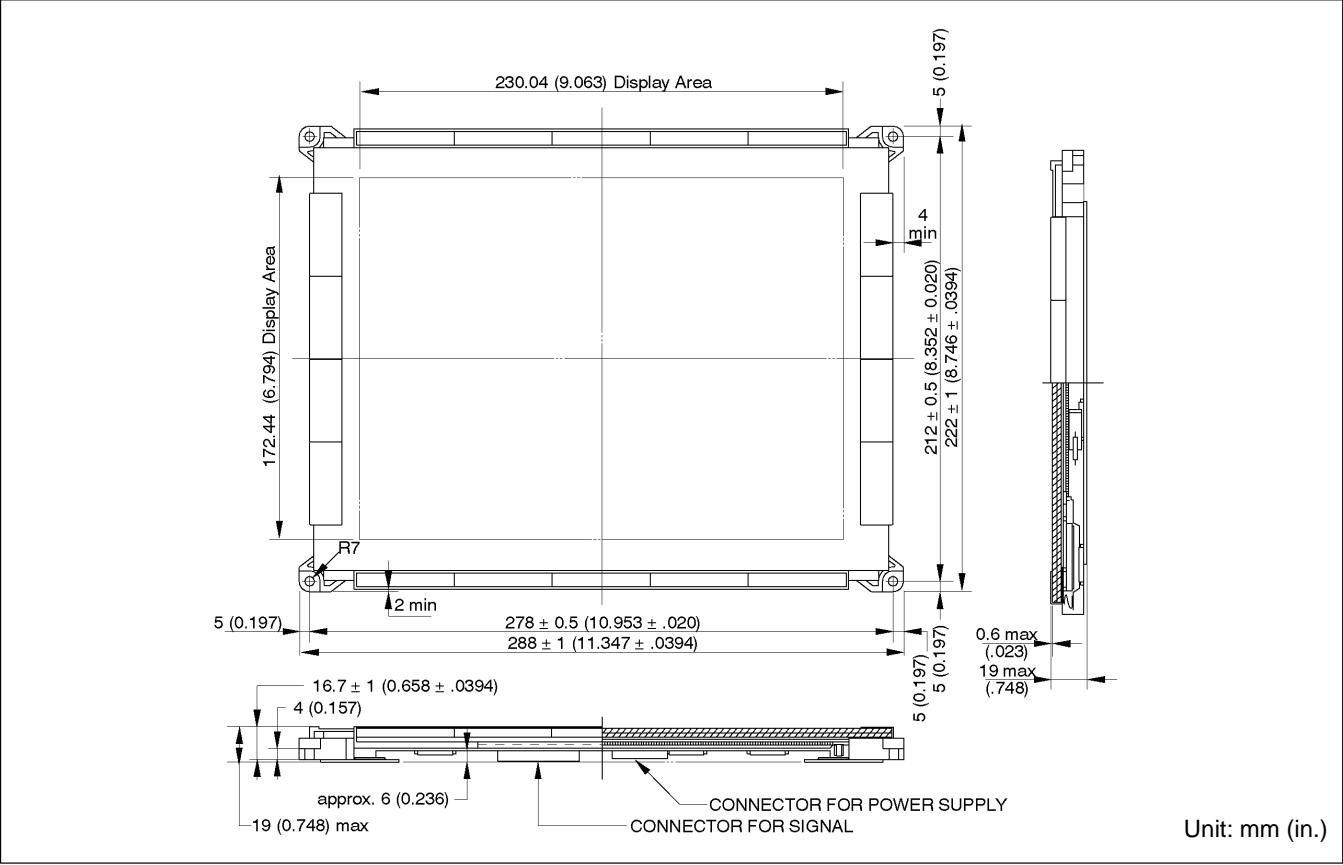


INTERFACE SIGNALS

Types of Signals (TTL Compatible)

Name of Signal	Symbol	Function															
Data Signal	D0 D1	<p>2 Bit Parallel Dot Data. The figure on the following page shows the relationship between display data and display dots.</p> <p>Relationship Between Data and Gray Scale Level</p> <table> <tr> <th>D1</th><th>D0</th><th>Gray Scale Level (Relative Brightness)</th></tr> <tr> <td>0</td><td>0</td><td>0%</td></tr> <tr> <td>0</td><td>1</td><td>low – 33%</td></tr> <tr> <td>1</td><td>0</td><td>medium – 67%</td></tr> <tr> <td>1</td><td>1</td><td>high – 100%</td></tr> </table>	D1	D0	Gray Scale Level (Relative Brightness)	0	0	0%	0	1	low – 33%	1	0	medium – 67%	1	1	high – 100%
D1	D0	Gray Scale Level (Relative Brightness)															
0	0	0%															
0	1	low – 33%															
1	0	medium – 67%															
1	1	high – 100%															
Clock Signal	CLK	<p>The input signal which controls the input timing of the display data. Dot data is read into the shift register at the rising edge of each signal.</p> <p>The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.</p>															
Line Synchronous Signal	$\overline{H_{SYNC}}$	<p>The input signal which controls the scanning timing of the line electrode. Y address increment to select the next line electrode is done at the falling edge of each signal.</p> <p>The number of $\overline{H_{SYNC}}$ signals during the period $\overline{V_{SYNC}}$ must be 482 or more even numbers.</p>															
Frame Synchronous Signal	$\overline{V_{SYNC}}$	<p>The input signal which controls the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the $\overline{V_{SYNC}}$ signal.</p>															

Relationship Between Display Data and Display Dots

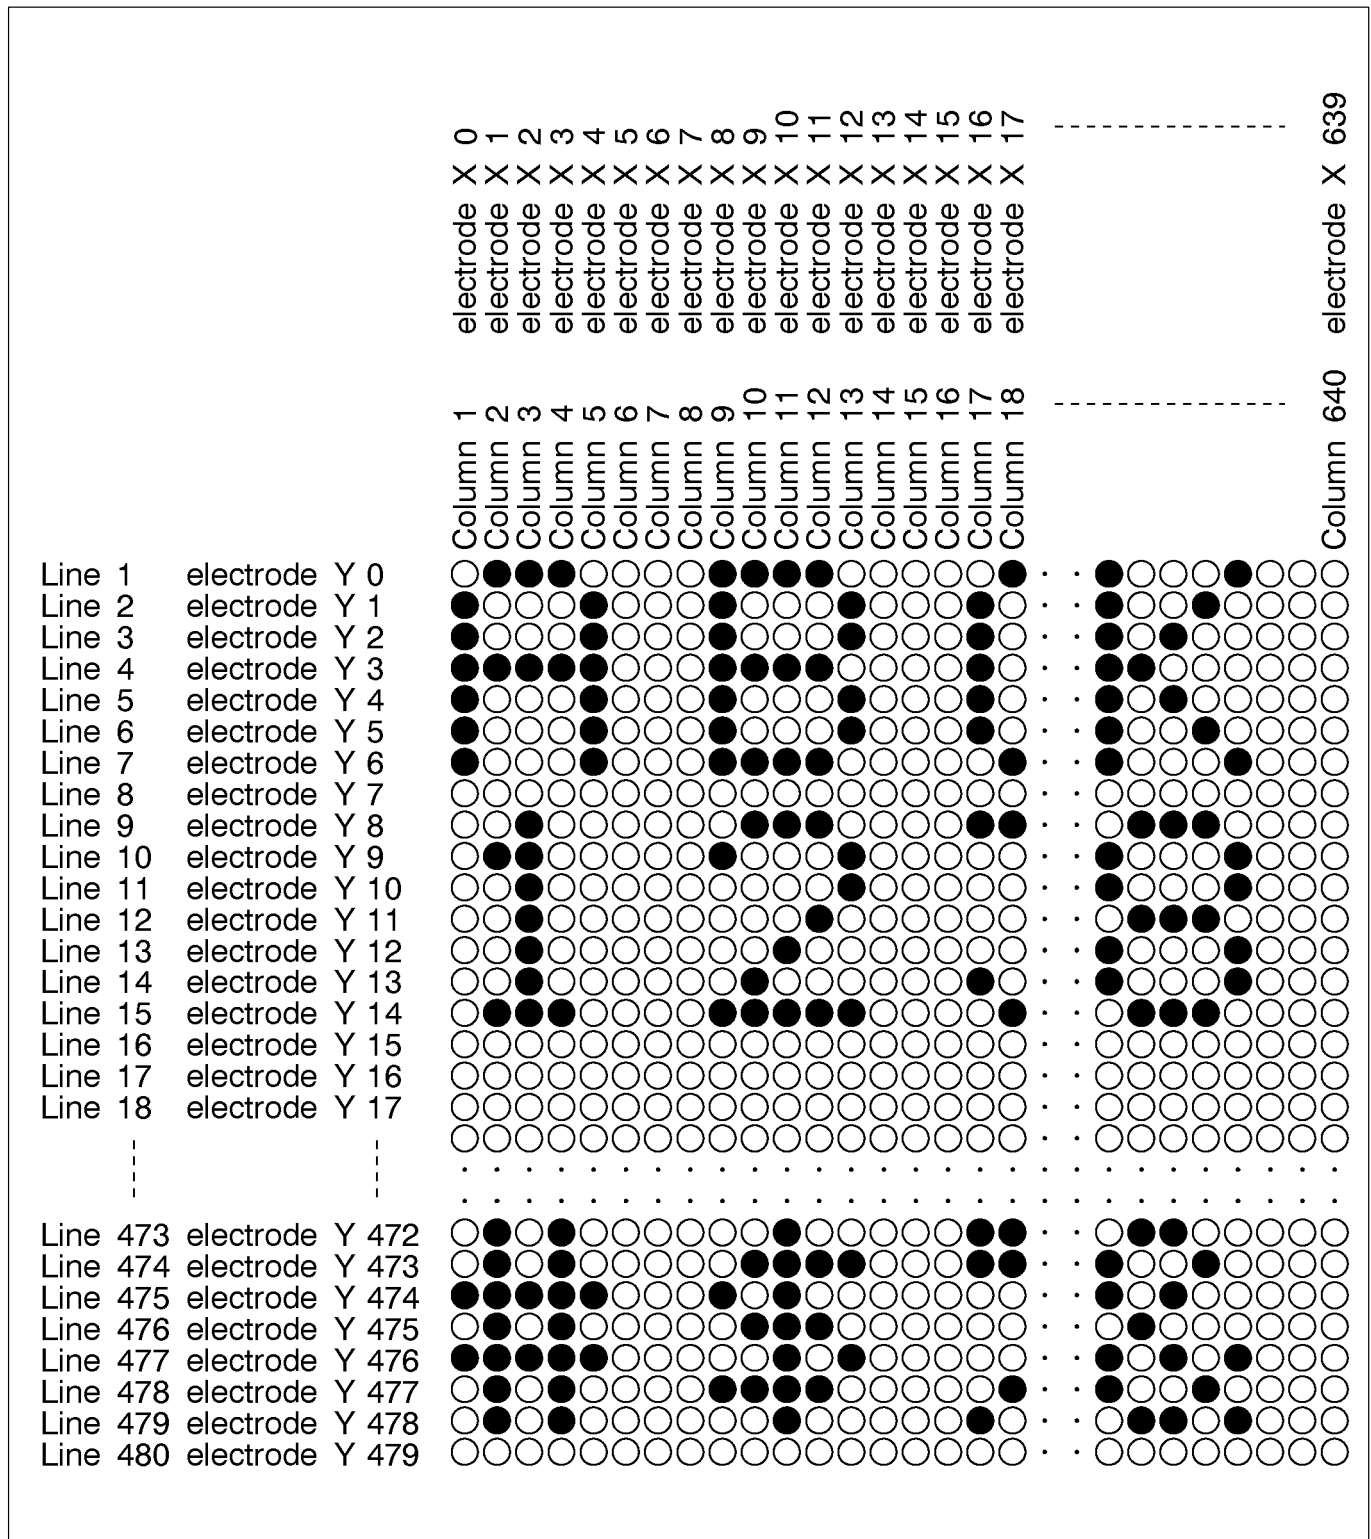


Interface Signal Timing Table

Symbol	Description	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	A Cycle of Vertical Synchronous Signal		16.7	20	ms	Frame Freq.: 60 Hz
t_{WV}^1	Pulse Width of Vertical Synchronous Signal	1	—	—	H	H: Horizontal Freq.
t_{VH}	Delay Time $\overline{V_{SYNC}} - \overline{H_{SYNC}}$	1			μs	
t_{HV}	Delay Time $\overline{H_{SYNC}} - \overline{V_{SYNC}}$	2			μs	
T_{Hsync}	A Cycle of Horizontal Synchronous Signal	31		36	μs	
t_{WH}	Pulse Width of Horizontal Synchronous Signal	2	5		μs	
t_{HC}	Delay Time $\overline{H_{SYNC}} - CLK$	1			μs	
t_{CH}	Delay Time $CLK - \overline{H_{SYNC}}$	1	3		μs	
T_{CLK}	A Cycle of Clock Signal	35			ns	
t_{WCLK1}^2	Pulse Width of Clock Signal (H)	17			ns	
t_{WCLK2}^2	Pulse Width of Clock Signal (L)	17			ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{SUD}	Set Up Time for Data	15			ns	
t_{HD}	Hold Time for Data	15			ns	


Notes: ¹ $t_{WC} > T_{Hsync}$

²Recommended ratio between t_{WCLK1} and t_{WCLK2} : 1:1

Interface Circuit

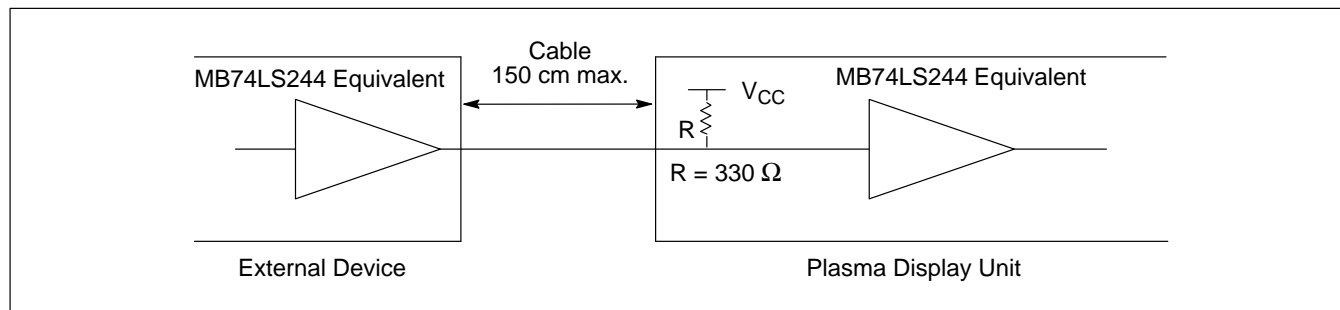

Interface Signal Timing Chart

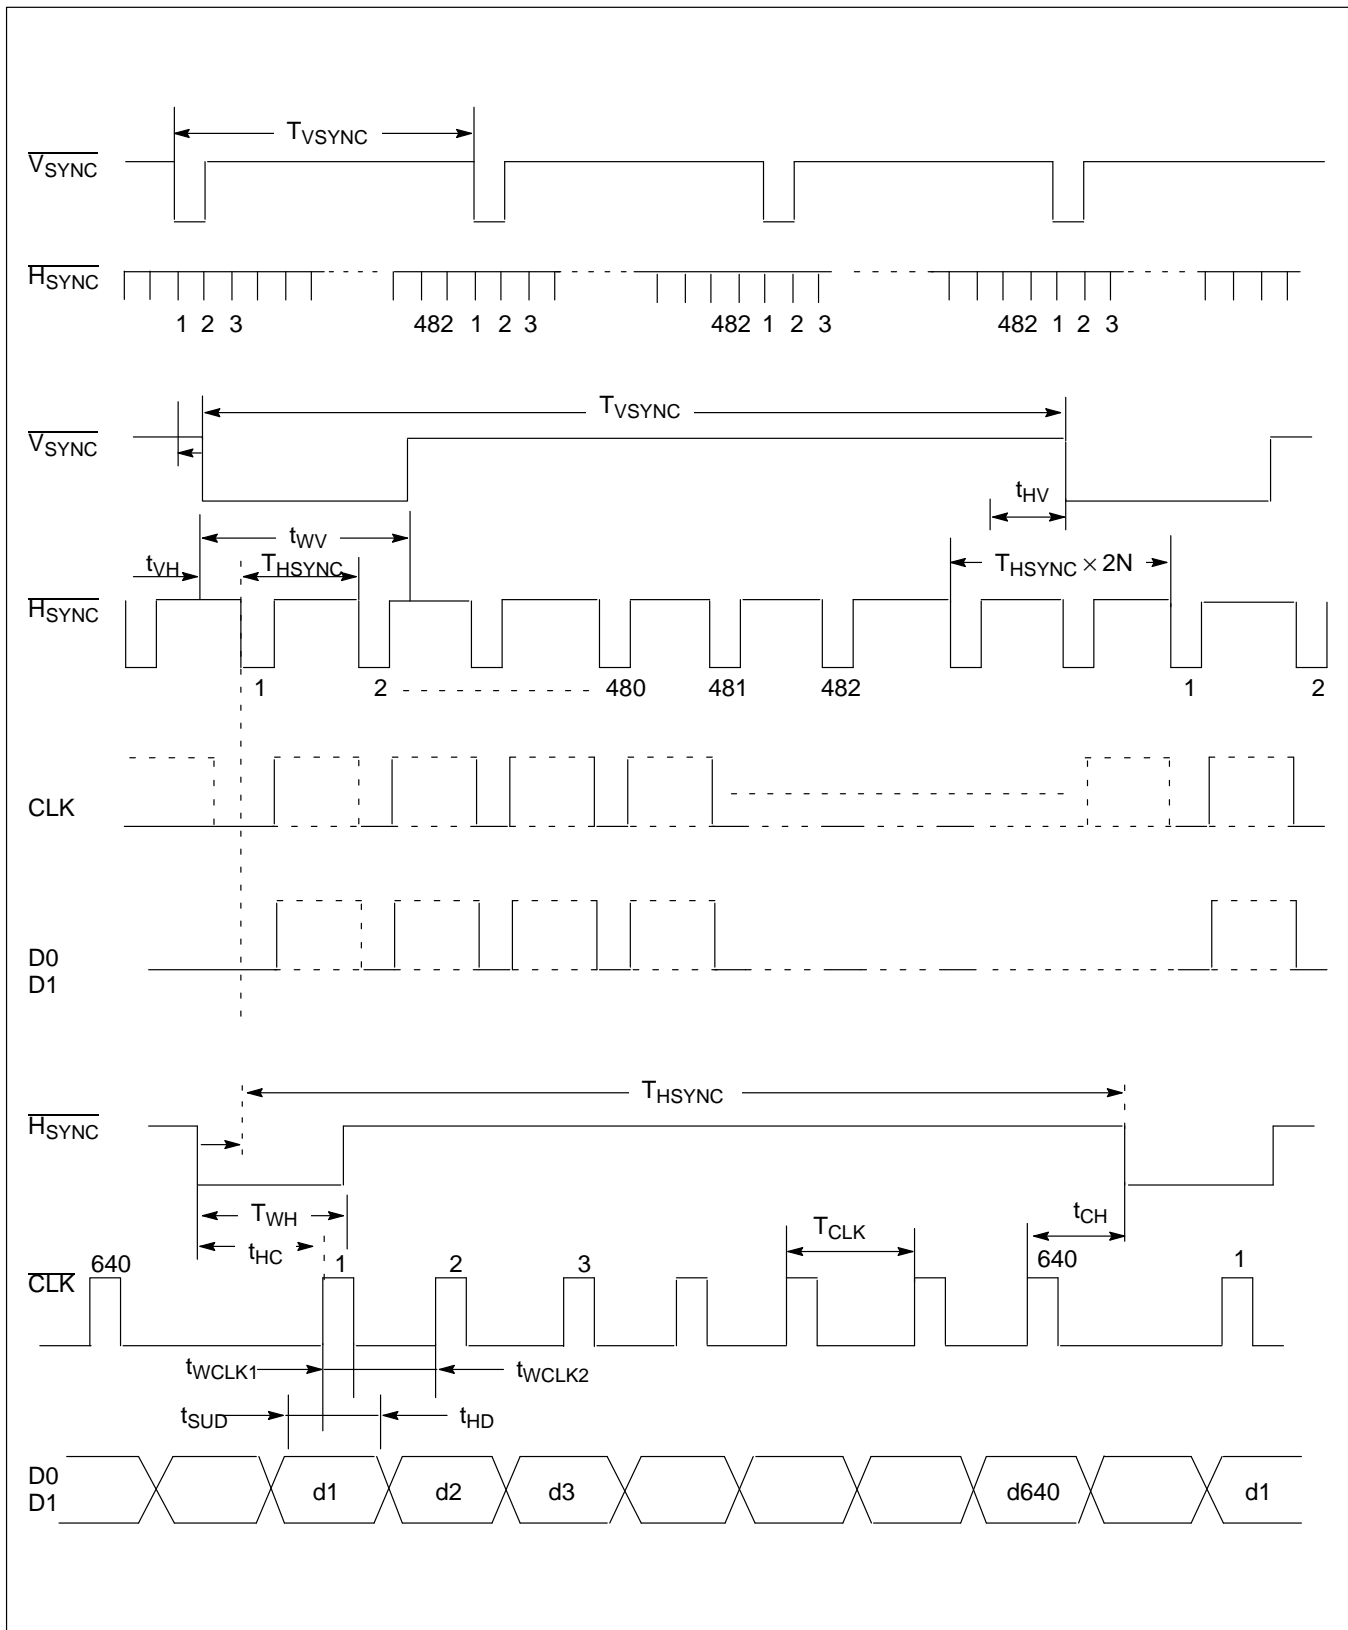

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q026-G/S

Pin No.	Symbol	Pin No.	Symbol
1	$\overline{V_{\text{SYNC}}}$	2	S. GND
3	$\overline{H_{\text{SYNC}}}$	4	S. GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S. GND
15	D0	16	S. GND
17	D1	18	S. GND
19	CLK	20	S. GND
21	N.C.	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Notes: Applicable Connector: FCN-607B 026-G/D

N.C. means "No Connection."

Power Supply Connector

FCN-815P-009TA

Pin No.	Symbol
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	GND (H)
9	V _R *

Notes: Applicable Connectors:
 FCN-813J009-A, Housing
 FCN-813J-T/Q, Contact for Manual Use
 FCN-813J-T/R, Contact for Automatic Use


* This PDP unit outputs the voltage V_R from 0 to 2.5 VDC through the ninth terminal of power supply connector.

FPF8060HRUK


Plasma Display Graphics Unit

The FPF8060HRUK plasma display unit consists of an AC gas discharge plasma display unit with bistable memory and associated driver circuitry. Fujitsu's proprietary control method provides a clear display with a four-level gray scale. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8060HRUK a highly reliable display device.

- Four-level gray scale
- High resolution
- Bright, even, orange-on-black display
- No flicker or warp
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

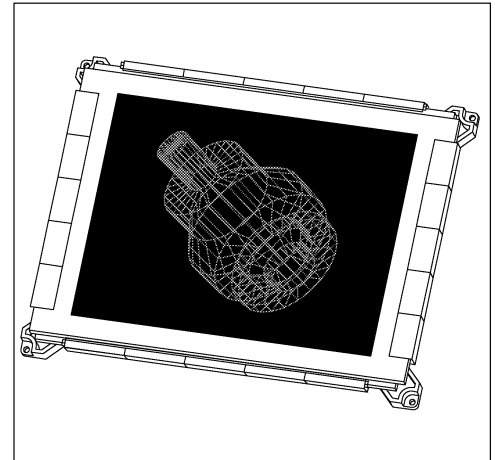

BLOCK DIAGRAM

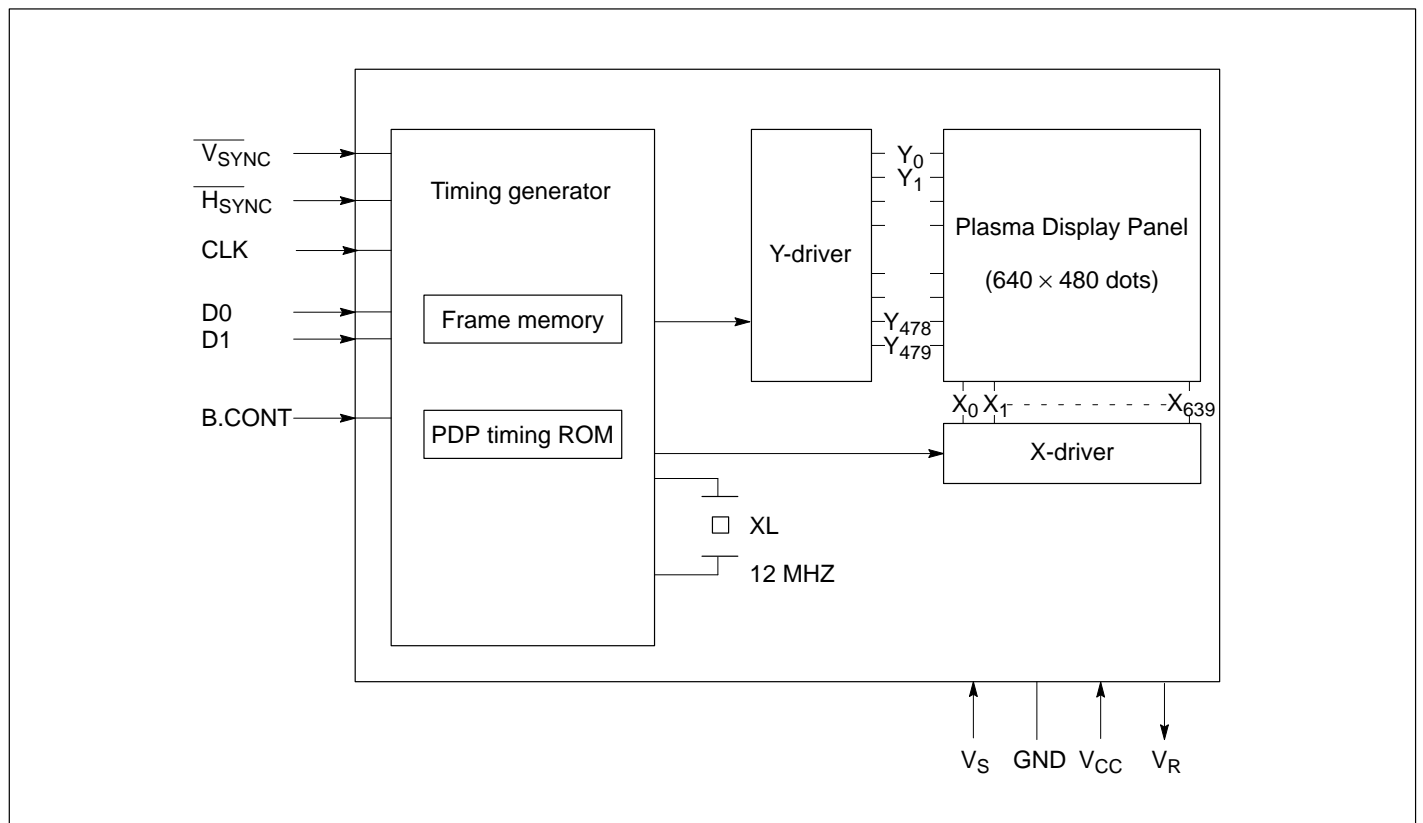

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			340	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.45	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.4	V
Signal input current for logic 0 ($V_{IL} = 2.75$ V)	I_{IL}			-16	mA

Note: * The power source is required to be variable from 88 to 100.5V DC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of display dots	640 × 480 dots (307,200 dots)
Dot pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	211 (H) × 158 (V) mm (8.307 × 6.220 in.)
Display color	Neon orange
Gray scale	4-level (Approx. 100%, 67%, 33%, 0%)
Brightness	110 cd/m ²
Contrast ratio	20 : 1 min
Viewing angle	160° min
Weight	Approx. 1 kg
External dimensions	See External Dimensions

Performance Specifications

Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50°C
Operation humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70°C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

Physical Construction and Operation

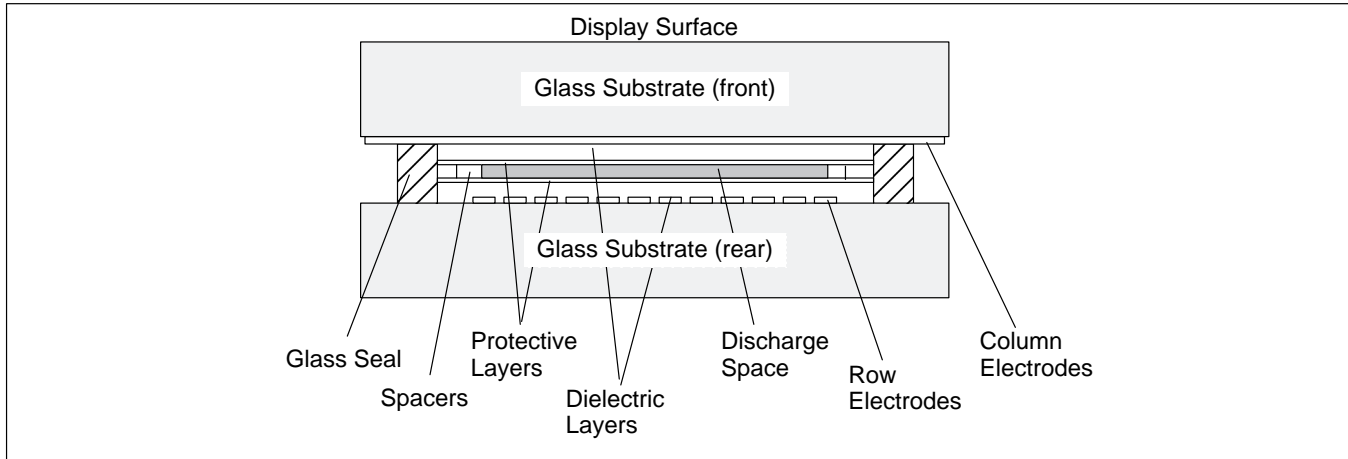


The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Logic	Definition and Function																								
Display data	D0 D1	Posi	<p>2-bit display data. Relation between Data and Gray scale level is shown below.</p> <table border="1"> <thead> <tr> <th colspan="4">Relationship Between Data and Gray Scale Level</th></tr> <tr> <th>D1</th><th>D0</th><th>Gray scale level</th><th>(Relative brightness)</th></tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td></td><td>(0)</td></tr> <tr> <td>0</td><td>1</td><td>Low</td><td>(33%)</td></tr> <tr> <td>1</td><td>0</td><td>Medium</td><td>(67%)</td></tr> <tr> <td>1</td><td>1</td><td>High</td><td>(100%)</td></tr> </tbody> </table>	Relationship Between Data and Gray Scale Level				D1	D0	Gray scale level	(Relative brightness)	0	0		(0)	0	1	Low	(33%)	1	0	Medium	(67%)	1	1	High	(100%)
Relationship Between Data and Gray Scale Level																											
D1	D0	Gray scale level	(Relative brightness)																								
0	0		(0)																								
0	1	Low	(33%)																								
1	0	Medium	(67%)																								
1	1	High	(100%)																								
Clock signal	CLK	Posi	The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.																								
Line synchronous	$\overline{H_{SYNC}}$	Nega	The number of $\overline{H_{SYNC}}$ signals in one cycle of $\overline{V_{SYNC}}$ must be 482 or more even numbers.																								
Frame synchronous	$\overline{V_{SYNC}}$	Nega	The input signal controls the refresh speed of the screen.																								
Brightness control	B.CONT		The input signal which controls the screen brightness. Brightness is its maximum at logical "High" and 0% of maximum at logical "Low."																								

Relationship Between Display Data and Display Dots

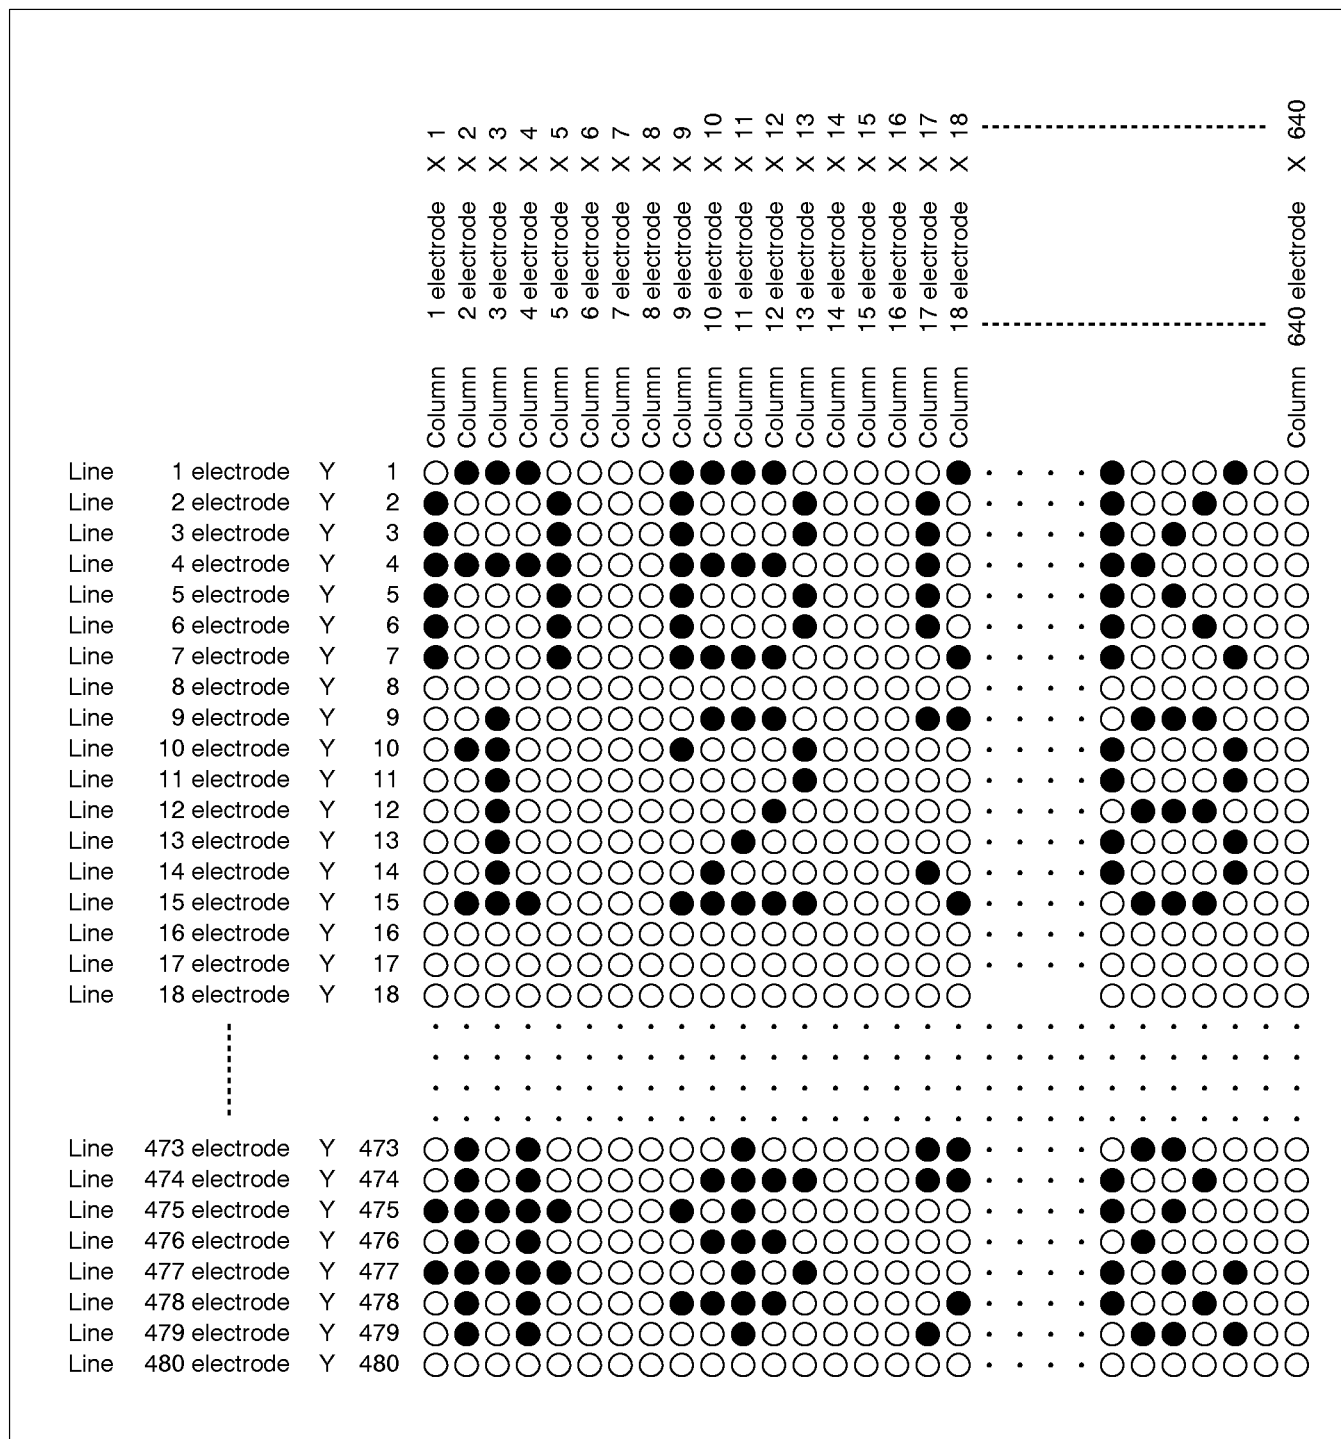


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	16.7	20	ms
t_{WV}^1	—	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}	35	37	45	μs
t_{WH}	2	5	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ $T_{WV} > T_{HSYNC}$

² Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

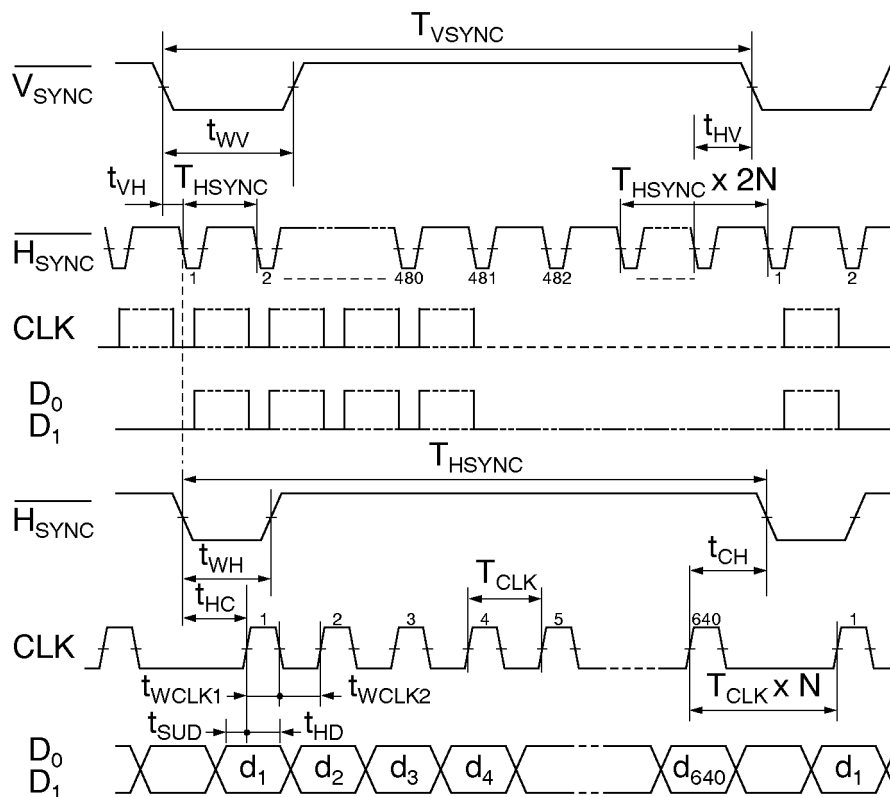

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q26-G/S (Fujitsu)

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{H_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D0	16	S.GND
17	D1	18	S.GND
19	CLK	20	S.GND
21	B.CONT	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Applicable connector:
FCN-607B026-G/D

Power Supply Connector

FCN-815P009-TA (Fujitsu)

Pin No.	Signal
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *

Applicable connectors:
FCN-813J009-A housing
FCN-813J-T/A contact


* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

FPF8060HRUM


Plasma Display Graphics Unit

The FPF8060HRUM plasma display unit consists of an AC gas discharge plasma display unit with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF8060HRUM a highly reliable display device.

- High resolution
- Bright, even, orange-on-black display
- No flicker or warp
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

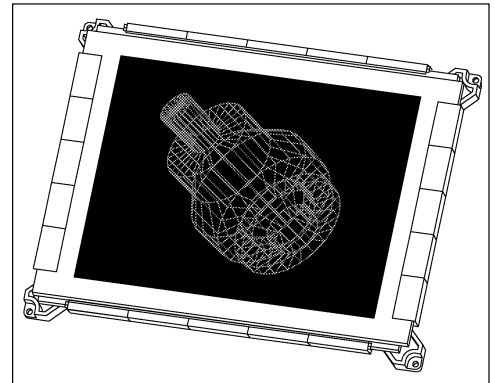

BLOCK DIAGRAM

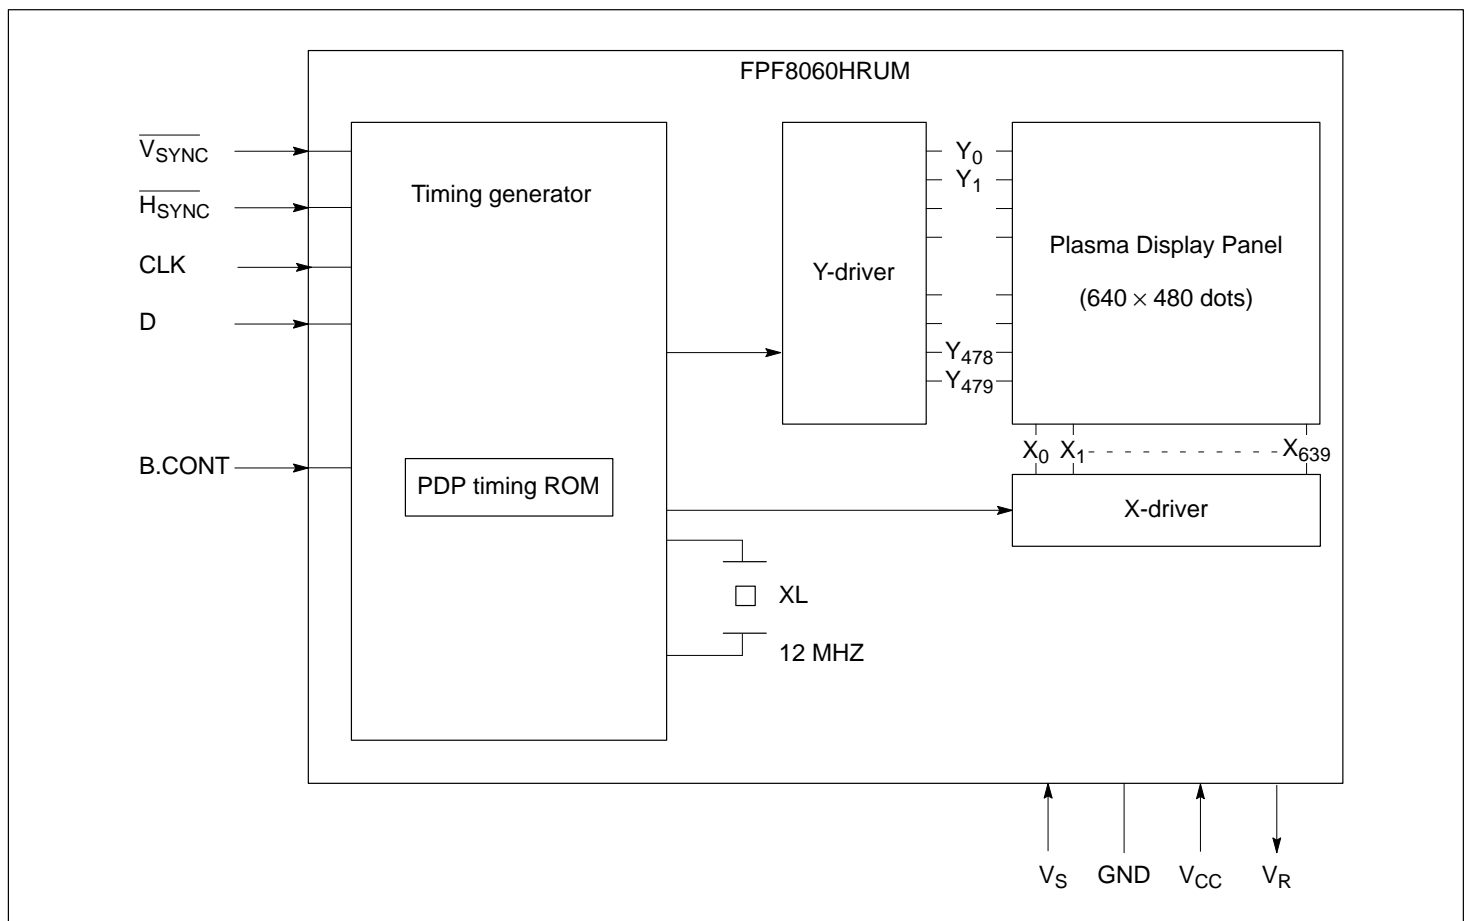

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Sustain voltage	V_S	120 V
Logic voltage	V_{CC}	7 V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage for sustain*	V_S	88	95	100.5	V
Supply current for sustain ($V_S = 95$ V)	I_S			340	mA
Supply voltage for logic	V_{CC}		5		V
Supply current for logic ($V_{CC} = 5$ V)	I_{CC}	0.15		0.45	A
Signal input voltage for logic 1	V_{IH}	2.0		5.25	V
Signal input current for logic 1 ($V_{IH} = 2.75$)	I_{IH}			20	μ A
Signal input voltage for logic 0	V_{IL}	-0.5		0.4	V
Signal input current for logic 0 ($V_{IL} = 2.75$ V)	I_{IL}			-16	mA

Note: The power source is required to be variable from 88 to 100.5V DC.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of display dots	640 × 480 dots (307,200 dots)
Dot pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot size	0.2 mm (0.008 in.) dia
Effective display area	211 (H) × 158 (V) mm (8.307 × 6.220 in.)
Display color	Neon orange
Brightness	110 cd/m ²
Contrast ratio	20 : 1 min
Viewing angle	160° min
Weight	Approx. 1 kg
External dimensions	See External Dimensions

Performance Specifications


Item	Symbol	Value
Operating temperature	T _{OP}	0 to +50°C
Operation humidity	RH _{OP}	20 to 85%
Storage temperature	T _{STG}	−20 to +70°C
Storage humidity	RH _{STG}	20 to 85%
Vibration	V	2 G
Shock	S	40 G
Pressure (non-operating)		340 to 1114 hPa

Physical Construction and Operation

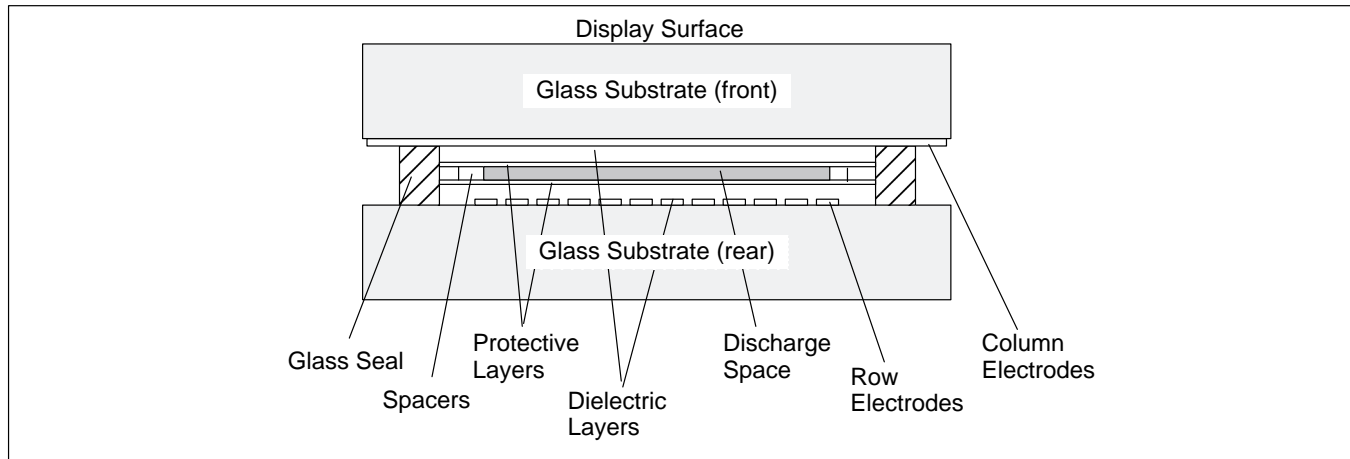

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

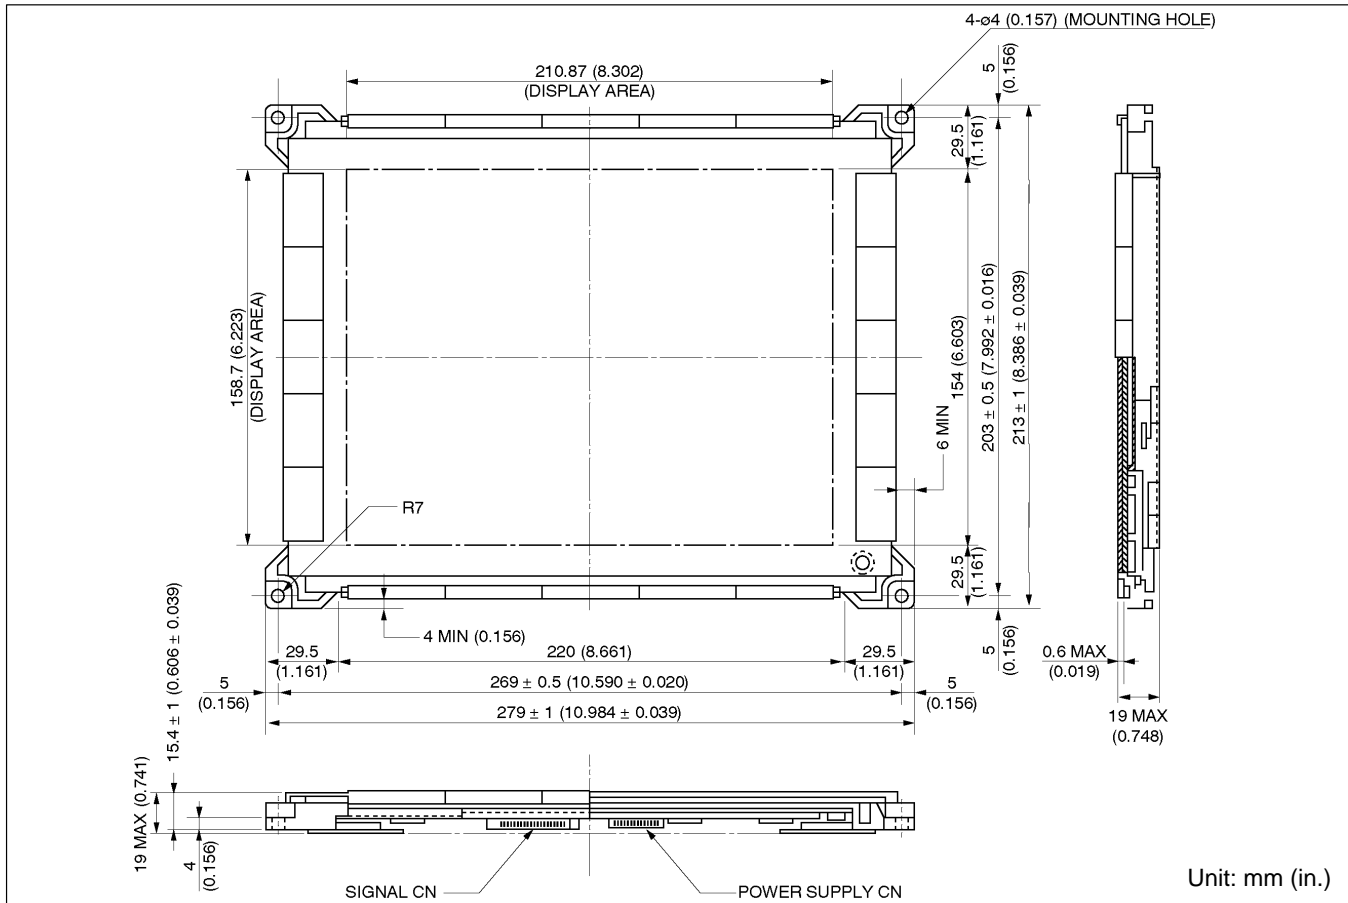

INTERFACE SIGNALS**Type of Signals (TTL Compatible)**

Signal	Symbol	Logic	Definition and Function
Display data	D	Posi	Serial display data. Relation between display data and display dots is shown in the following figure.
Clock signal	CLK	Posi	The number of clock signals in one cycle of $\overline{H_{SYNC}}$ must be 640.
Line synchronous	$\overline{H_{SYNC}}$	Nega	The number of $\overline{H_{SYNC}}$ signals in one cycle of $\overline{V_{SYNC}}$ must be 482 or more even numbers.
Frame synchronous	$\overline{V_{SYNC}}$	Nega	The input signal which controls the refresh speed of the screen.
Brightness control	B.CONT		The input signal which controls the screen brightness. Brightness is its maximum at logical "High" and 0% of maximum at logical "Low."

Relationship Between Display Data and Display Dots

				X 1	X 2	X 3	X 4	X 5	X 6	X 7	X 8	X 9	X 10	X 11	X 12	X 13	X 14	X 15	X 16	X 17	X 18	X 640											
				1 electrode	2 electrode	3 electrode	4 electrode	5 electrode	6 electrode	7 electrode	8 electrode	9 electrode	10 electrode	11 electrode	12 electrode	13 electrode	14 electrode	15 electrode	16 electrode	17 electrode	18 electrode	640 electrode											
				Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column	Column											
Line	1 electrode	Y	1	○	●	●	●	○	○	○	○	○	●	●	●	●	○	○	○	○	○	●	·	·	·	·	●	○	○	○	○	○	○	
Line	2 electrode	Y	2	●	○	○	○	●	○	○	○	○	●	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	3 electrode	Y	3	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	4 electrode	Y	4	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	5 electrode	Y	5	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	6 electrode	Y	6	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	7 electrode	Y	7	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	●	○	○	○	○	○	○	
Line	8 electrode	Y	8	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	9 electrode	Y	9	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	10 electrode	Y	10	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	11 electrode	Y	11	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	12 electrode	Y	12	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	13 electrode	Y	13	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	14 electrode	Y	14	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	15 electrode	Y	15	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	16 electrode	Y	16	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	17 electrode	Y	17	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	18 electrode	Y	18	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
				·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	
				·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·	·
Line	473 electrode	Y	473	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	474 electrode	Y	474	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	475 electrode	Y	475	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	476 electrode	Y	476	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	477 electrode	Y	477	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	478 electrode	Y	478	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	479 electrode	Y	479	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	
Line	480 electrode	Y	480	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	·	·	·	·	○	○	○	○	○	○	○	


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit
T_{VSYNC}	—	44.46	—	ms
t_{WV}^1	—	—	—	μs
t_{VH}	1	—	—	μs
t_{HV}	2	—	—	μs
T_{HSYNC}	88	90	92	μs
t_{WH}	2	6	—	μs
t_{HC}	2	—	—	μs
t_{CH}	2	3	—	μs
T_{CLK}	44	—	—	ns
$t_{WCLK1,2}^2$	22	—	—	ns
t_{SUD}	22	—	—	ns
t_{HD}	22	—	—	ns

Notes: ¹ $T_{WV} > T_{HSYNC}$.

²Recommended ratio between t_{WCLK1} and t_{WCLK2} is 1 : 1.

Interface Signal Timing Chart

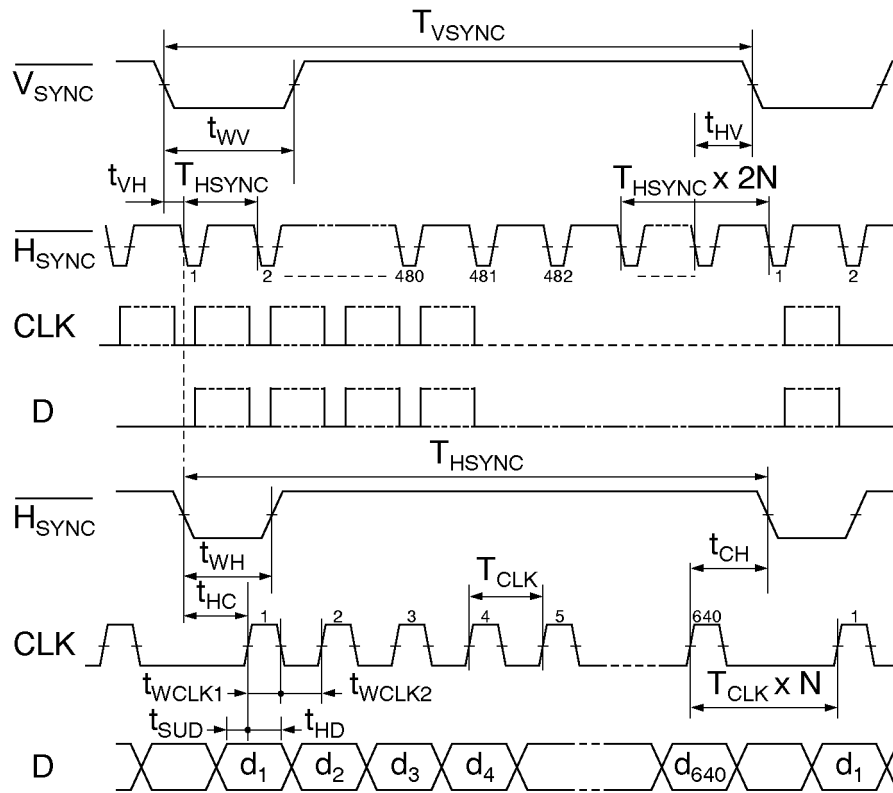

CONNECTOR PIN ASSIGNMENT**Signal Connector****FCN-605Q26-G/S (Fujitsu)**

Pin No.	Signal	Pin No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S.GND
3	$\overline{F_{\text{SYNC}}}$	4	S.GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S.GND
15	D	16	S.GND
17	N.C.	18	S.GND
19	CLK	20	S.GND
21	B.CONT	22	N.C.
23	N.C.	24	N.C.
25	V _{CC}	26	V _{CC}

Applicable connector:
FCN-607B026-G/D

Power Supply Connector**FCN-815P009-TA (Fujitsu)**

Pin No.	Signal
1	V _{CC}
2	GND (L)
3	N.C.
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	N.C.
9	V _R *


Applicable connectors:
FCN-813J009-A housing (Fujitsu)
FCN-813J-T/A contact (Fujitsu)

* This terminal is connected only when
FPF07P-AC100 power supply unit is used.

FPF8060HRUS-120


AC Memory Plasma Display Unit

The FPF8060HRUS-120 plasma display unit is a thin, flat display device that uses gas discharge luminescence. The display is clear and easy to read, has a long life, and is highly reliable. The FPF8060HRUS-120 consists of an AC gas discharge plasma display panel with bistable memory function and driver circuitry. The low-profile FPF8060HRUS-120 display is ideal for fast, cost-efficient, easy design where space is at a premium, in applications such as portable computers, medical instrumentation, or factory automation.

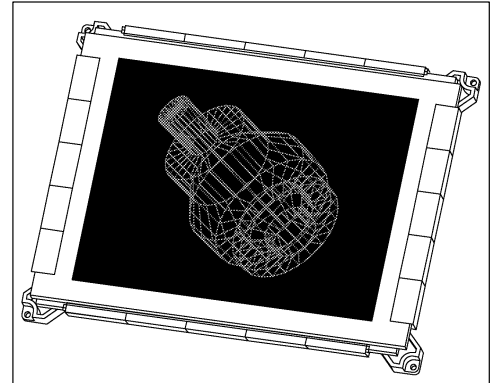

- Bright, even, orange-on-black display
- Sixteen-level gray scale
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability
- Capable of interfacing with standard VGA card feature connectors
- 50,000-hour reliability with no brightness degradation over the life of the product

BLOCK DIAGRAM

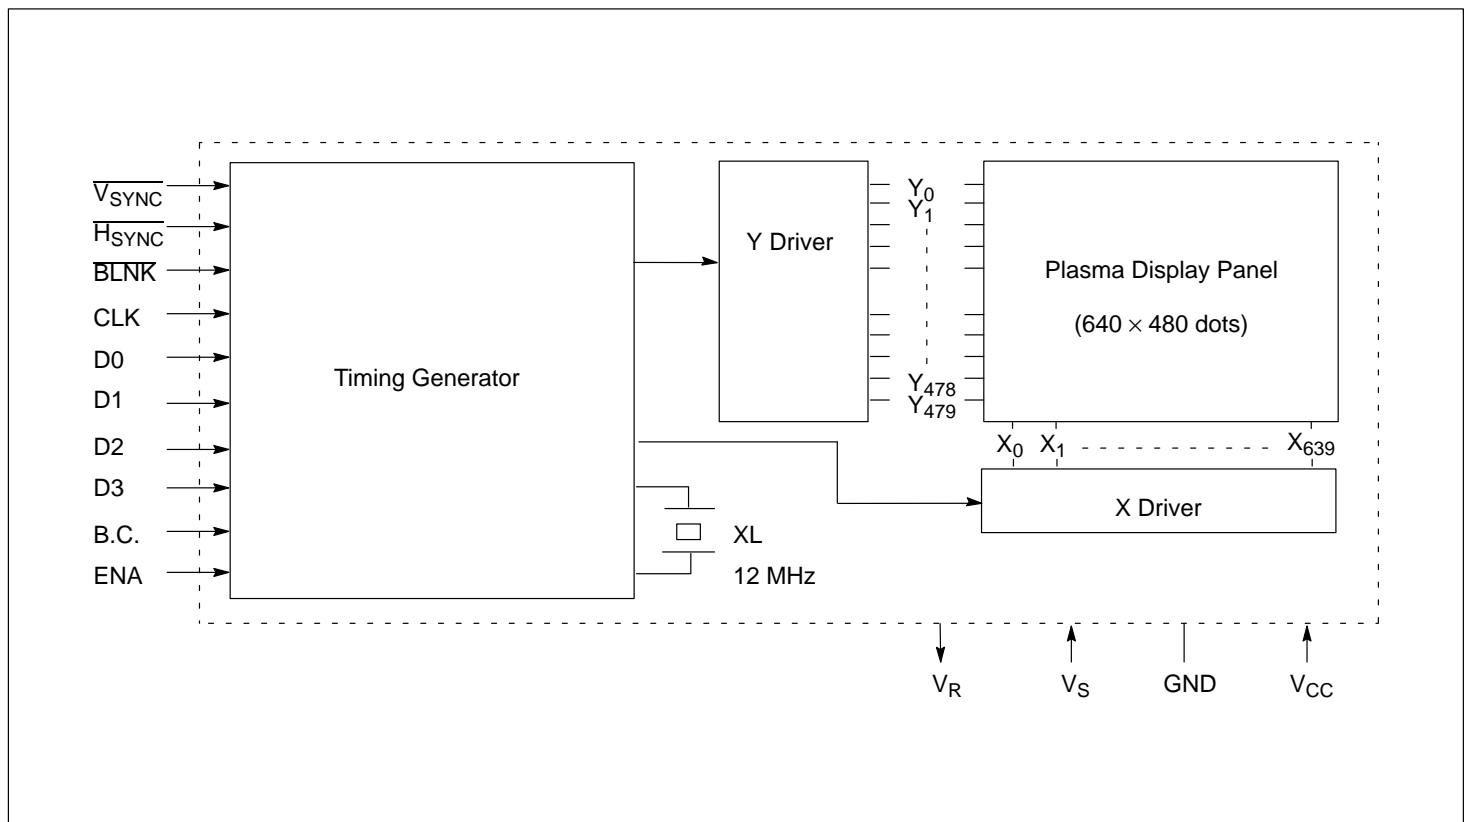

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Rating
Voltage for Sustain Driver	V_S	120 V
Voltage for Logic	V_{CC}	7 V

DC Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Input Voltage (H – Level)	V_{IH}		2.0	—	5.25	V
Input Voltage (L – Level)	V_{IL}		–0.5	—	0.8	V
Input Current (H – Level)	I_{IH}	$V_{IH} = 2.75 \text{ V}$, $V_{CC} = 5.25 \text{ V}$	—	—	20	μA
Input Current (L – Level)	I_{IL}	$V_{IH} = 0.4 \text{ V}$, $V_{CC} = 5.25 \text{ V}$	—	—	–16	mA

Input Power

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
For Display	Voltage ^{1,2}	V _S	Variable	88	95	100.5	V
	Ripple/Noise	V _{NRS}	At Resistive Load	—	—	500	mV
	Stability (avg.)	—	At Resistive Load	—	—	±1.5	%
	(peak)	—	(I _S = 2 A)	—	—	-5	%
	Current (avg.) ^{3, 4, 5,} (peak) ⁶	I _S I _{SP}	T _{HSYNC} = 31.78 μs/H 5 to 8 μs cycle	50 0.5	— —	340 2	mA A
For Logic	Voltage	V _{CC}		4.75	5	5.25	V
	Ripple/Noise	V _{NRC}	At Resistive Load	—	—	50	mV
	Stability	—	At Resistive Load	—	—	±5	%
	Current (avg.)	I _{CC}		150	—	500	mA

- Notes:**
- ¹ Variable power supply is required for voltage V_S (for display) because each display unit requires voltage within the range specified in the above table.
 - ² Specific voltage for V_S is indicated on each display unit. However, when using V_R (reference voltage), it is possible to adjust the specified voltage automatically. Each display unit outputs a specific V_R voltage corresponding to the V_S voltage required by each display unit. The relationship between V_S and V_R is as follows:
 $V_S = 88 + V_R \times 5 \text{ (V)}$
 Example: $V_S = 93 \text{ V} \rightarrow V_R = 1.0 \text{ V}$
 - ³ Current I_S is specified under the conditions listed below.
 Minimum: displayed ratio = 0%
 Maximum: displayed ratio = 100%
 - ⁴ The I_S value changes corresponding to the cycle period of $\overline{H_{SYNC}}$.
 - ⁵ The value of I_S is 10 mA under the following conditions:
 When V_{CC} is not supplied.
 For three frame periods after V_{CC} is supplied. (Operation starts after the input of four pulses of $\overline{V_{SYNC}}$.)
 When $\overline{H_{SYNC}}$ is not input.
 When the enable signal level is “L” (low).
 - ⁶ 1 μs pulse width at $I_{SP} = 1 \text{ A}$

Output Power

	Item	Symbol	Condition	Min.	Typ.	Max.	Unit
For V_S Adjust	Voltage	V_R	At 1 k Ω Load	0	—	2.5	V
	Ripple/Noise	V_{NRR}	At 1 k Ω Load	—	—	± 500	mV
	Stability (avg.)	—	At 1 k Ω Load	—	—	± 0.1	%
	Current (avg.)	I_{CC}	At 1 k Ω Load	—	—	10	mA

Note: V_R is preset to relate to V_S as follows:

$$V_S = 88 + V_R \times 5 \text{ (V)}$$

Example: $V_S = 93 \text{ V} \rightarrow V_R = 1.0 \text{ V}$

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Value
Number of Display Dots	640 (H) \times 480 (V) dots (307,200 dots)
Dot Pitch	0.33 (H) mm \times 0.33 (V) mm (0.013 in. \times 0.013 in.)
Dot Size	Approx. 0.2 mm (0.008 in.) dia.
Effective Screen Area	210.87 (H) mm \times 158.07 (V) mm (8.302 in. \times 6.223 in.)
Gray Scale	16 levels
Display Color	Neon orange
Dot Brightness (peak) (average)	110 cd/m ² typ. 15 cd/m ² typ. (12 cd/m ² min.) at 31.5 kHz frequency of $\overline{H_{SYNC}}$
Brightness Control	Variable from 10 to 100%
Contrast Ratio	20:1 min.
Viewing Angle	160° min.
Brightness Unevenness	30% max.
Weight	1 kg

Performance Specifications


Item	Value
Vibration Acceleration:	2 G max.
Frequency:	10 to 55 Hz
Time:	Operation: 5 minutes in X and Y direction Non-operation: 2 hours in Z direction
Shock (at non-operation) Acceleration:	40 G max. in X and Y direction 20 G max. in Z direction
Time:	11 ms
Operating Temperature	0 to 50°C
Storage Temperature	-20 to 70°C
Humidity	20 to 85% RH (No Condensation)
Pressure	Operation: 70,000 to 111,400 Pa Non Operation: 34,000 to 111,400 Pa

Physical Construction and Operation

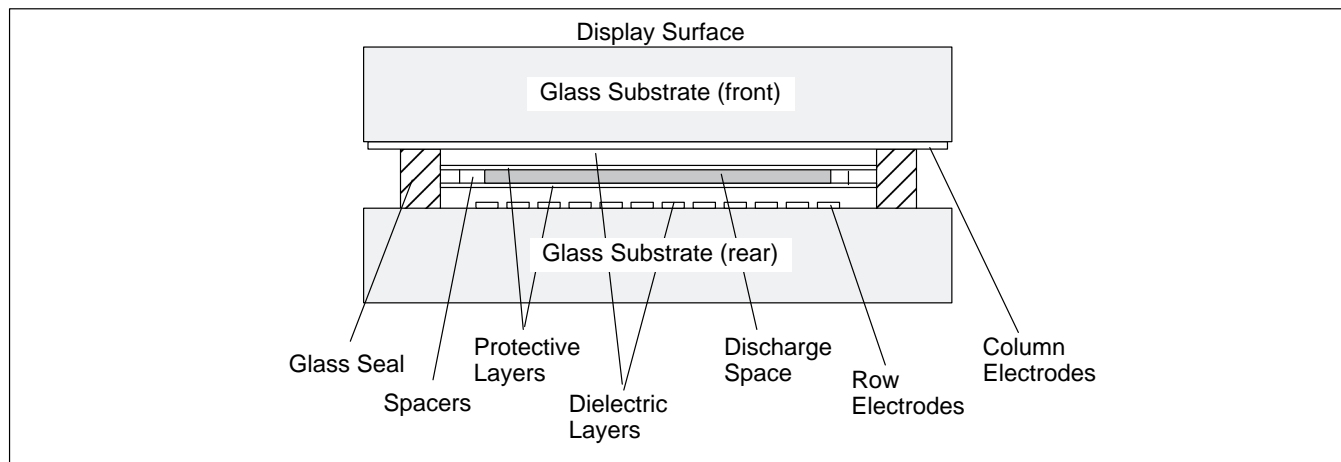

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

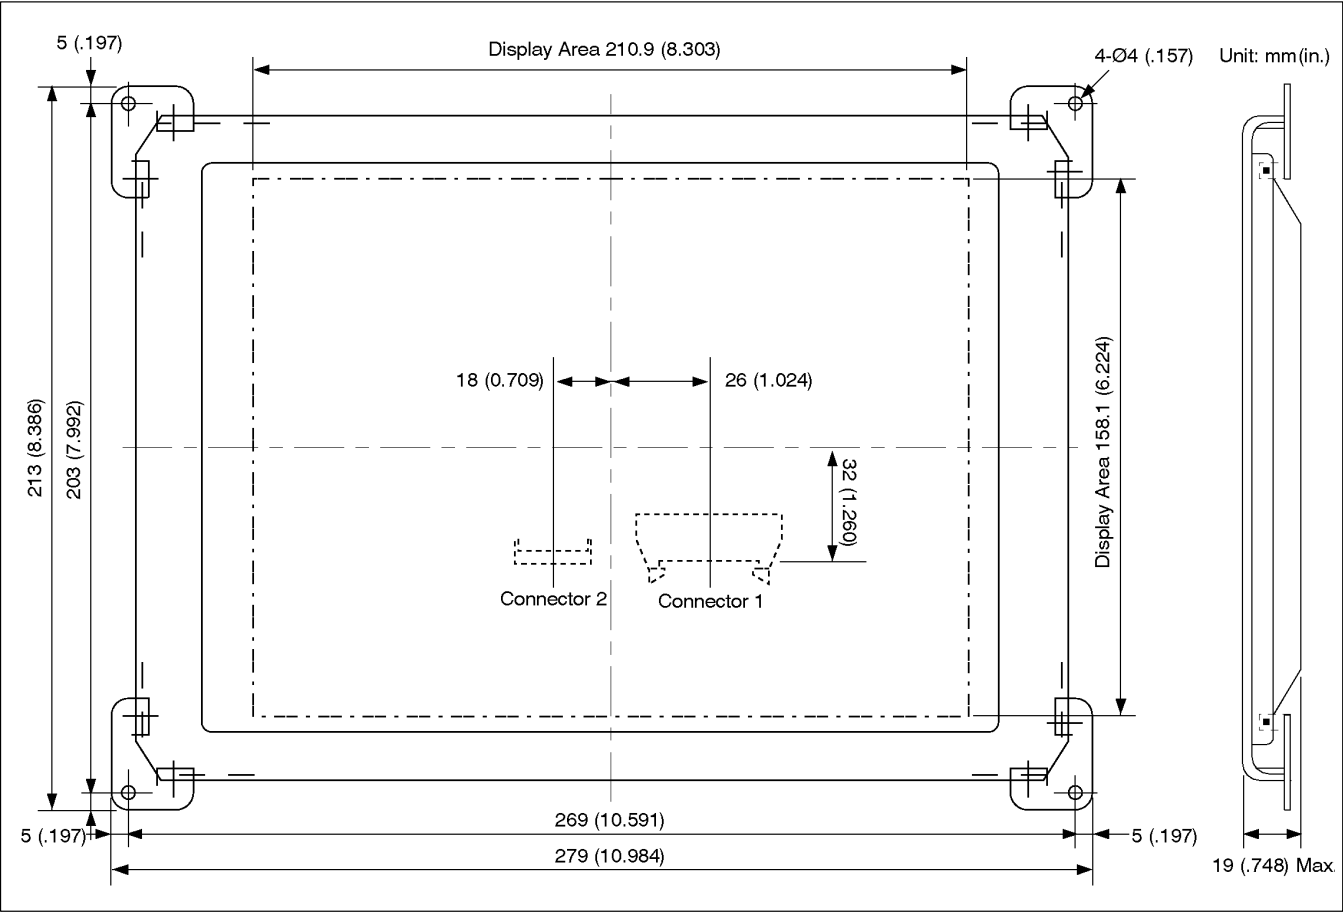

INTERFACE SIGNALS

Type of Signals (TTL Compatible)

Signal	Symbol	Signal Line	Definition and Function
Data Signal	D3 D2 D1 D0	4 Lines	Signal for display data: H = Light On, L = Light Off The relationship between display data and brightness level (gray scale level) is shown in the table below.
Clock Signal	CLK	1 Line	Timing signal to read display data (dot clock). Display data are read at the rising edge of CLK. If clock is continuous, display data are input when signal is at H level.
Blanking Signal	$\overline{\text{BLNK}}$	1 Line	Timing signal for no data input period. L = No data input period, H = Data input period This is equivalent to display timing (Active:H).
Vertical Synchronous Signal	$\overline{\text{V}_{\text{SYNC}}}$	1 Line	Signal controlling the refresh speed of the screen. Address returns to first electrode at the falling edge of this signal.
Horizontal Synchronous Signal	$\overline{\text{H}_{\text{SYNC}}}$	1 Line	Signal controlling the scanning timing of the line electrode at the falling edge of this signal. Input continuously at constant intervals.
Display Control Signal	ENA	1 Line	H = Light On, L = Light Off
Brightness Control Signal	B.C.	1 Line	Signal controlling display brightness by the pulse duty cycle synchronous with $\overline{\text{H}_{\text{SYNC}}}$ signal. (8 levels of brightness can be selected. 1 cycle is the period of 8 $\overline{\text{H}_{\text{SYNC}}}$ pulses.)

Relationship Between Display Data and Brightness Level (Gray Scale)

Interface Signal					Relative Brightness Level (Relative Level)
ENA	D3	D2	D1	D0	
L	X	X	X	X	Black (0)
H	L	L	L	L	Brightness Level 0
H	L	L	L	H	Brightness Level 1
H	L	L	H	L	Brightness Level 2
H	L	L	H	H	Brightness Level 3
H	L	H	L	L	Brightness Level 4
H	L	H	L	H	Brightness Level 5
H	L	H	H	L	Brightness Level 6
H	L	H	H	H	Brightness Level 7
H	H	L	L	L	Brightness Level 8
H	H	L	L	H	Brightness Level 9
H	H	L	H	L	Brightness Level 10
H	H	L	H	H	Brightness Level 11
H	H	H	L	L	Brightness Level 12
H	H	H	L	H	Brightness Level 13
H	H	H	H	L	Brightness Level 14
H	H	H	H	H	Brightness Level 15

x: invalid

Interface Signal Timing Table

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	14.144	14.268	14.368	ms	350/400 lines display (70 Hz)
T_{VSYNC}	16.538	16.683	16.8	ms	480 lines display (60 Hz)
t_{WV}	1	—	—	H	H: cycle of horizontal sync. signal
t_{VH}	0	—	—	μs	
t_{HV}	1	—	—	μs	
T_{HSYNC}	31.5	31.778	32.0	μs	(31.5 kHz)
t_{WH}	1	—	—	μs	
t_{HC}	1	—	—	μs	
t_{CH}	0	—	—	μs	
T_{CLK}	34	—	—	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{WCLK1}	15	—	—	ns	
t_{WCLK2}	15	—	—	ns	
t_{SUD}	15	—	—	ns	
t_{HD}	10	—	—	ns	
t_{SUB}	5	—	—	ns	
t_{HB}	15	—	—	ns	
t_{CD}	20	—	—	μs	

Relationship Between Waveform Conditions and Vertical Effective Display

Symbol	Condition	Effective Display	Number of Display Lines	Remarks ^{3,4,5}
T_{VDA}	$N = 525^1$	$H_{35} - H_{514}$	480	T_{VDA} : Vertical data period H_n : Horizontal period N : Number of horizontal periods in a single vertical period
T_{VDA}	$N = 449^2$	$H_{35} - H_{434}$	400 or 350	

Notes: ¹ The display enters 480-line mode when $N = 525$ and displays horizontal period (H_{35}) data on the first line and H_{514} data on line 480.

² The display determines 400-line mode or 350-line mode when $N = 449$. The two modes are not distinguished. When the top display is set, H_{35} data is displayed on line 2 and H_{434} data on line 401. When the center display is set, H_{35} data is displayed on line 33 and H_{434} data on line 432.

³ An effective clock signal is required for the vertical data period (T_{VDA}) and also for the single horizontal period immediately before. Other periods do not need effective clock signals.

⁴ Do not enter data except during the above vertical data period (T_{VDA}). Data entry will be ignored if no effective clock signals are input.

⁵ In V-mode, the unit can be used only under the conditions in Note 1 and Note 2.

Relationship Between Waveform Conditions and Vertical Effective Display Period

Symbol	Standard Value	Unit	Condition	Remarks ^{1, 2, 3, 4}
T _{ACK}	656	CK	K = 656 (number of effective clock signals)	The effective period of horizontal data is from 9 (I = 9) for 9 clock signals to 648 (J = 648) for 640 clock signals. CK: clock.
T _{BFD}	8	CK	Horizontal data is assumed to be 640 dots at J = 656	
T _{ACD}	640	CK		
T _{AFD}	8	CK		
T _{ACK}	328	CK	K = 328 (number of effective clock signals)	The effective period of horizontal data is from 5 (I = 5) for 5 clock signals to 324 (J = 324) for 320 clock signals. CK: clock.
T _{BFD}	4	CK	Horizontal data is assumed to be 320 dots at K = 328	
T _{ACD}	320	CK		
T _{AFD}	4	CK		


Notes: ¹ A clock signal is effective when the blanking signal level is high.

² The plasma display determines the number of horizontal display dots by counting the number of effective clock signals during the horizontal cycle.

³ For the 320-pixel display, each display data dot is doubled. The number of horizontal dots on the plasma screen thus becomes 640.

⁴ The number of effective clock signals during the horizontal period should be 656 or 328.

Interface Signal Timing Chart

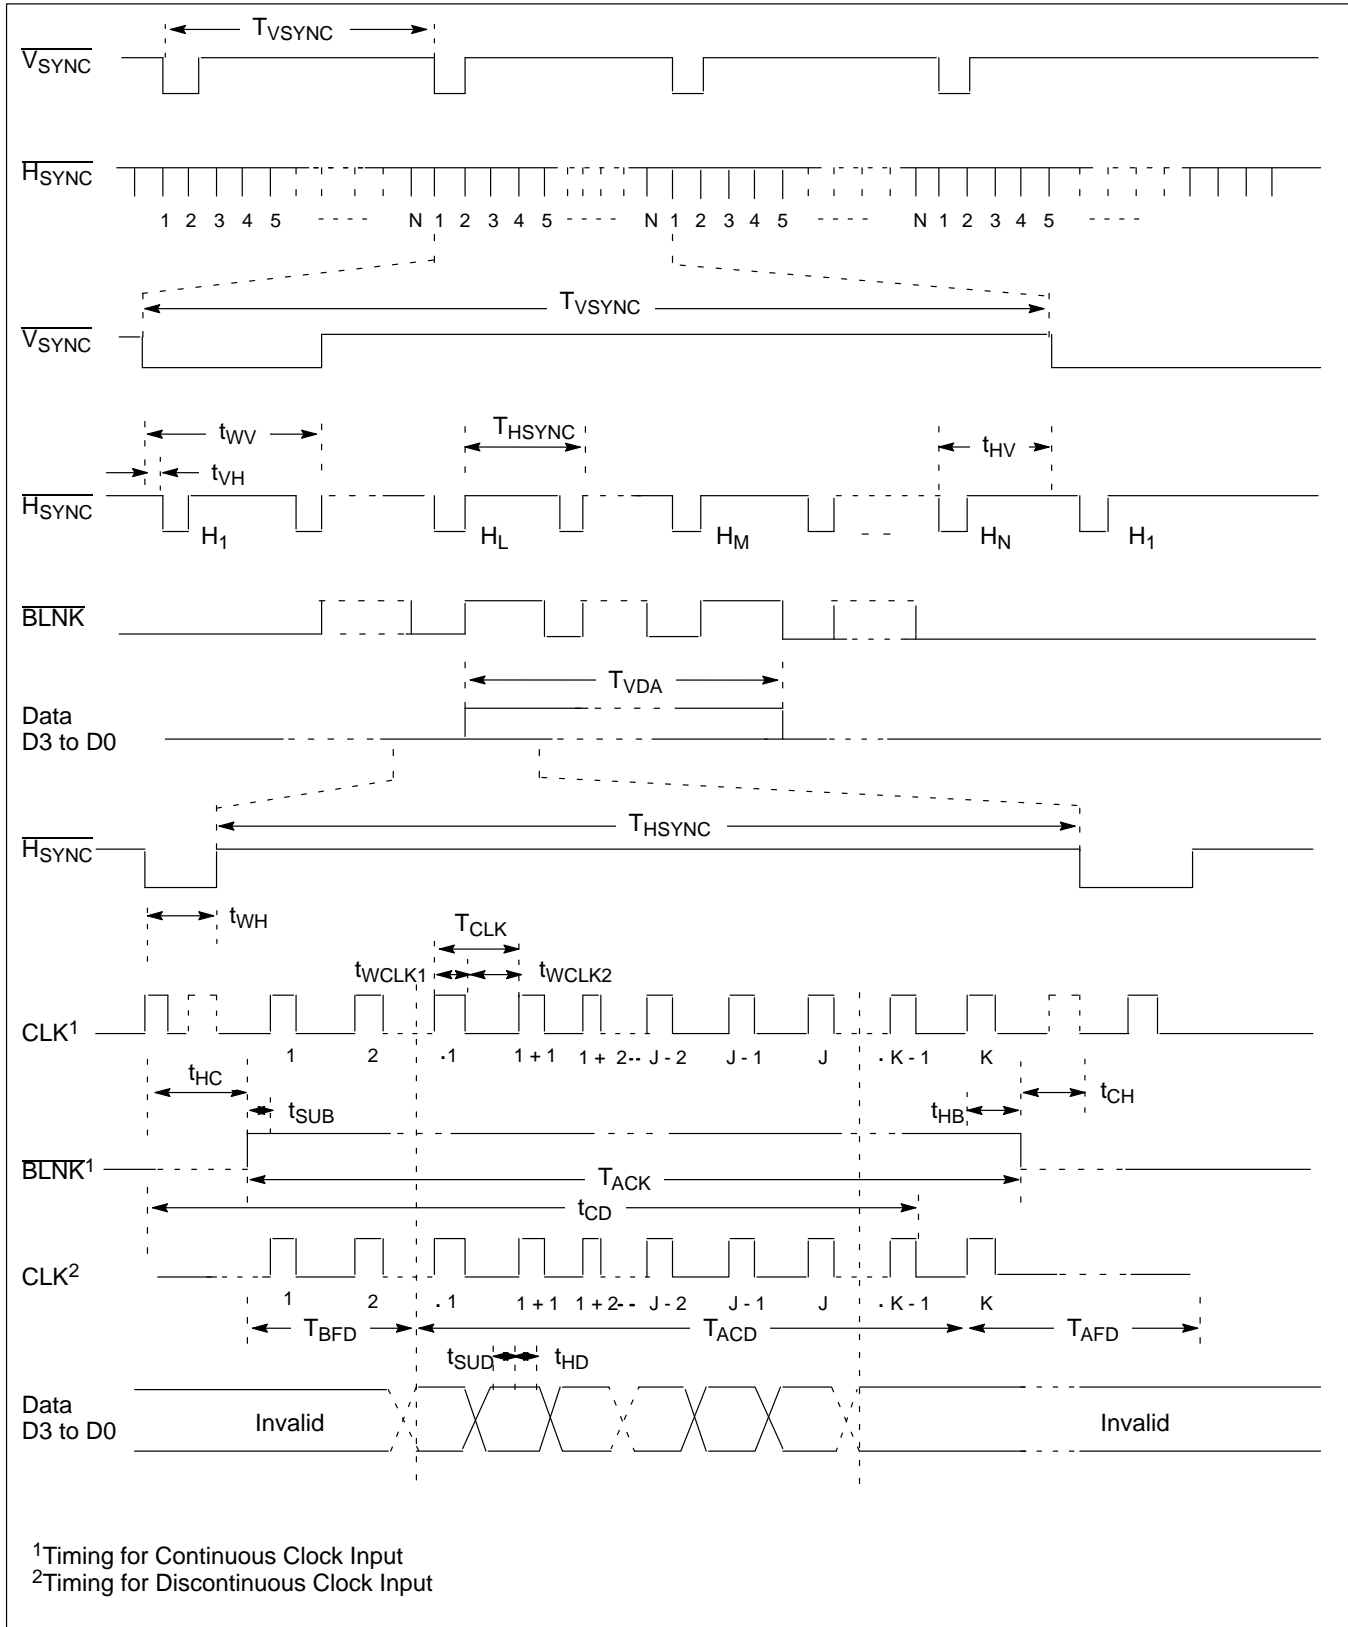

Brightness Control Timing


The brightness is controlled by the pulse form of the brightness control signal. Brightness varies depending on its duty cycle.

Symbol	Min.	Typ.	Max.	Unit	
T _B	8	8	8	H	H: A Cycle of $\overline{H_{\text{SYNC}}}$ Signal
T _{BH}	0	—	8	H	


* Brightness is at its maximum at 8xH and 7xH.

Brightness Control Signal Timing Diagram

The brightness control signal is synchronized with the rising edge of the $\overline{H_{\text{sync}}}$ signal.

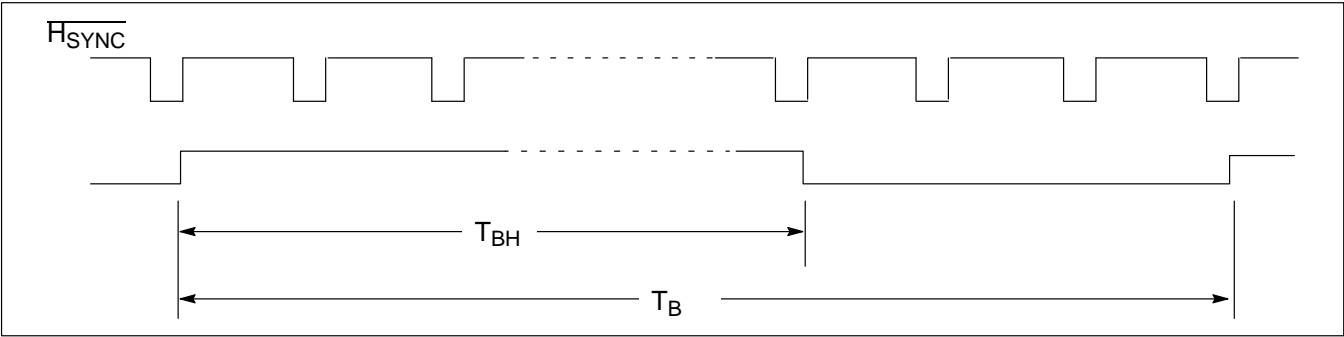

Interface Circuit

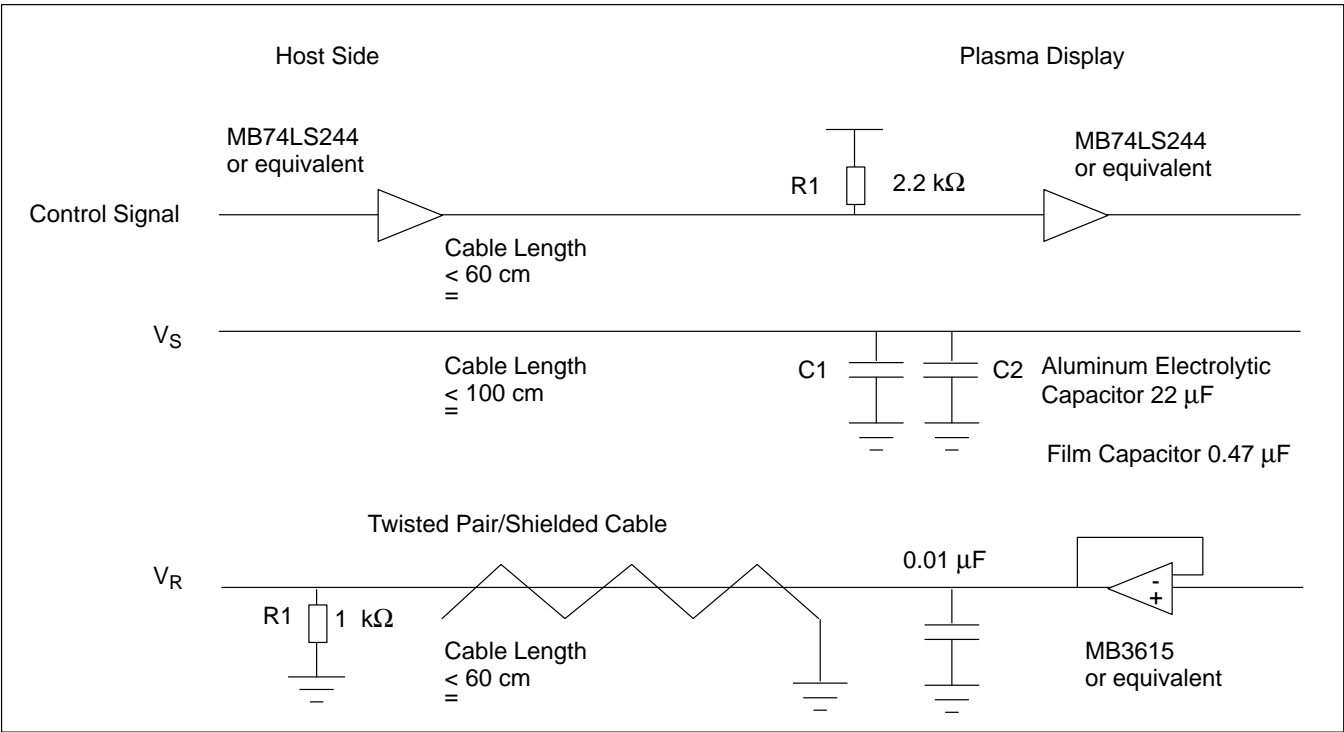

CONNECTOR PIN ASSIGNMENT

Signal Connector (FCN-605Q020-AU/N)

No.	Signal	No.	Signal
1	$\overline{V_{\text{SYNC}}}$	2	S. GND
3	$\overline{H_{\text{SYNC}}}$	4	S. GND
5	DATA D0	6	S. GND
7	DATA D1	8	S. GND
9	DATA D2	10	S. GND
11	DATA D3	12	S. GND
13	$\overline{\text{BLNK}}$	14	S. GND
15	CLK	16	S. GND
17	+5VDC	18	+5 VDC
19	B.C.	20	ENA

Note: Mating Connector (optional): FCN-607B020-G/D.

Power Supply Connector (FCN-815-009TA)

No.	Power Input
1	V_{CC}
2	GND
3	N.C.
4	GND
5	V_{S}
6	N.C.
7	N.C.
8	GND
9	V_{R}^*

Notes: Mating Connector (optional):
 FCN-813J009-A, Housing
 FCN-813J-T/Q, Contact (for hand tool)
 FCN-813J-T/R, Contact (for auto)

*This PDP unit outputs the voltage V_{R} from 0 to 2.5 VDC through the ninth terminal of the power supply connector. This supply voltage is used for the supply voltage adjustment FPF07P series power supply units.


Graphic Units
(large size) — *At a Glance*

Device	Page
FPF12896HRUF-B	6-3
FPF160128SRUA-001	6-13
FPF160128SRUA-020	6-23


FPF12896HRUF-B
Plasma Display Graphics Unit

The FPF12896HRUF-B plasma display graphics unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF12896HRUF-B a highly reliable display device.

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

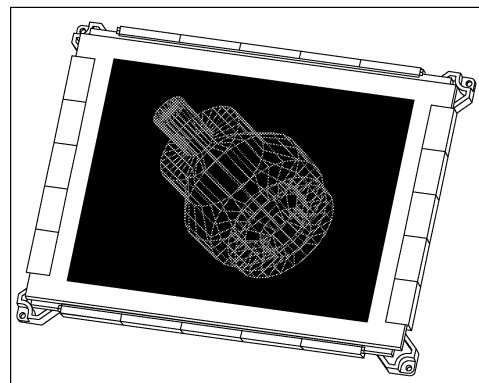

BLOCK DIAGRAM

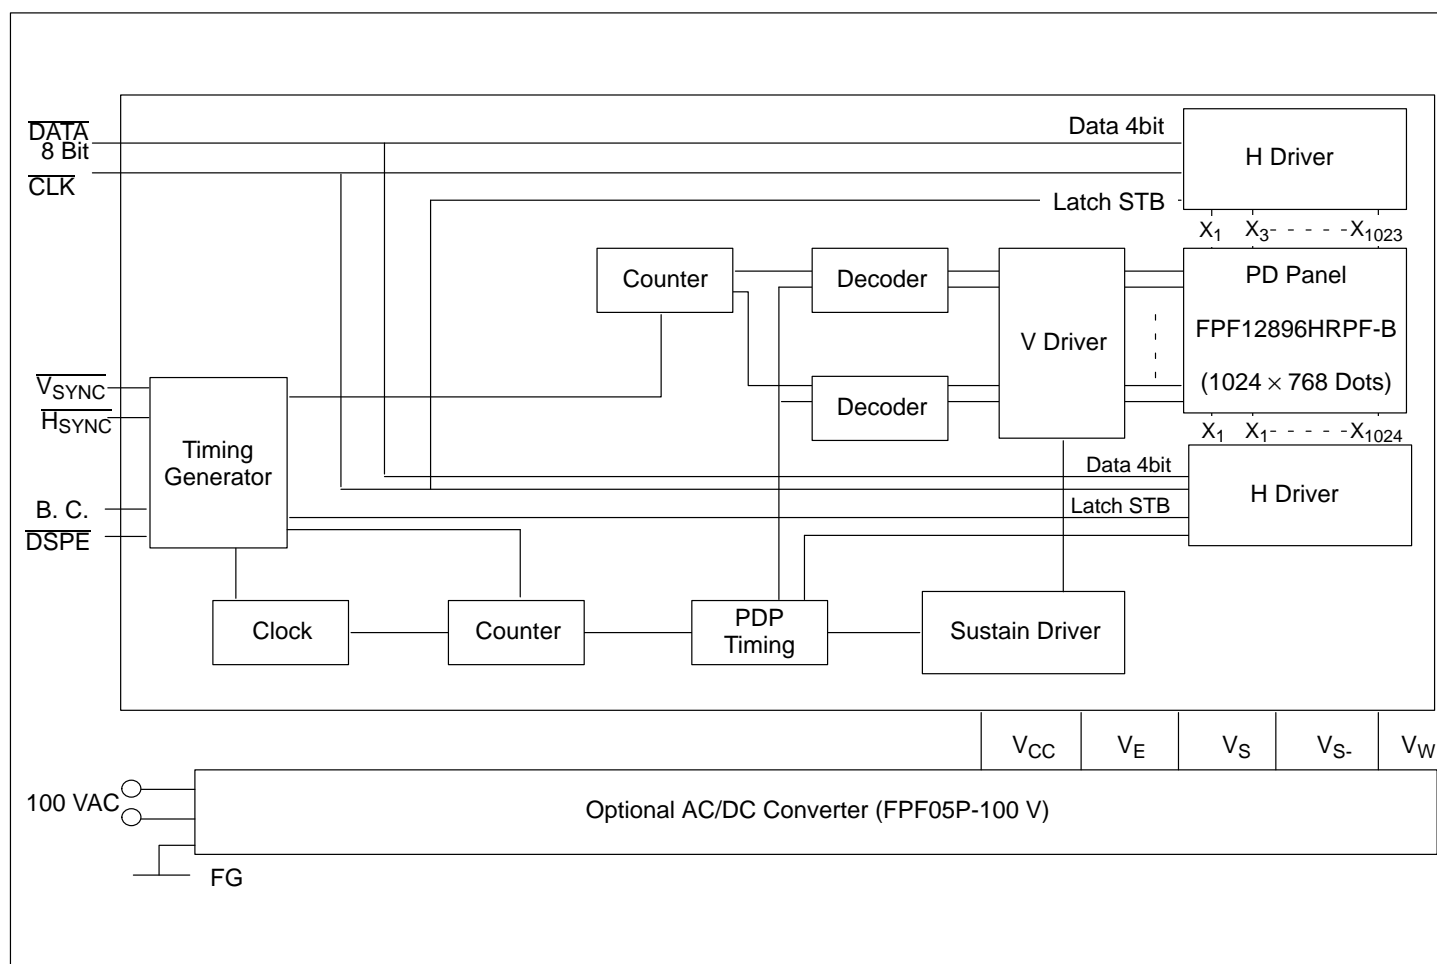

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Maximum Ratings
Voltage for Sustain Driver	V_S	+120 V
Voltage for Sustain Driver	V_{S-}	-120 V
Voltage for Writing Driver	V_W	+195 V
Voltage for Addressing	V_E	+45 V
Voltage for Logic	V_{CC}	+7 V

Operation Ratings

Item	Symbol	Voltage	Variable Range	Stability	Ripple	Current (Max.)
Voltage for Sustain Driver	V_S	+96 V	± 9 V	$\pm 2\%$ max.	600 mV _{PP} max.	400 mA
Voltage for Sustain Driver	V_{S-}	-96 V	± 9 V	$\pm 2\%$ max.	600 mV _{PP} max.	400 mA
Voltage for Writing Driver	V_W	+160 V	± 5 V	$\pm 3\%$ max.	100 mV _{PP} max.	50 mA
Voltage for Addressing	V_E	+37 V	—	$\pm 10\%$ max.	100 mV _{PP} max.	250 mA
Voltage for Logic	V_{CC}	+5 V	—	$\pm 5\%$ max.	100 mV _{PP} max.	1.0 A

Note: Variable power sources are required for V_S , V_{S-} , and V_W because they have specified voltages. Each specified voltage is indicated on each plasma display unit.

MECHANICAL SPECIFICATIONS

Physical Specifications


Item	Value
Number of Display Dots	1024 (H) × 768 (V) (786,432 dots)
Dot Pitch	0.3 mm (H) × 0.3 mm (V) (0.012 in. × 0.012 in.)
Dot Size	0.2 mm (0.08 in.) dia.
Effective Screen Area	307 mm (H) × 230 mm (V) (12.087 × 9.055 in.)
Display Color	Neon Orange
Dot Brightness	15 cd/m ² (5.9 fL) min. (plane average)
Brightness Unevenness	50% max. (at max. brightness)
Contrast Ratio	1:10 min. (at max. brightness)
Viewing Angle	160° min.
External Dimensions	309 (W) × 402 (H) × 35 (D) mm (12.165 × 15.827 × 1.378 in.)
Weight	3.5 kg (7.7 lb)

Performance Specifications

Item	Value
Operating Temperature	5 to 40°C
Operating Humidity	20 to 80% RH (no condensation)
Storage Temperature	−10 to 55°C
Storage Humidity	20 to 80% RH (no condensation)
Atmospheric Pressure	70,000 to 111,400 Pa
Vibration	
Acceleration:	2 G (max.)
Frequency:	10 to 55 Hz
Time:	Operation: 5 min. in X, Y, and Z direction. Non-Operation: 2 hr. in X, Y, and Z direction.
Shock (Non-Operation)	
Acceleration:	40 G (max.) in X and Y direction. 10 G (max.) in Z direction
Time:	11 ms

FPF12896HRUF-B

External Dimensions

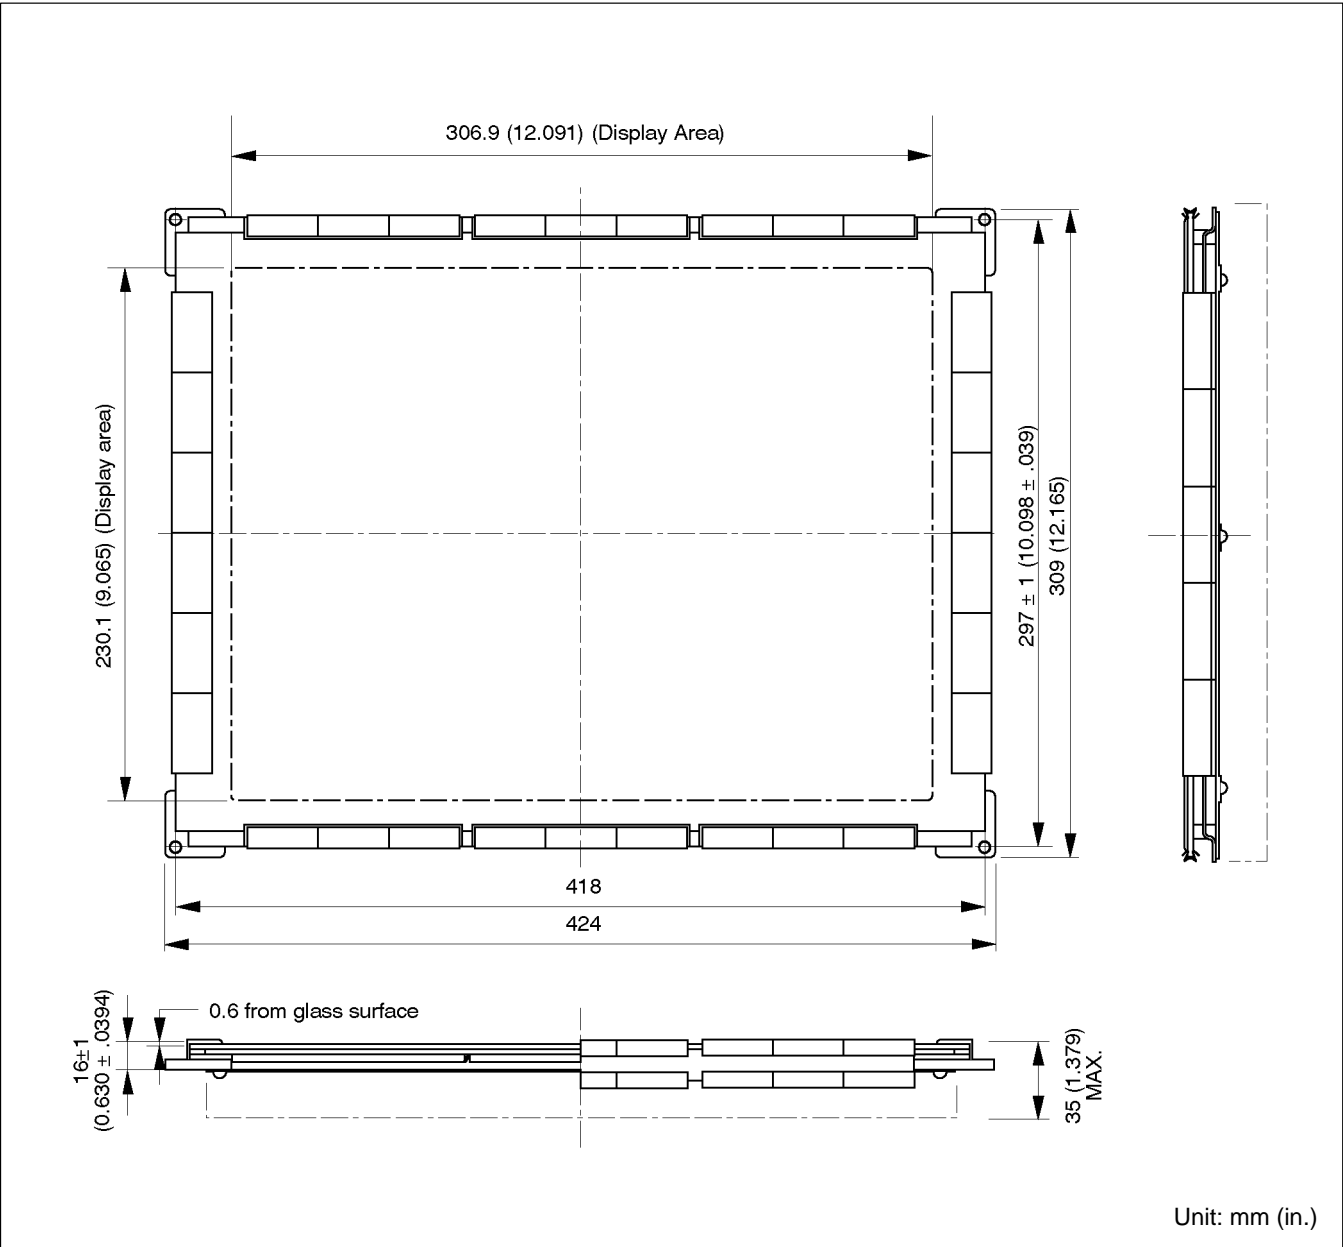

INTERFACE SIGNALS


Type of Signals (TTL)

Signal	Symbol	Data Line	Description
Data Signal	$\overline{\text{DATA0 to 7}}$	8	8-bit parallel display data. Logic: L: light on, H: light off Relationship between display data and display dots is shown in the figure on the following page.
Clock Signal	$\overline{\text{CLK}}$	1	Signal controlling the input of timing of display data. Display data are input at falling edge of this signal. Number of signals during one $\overline{\text{H}}_{\text{SYNC}}$ cycle is 128.
Line Synchronous Signal	$\overline{\text{H}}_{\text{SYNC}}$	1	Signal controlling the scanning timing of the line-electrode. Y address increment to select the next line electrode is done at the falling edge of each signal. The number of signals during the period of one $\overline{\text{V}}_{\text{SYNC}}$ must be 769 or more.
Frame Synchronous Signal	$\overline{\text{V}}_{\text{SYNC}}$	1	Signal controlling the refresh speed of the screen. The scanning position returns to the first electrode (home position) at the falling edge of the signal.
Brightness Control Signal	B. C.	1	Signal controlling the screen brightness. Logic: L: 67% maximum brightness H: maximum brightness.
Display Enable Signal	$\overline{\text{DSPE}}$	1	Signal controlling the display enable. Logic: L: Light on. H: Light off whole screen display.

Recommended Driving Condition

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Input Voltage (H-Level)	—	V_{IH}	2.4	—	—	V
Input Voltage (L-Level)	—	V_{IL}	—	—	0.4	V
Input Current (H-Level)	$V_{\text{IH}} = 2.75 \text{ V}, V_{\text{CC}} = 5.25 \text{ V}$	I_{IH}	—	—	10	mA
Input Current (L-Level)	$V_{\text{IL}} = 0.4 \text{ V}, V_{\text{CC}} = 5.25 \text{ V}$	I_{IL}	—	—	-16	mA


Relationship Between Display Data and Display Dot

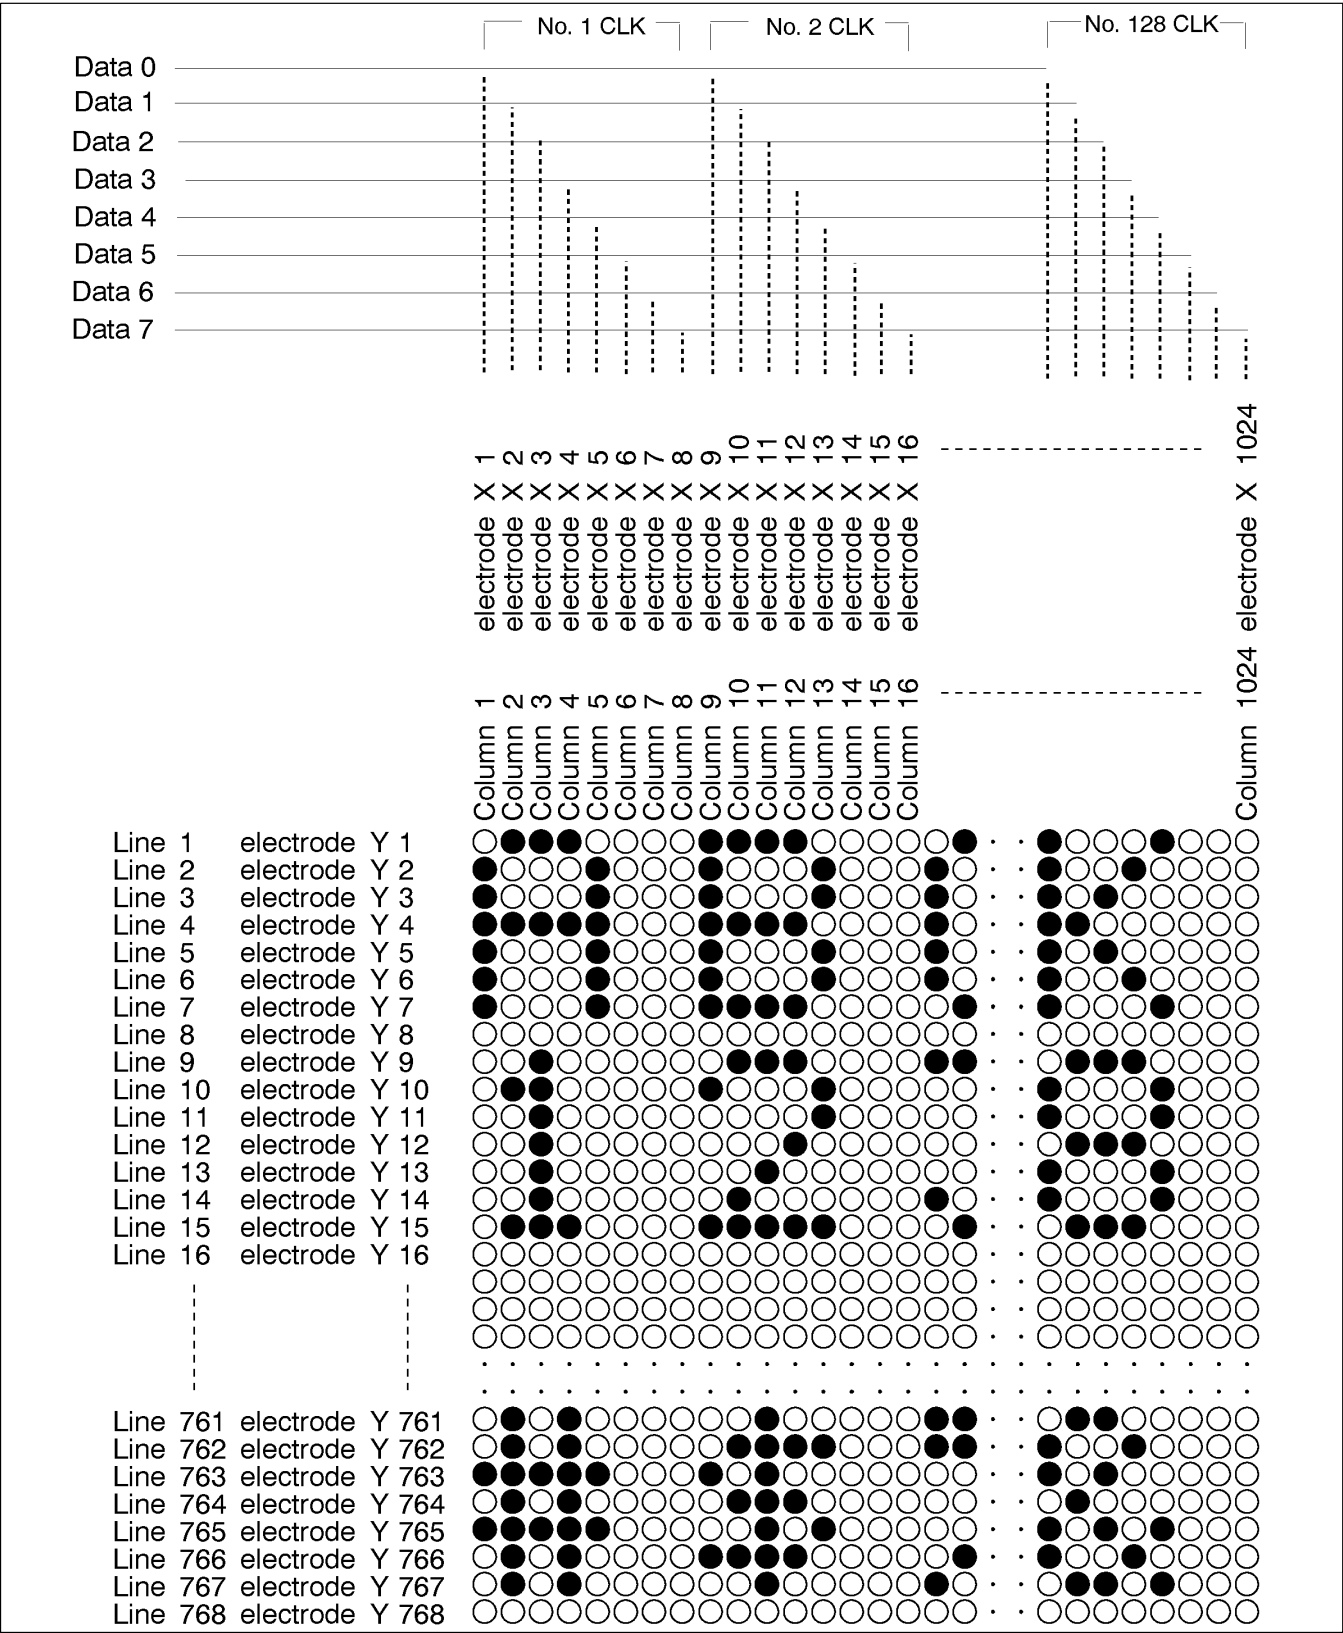


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	61.44	65		ms	$F_{VSYNC} = 15 \text{ Hz (Typ.)}$
t_{WV}	2	160		μs	
t_{VH}	1	77		μs	
t_{HV}	2	5		μs	
T_{HSYNC}	80	82	90	μs	
t_{WH}	2	5		μs	
t_{HC}	5	10		μs	
t_{CH}	1	8		μs	
t_{CLK}	300	500		ns	$F_{CLK} = 2 \text{ MHz (Typ.)}$
t_{WCLK1}	150	250		ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ Duty Cycle = 50% (Typ.)
t_{WCLK2}	150	250		ns	
t_{SUD}	100	180		ns	
t_{HD}	80	135		ns	

Interface Circuit

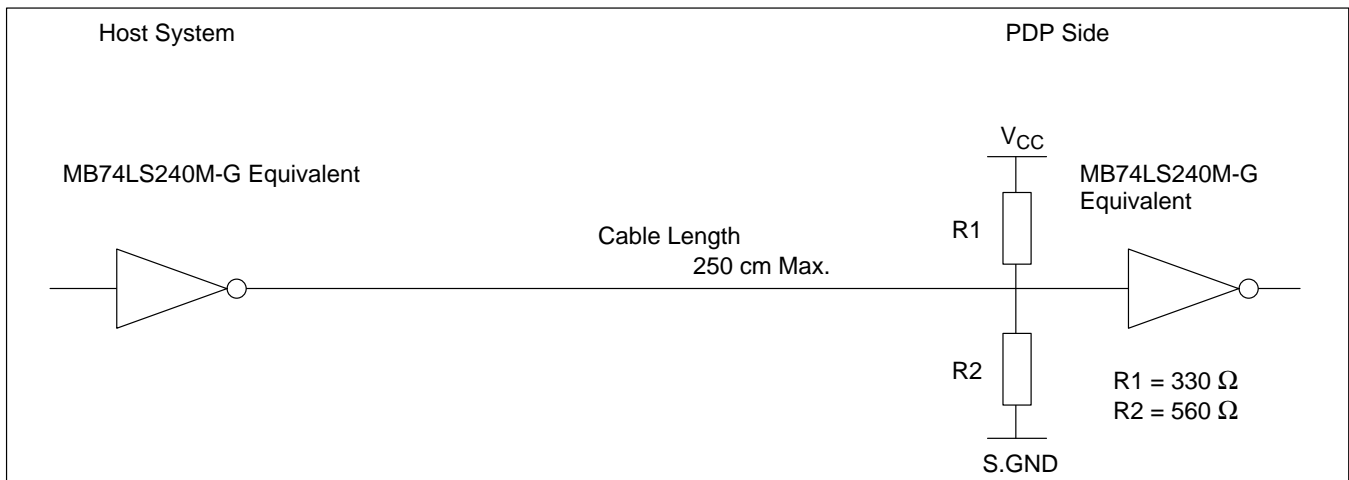

Interface Signal Timing Chart

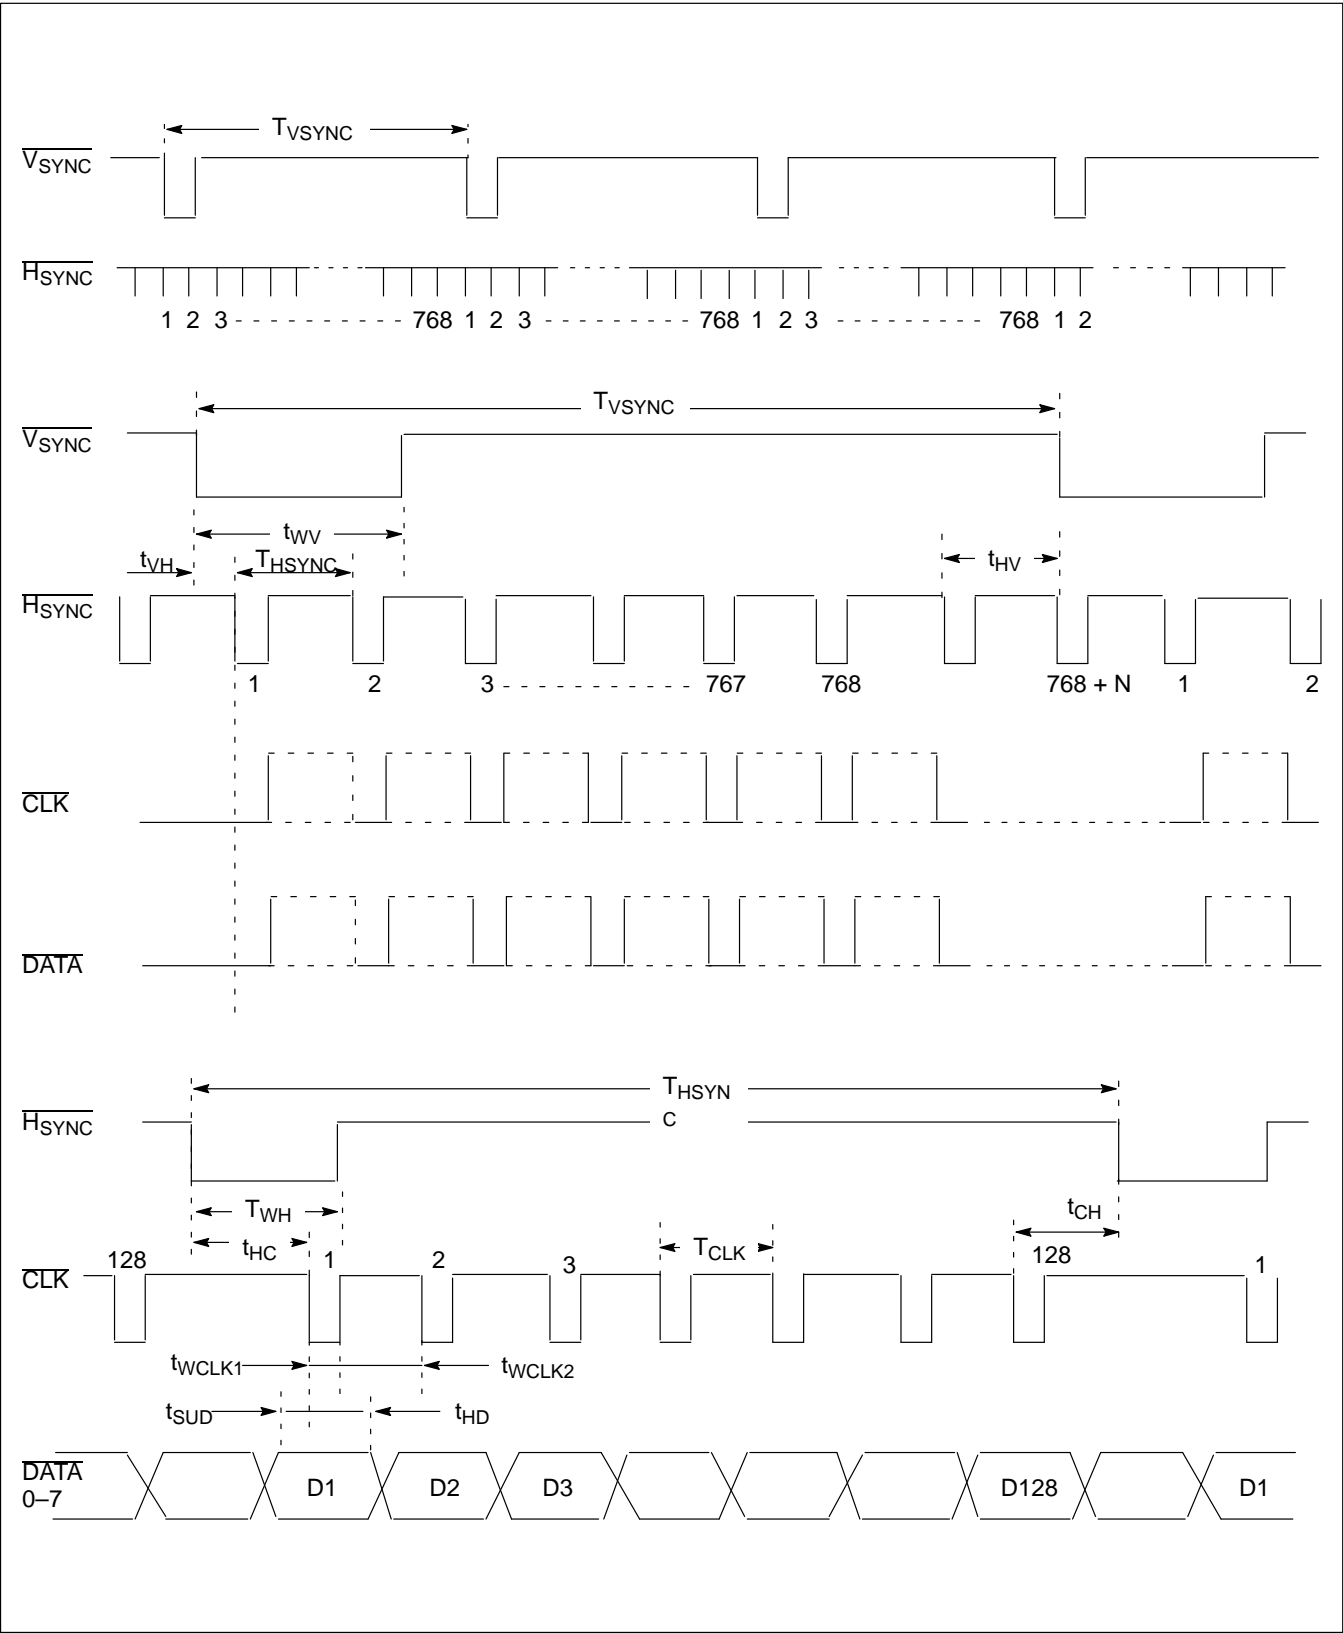


CONNECTOR PIN ASSIGNMENT

Signal Connector

P/N:HIF6-34PA-1.27DS (by Hirose) Applicable Connector: HIF6-34B-1.27R (by Hirose)

Pin No.	Signal	Pin No.	Signal	Pin No.	Signal	Pin No.	Signal
1	$\overline{\text{DATA 0}}$	2	S. GND	19	H _{SYNC}	20	S. GND
3	$\overline{\text{DATA 0}}$	4	S. GND	21	V _{SYNC}	22	S. GND
5	$\overline{\text{DATA 0}}$	6	S. GND	23	DSPE	24	S. GND
7	$\overline{\text{DATA 0}}$	8	S. GND	25	B. C.	26	S. GND
9	$\overline{\text{DATA 0}}$	10	S. GND	27	N.C.	28	S. GND
11	$\overline{\text{DATA 0}}$	12	S. GND	29	N.C.	30	S. GND
13	$\overline{\text{DATA 0}}$	14	S. GND	31	V _{CC} (OUT)	32	S. GND
15	$\overline{\text{DATA 0}}$	16	S. GND	33	V _{CC} (OUT)	34	S. GND
17	$\overline{\text{CLK}}$			35	V _{CC} (OUT)		

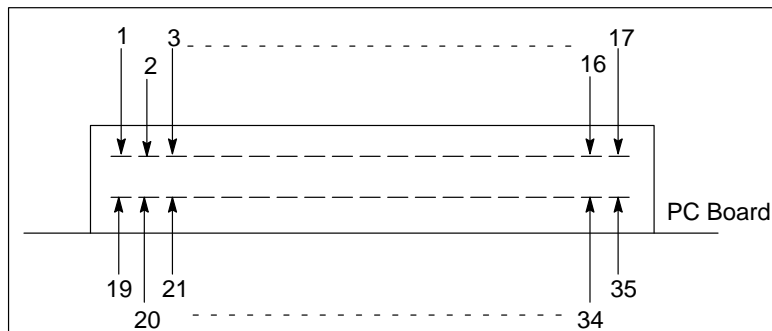

- Notes:**
1. This figure shows the connector viewed from the mating surface.
 2. Though the mounted connector has 34 terminals, the pins are numbered as a 36-terminal connector. (No. 18 and 36 are not specified.)
Numbering on the PC board is the same as in this figure.
 3. V_{CC} terminals output +5 VDC.

FPF12896HRUF-B

Power Supply Connector

P/N: 65595-113#10 (by Berg)

Pin No.	Symbol	Voltage
1	V_W	165 V
2	N.C.	—
3	V_S	95 V
4	—*	—
5	GND (H)	0 V
6	GND (H)	0 V
7	N.C.	—
8	V_{S-}	-95 V
9	N.C.	—
10	S. GND	0 V
11	S. GND	0 V
12	V_E	37 V
13	V_{CC}	5 V

Notes: Applicable Connector:
Housing: 65486-13 (by Berg)
Contact: 76804-36 (by Berg)


*Polarization key inserted

FPF160128SRUA-001


Plasma Display Graphics Unit

The FPF160128SRUA-001 plasma display graphics unit consists of an AC gas discharge plasma display panel with bi-stable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF160128SRUA-001 a highly reliable display device.

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

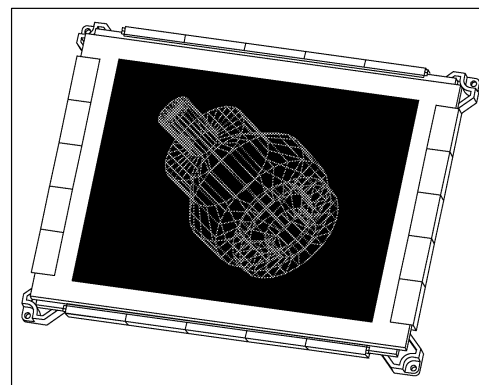

BLOCK DIAGRAM

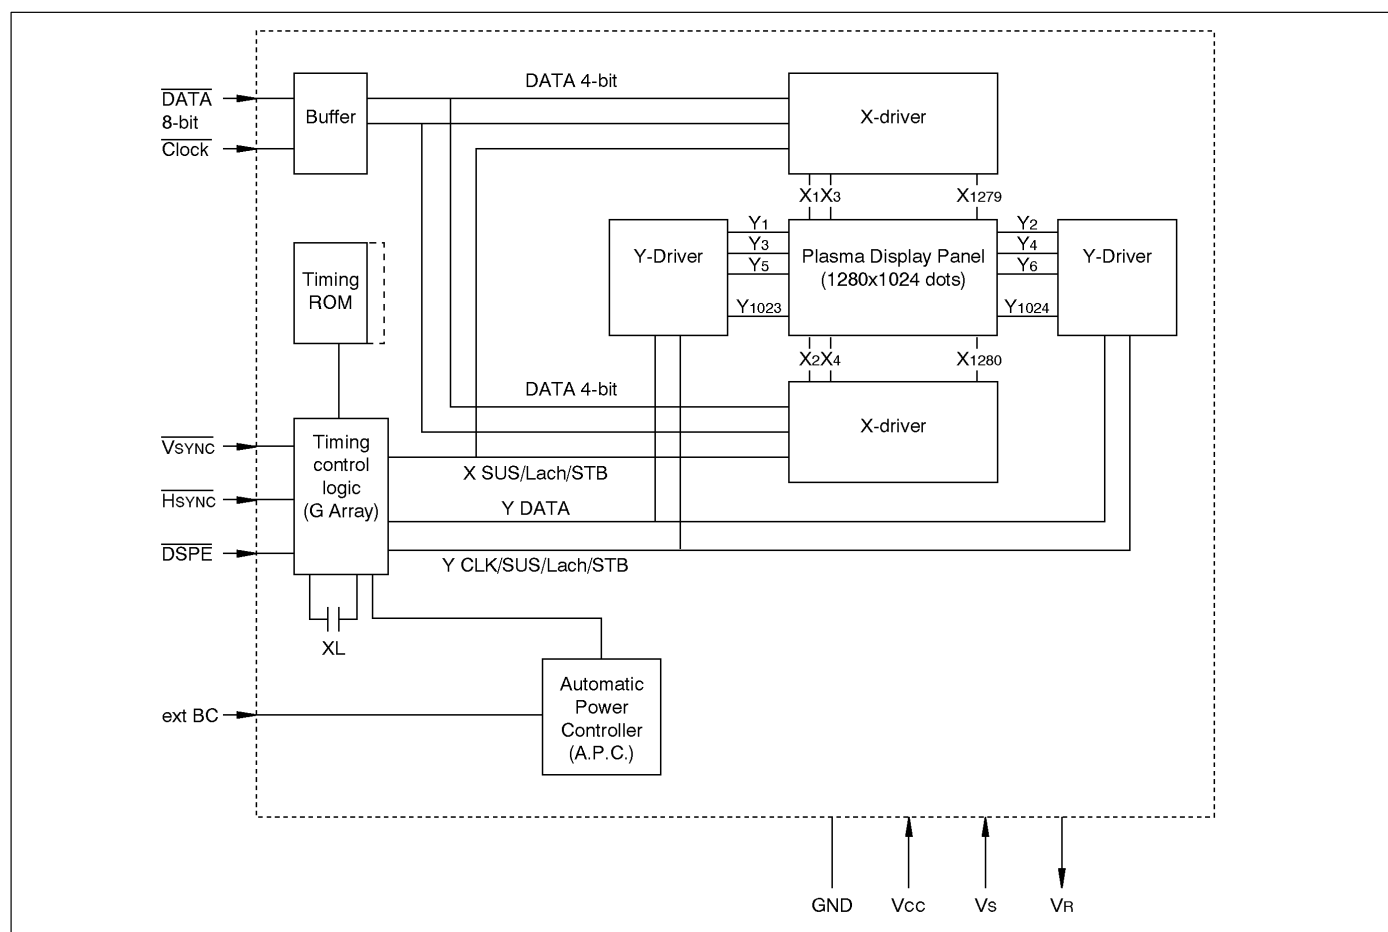

SPECIFICATIONS**Display Performance**

Item	Performance
Number of display dots	1,310,720 dots (1280 X 1024 dots)
Dot pitch	0.25 mm (0.01 in) aspect ratio: 1:1
Dot size	0.15 mm diameter (0.006 in)
Display area	319.75 (H) X 255.75 (V) mm diagonal: 16 in (12.589 X 10.069 in)
Display color	Neon orange
Brightness	18 cd/m ₂ typical, 12 cd/m ₂ minimum Plane average of solid pattern in 8x8 dots area Display ratio: up to 25% H _{SYNC} = 31.25 μs Is = 300 mA
Brightness unevenness	40% maximum (20% maximum in each 10 mm distant area)
Contrast ratio	1 : 20 minimum
Maximum viewing angle	140° typical
Defective dots	<u>Total 30 dots maximum</u> 2 adjacent dots: 6 portion maximum 3 adjacent dots: 0 portion 3 dots maximum in any 32 x 32 dots area (including flickering dots)

Environmental Conditions

Item	Rating
Operating temperature	0 to +50° C
Operating humidity	20 to 80% RH (no condensation)
Storage temperature	–20 to +70°C
Storage humidity	20 to 80% RH (no condensation)
Atmospheric pressure	700 to 1114 hPa

MECHANICAL SPECIFICATIONS

Physical Specifications

Item	Specification
Dimension (H) X (W) X (D)	See External Dimensions figure 309 X 402 X 30 mm (12.165 x 15.827 x 1.81 in)
Weight	3.0 kg (max)
Vibration	Acceleration: 2G maximum Frequency: 10 to 55 Hz Time: Operation: 5 minutes in each direction of X, Y, Z No operation: 2 hours in each direction of X,Y,Z
Shock (no operation)	Acceleration: 40G maximum in each direction X, Y 20G maximum in the direction of Z Time: 11 ms

Electrical Characteristics


Item	Symbol	Voltage	Stability (Max)	Ripple (Max)	Current (Max)
Logic	V_{CC}	+5V	$\pm 5\%$	100 mV _{PP}	0.3A
Sustain driver	V_S	+88 to 100.5V	$\pm 0.5\%$	500 mV _{PP}	Set value \pm 30mA
V_S reference	V_R	Set value	$\pm 0.05V$	500 mV _{PP}	10mA

Notes: Current for sustain driver (V_S) is specified by set value of Automatic Power Controller (APC). Typical set value is 300 mA.
For the V_S voltage setting, the plasma display unsit outputs the reference voltage V_S .

Absolute Maximum Ratings

Item	Symbol	Rating
Supply voltage for logic	V_{CC}	+ 7V
Supply voltage for sustain	V_S	+120 V

External Dimensions

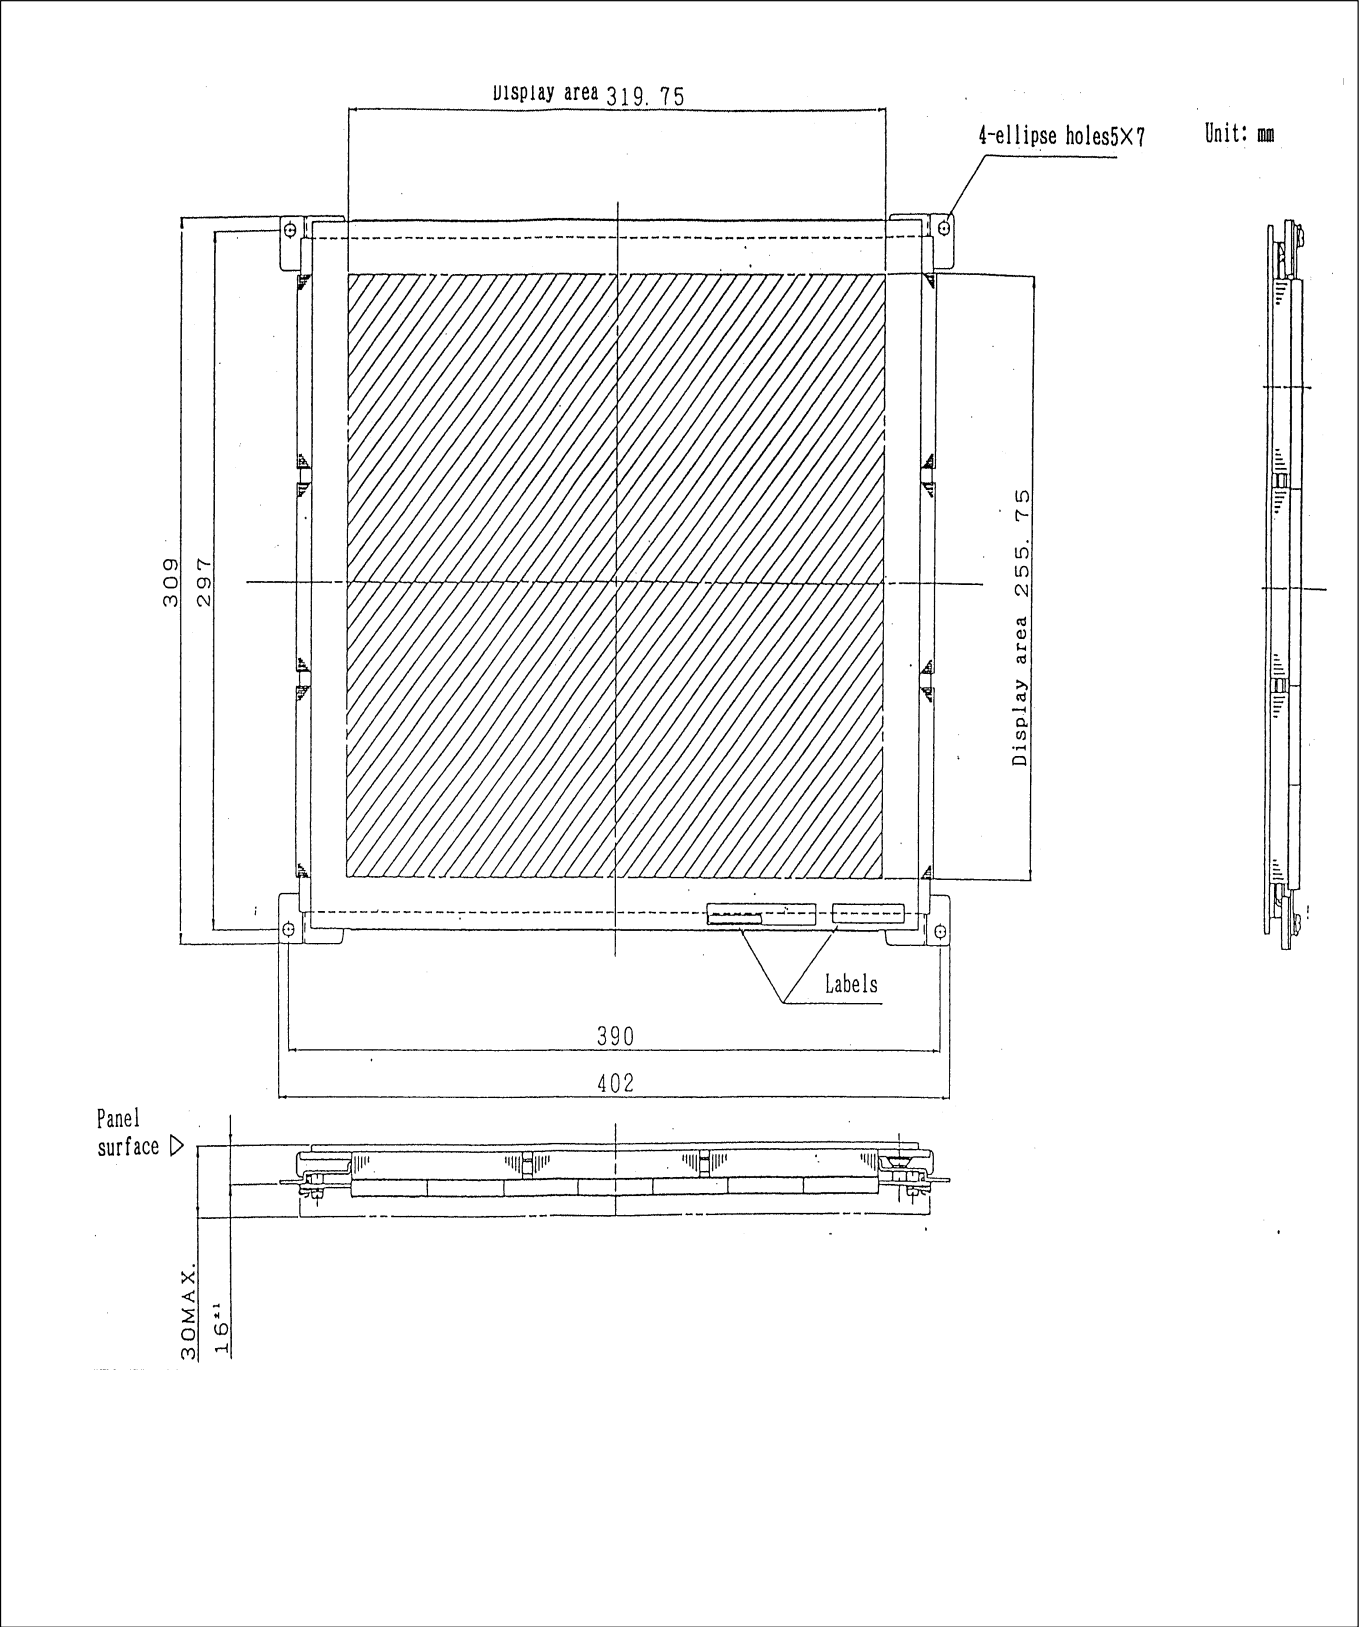

INTERFACE SIGNALS

Type of Signals

Signal	Symbol	Data Line	Description
Display data	$\overline{D0} \sim \overline{D7}$	8	8-bit parallel display data. Logic: L: On, H: Off The figure on page 6 shows the relation between data $\overline{D0} \sim \overline{D7}$ and display position.
Clock	\overline{CLK}	1	Signal controlling the input of timing of display data. Display data is input at falling edge of \overline{CLK} and transferred in sequence. Number of signals in one $\overline{H_{SYNC}}$ period is 160.
Horizontal synchronous	$\overline{H_{SYNC}}$	1	Signal controlling the scanning timing and display time of each line electrode. Address increment to the next line is done at the falling edge of $\overline{H_{SYNC}}$. The number of signals in one $\overline{V_{SYNC}}$ period is required to be 1024 or more, and a continuous signal is required.
Vertical synchronous	$\overline{V_{SYNC}}$	1	Signal controlling the refresh speed of the screen. The scanning position returns to the first electrode at the falling edge of the $\overline{V_{SYNC}}$ signal.
Brightness control	B. C.	1	Signal controlling the brightness of the entire screen. Logic: L: Low brightness H: High brightness.
Display enable	\overline{DSPE}	1	Signal controlling the display enable. Logic: L: On. H: Off


Note: Brightness control signal can be input with pulse form signal. Brightness is variable depending on the duty of pulse signal. The following table shows input conditions:

Item	Symbol	Min	Typ	Max	Unit
Period	T_B	140	167	195	μs
High brightness setting time	T_{BH}	0		T_B	μs

Recommended Electrical Conditions

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Input voltage (H-Level)	—	V_{IH}	2.4	—	—	V
Input voltage (L-Level)	—	V_{IL}	—	—	0.4	V
Input current (H-Level)	$V_{IH} = 2.75 \text{ V}, V_{CC} = 5.25 \text{ V}$	I_{IH}	—	—	20	μA
Input current (L-Level)	$V_{IH} = 0.4 \text{ V}, V_{CC} = 5.25 \text{ V}$	V_{IL}	—	—	-3.0	mA

Relationship Between Display Data and Display Dot

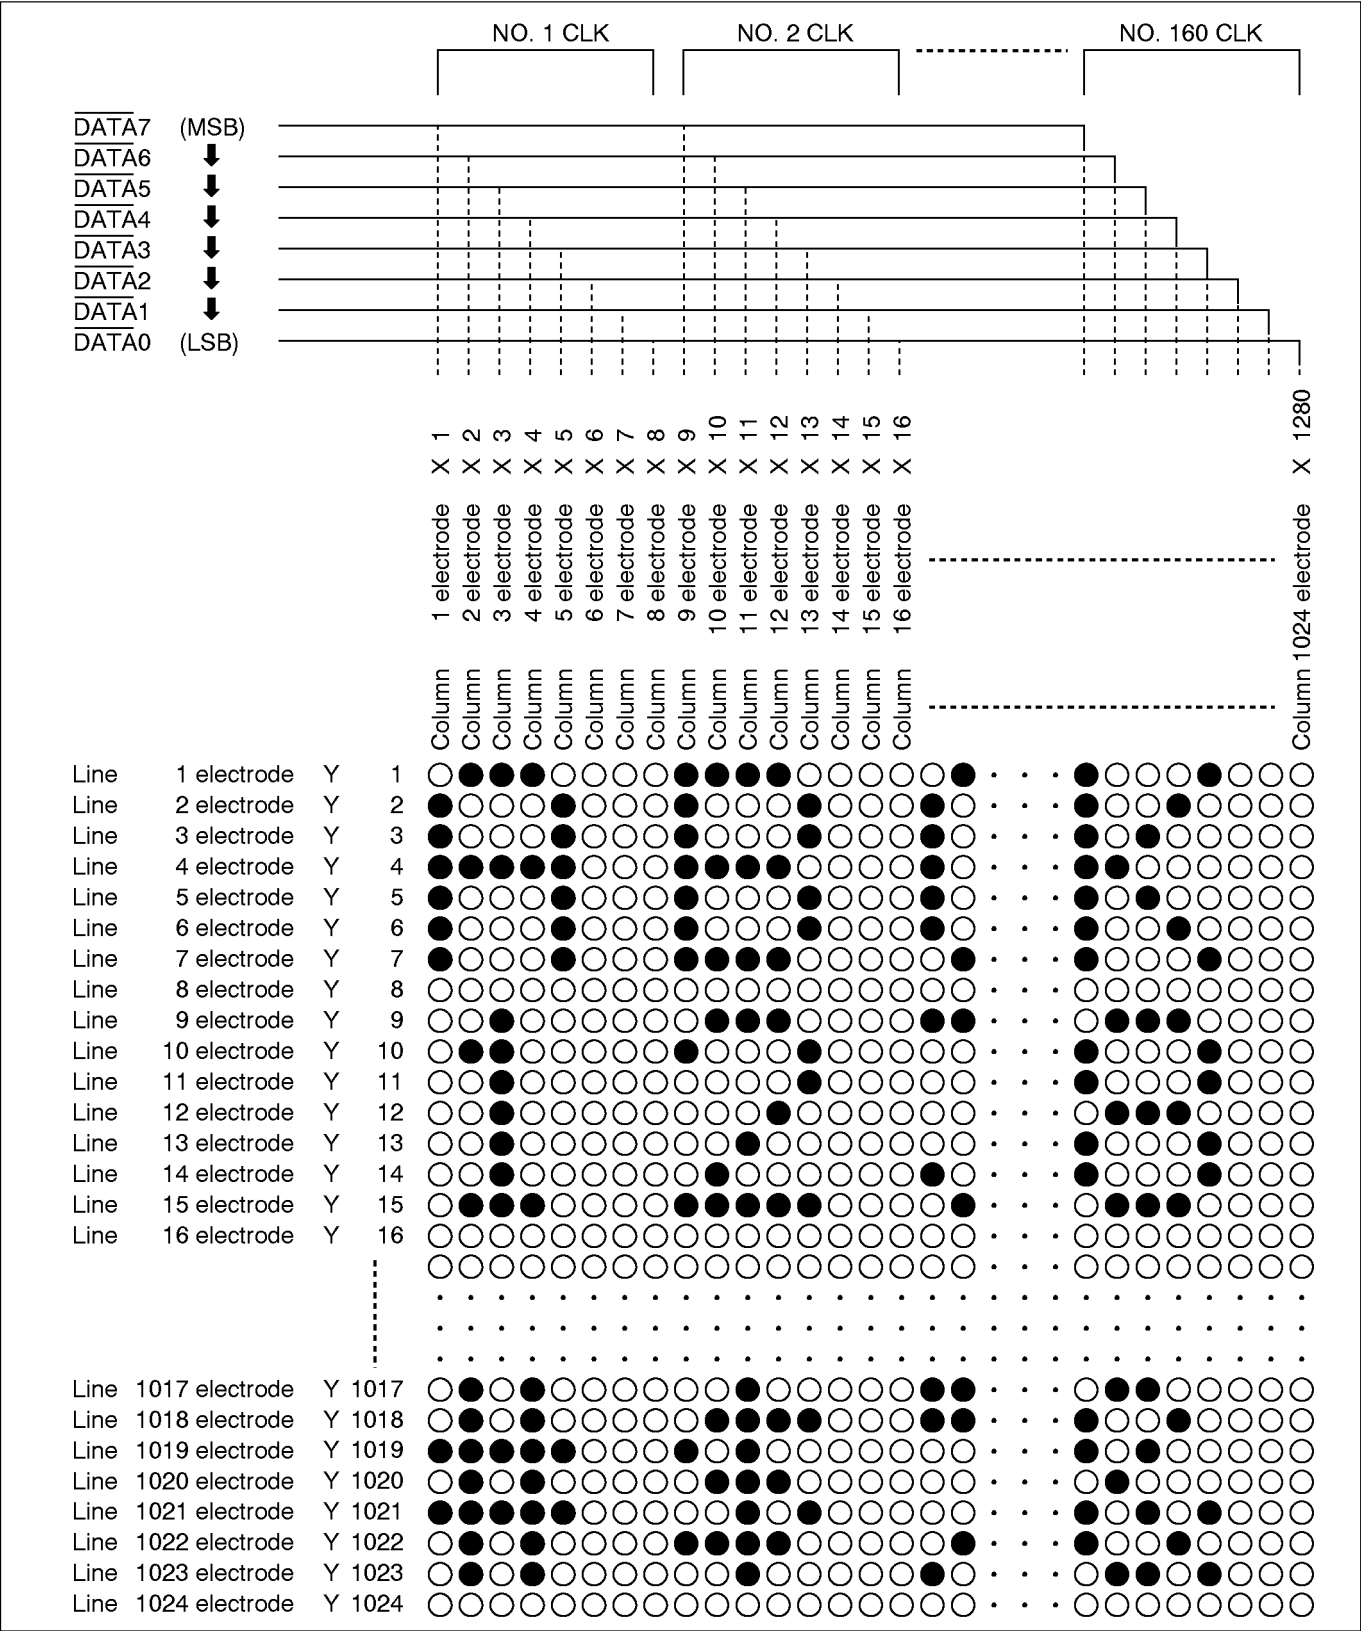


Interface Signal Timing


Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	1024	1067		H	$F_{VSYNC} = 30 \text{ Hz typical}$
t_{WV}	1	3		H	
t_{VH}	1	14		μS	
t_{HV}	2	15.25		μS	
T_{HSYNC}	30.0	31.25	45.0	μS	$F_{VSYNC} = 32 \text{ Hz typical}$
t_{WH}	1	2		μS	
t_{HC}	0.5	2		μS	
t_{CH}	0.1	2.7		μS	
t_{CLK}	166.7			ns	$F_{CLK} = 6 \text{ MHz maximum}$
t_{WCLK1}	Typ – 10%	$1/2 t_{CLK}$	Typ +10%	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ Duty = 50% typical
t_{WCLK2}	Typ – 10%	$1/2 t_{CLK}$	Typ +10%	ns	
t_{SUD}	40			ns	
t_{HD}	70			ns	

Note: Values in parenthesis () are one example of timing condition.

Interface Circuit

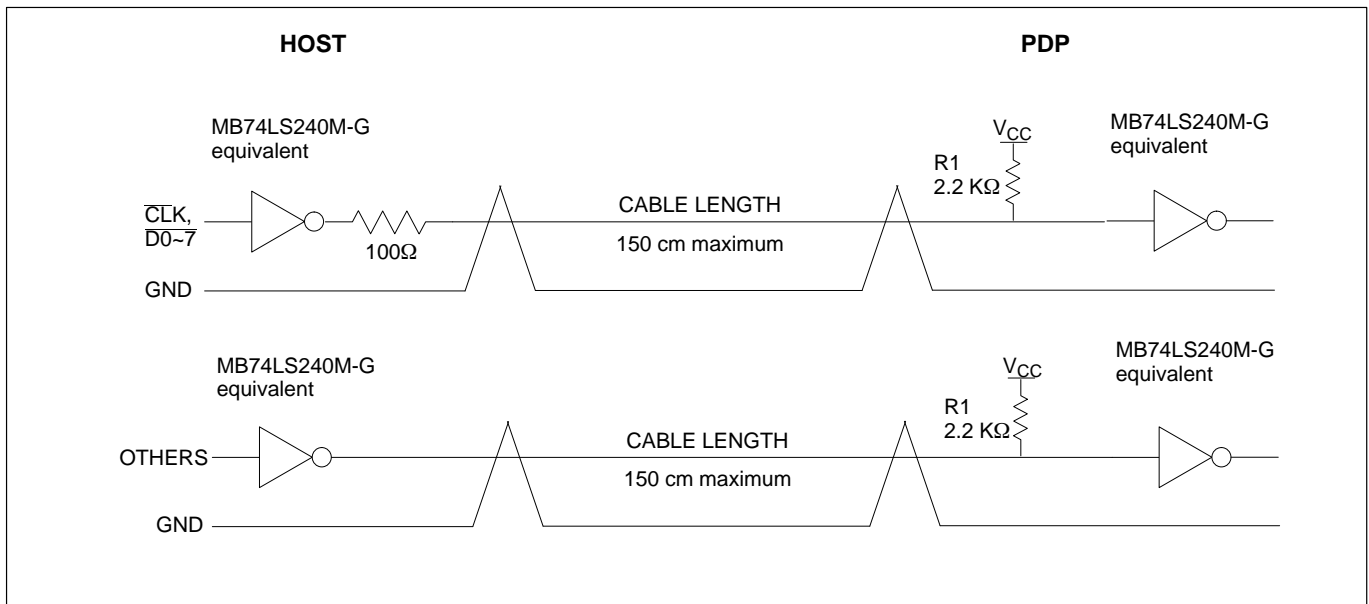

Interface Signal Timing Chart

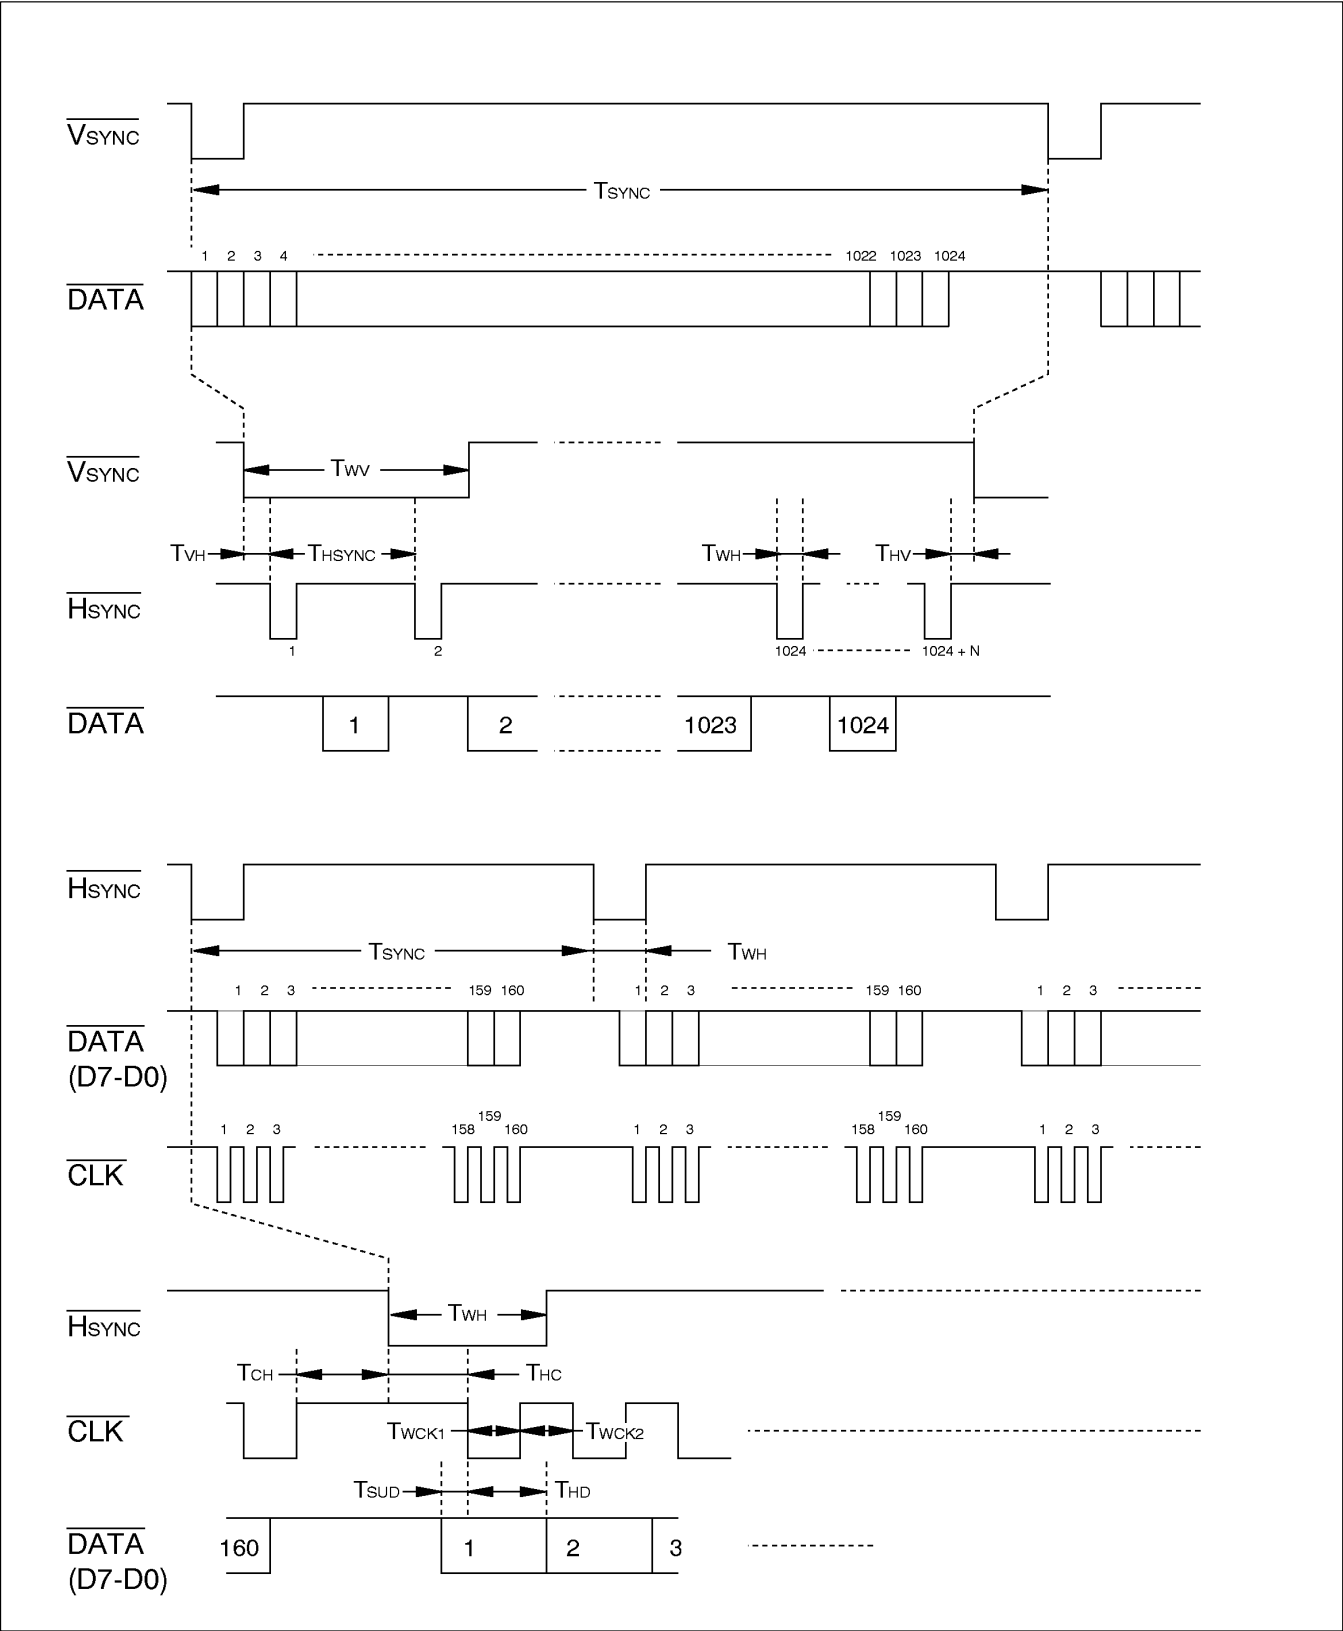


CONNECTOR PIN ASSIGNMENT

Signal Connector

P/N: HIF6-34PA-1.27DS (by Hirose)

Mating Connector: HIF6-34B-1.27R (by Hirose)

Pin No.	Signal	Pin No.	Signal	Pin No.	Signal	Pin No.	Signal
1	DATA 7	2	S. GND	19	H _{SYNC}	20	S. GND
3	DATA 6	4	S. GND	21	V _{SYNC}	22	S. GND
5	DATA 5	6	S. GND	23	DSPE	24	S. GND
7	DATA 4	8	S. GND	25	Ext B. C	26	S. GND
9	DATA 3	10	S. GND	27	Reserve	28	S. GND
11	DATA 2	12	S. GND	29	No Connection	30	S. GND
13	DATA 1	14	S. GND	31	V _{CC} (OUT)	32	S. GND
15	DATA 0	16	S. GND	33	V _{CC} (OUT)	34	S. GND
17	CLK			35	V _{CC} (OUT)		

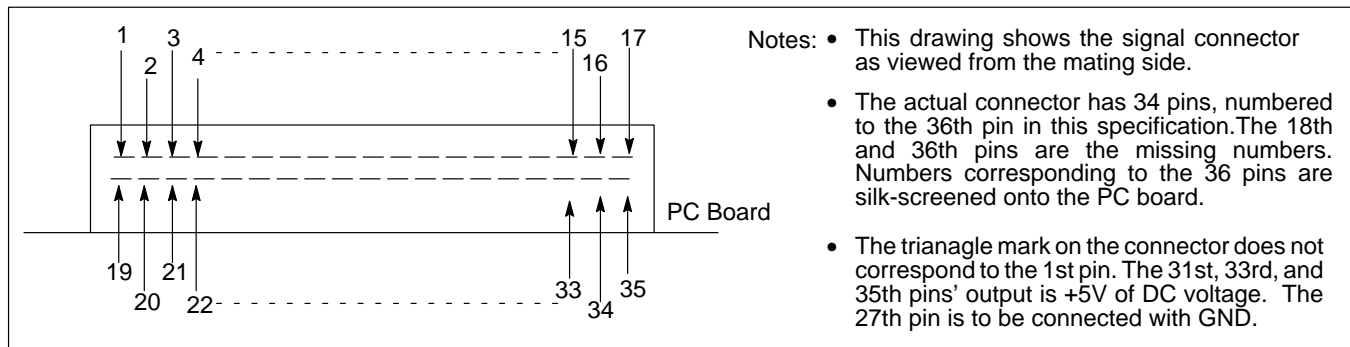

Power Supply Connector

Pin No.	Power Source Name
1	V _{CC}
2	S.GND
3	N.C
4	GND (H)
5	V _S
6	N.C.
7	N.C.
8	S.GND
9	V _R (output)

PDP side connector: FCN-815P-009TA (Fujitsu)

Mating Connector (by Fujitsu)

Housing: FCN-813J009-A

Contact: FCN-813J-T/Q (hand crimping)

FCN-813J-T/R (automatic crimping machine)


FCN-813J-T/S (hand crimping)

FCN-813J-T/T (automatic crimping machine)

Note: V_R is the reference voltage for automatic V_S setting

Relation Between Display Ratio and Brightness

In general, the increased display ratio will increase the current of the VS. This plasma display employs the automatic power controller circuit. Therefore, when the current value of V_S is set at 300 mA, the brightness decreases gradually after exceeding the display ratio of 25%. When the current is limited by the automatic power controller circuit, the brightness decreases.

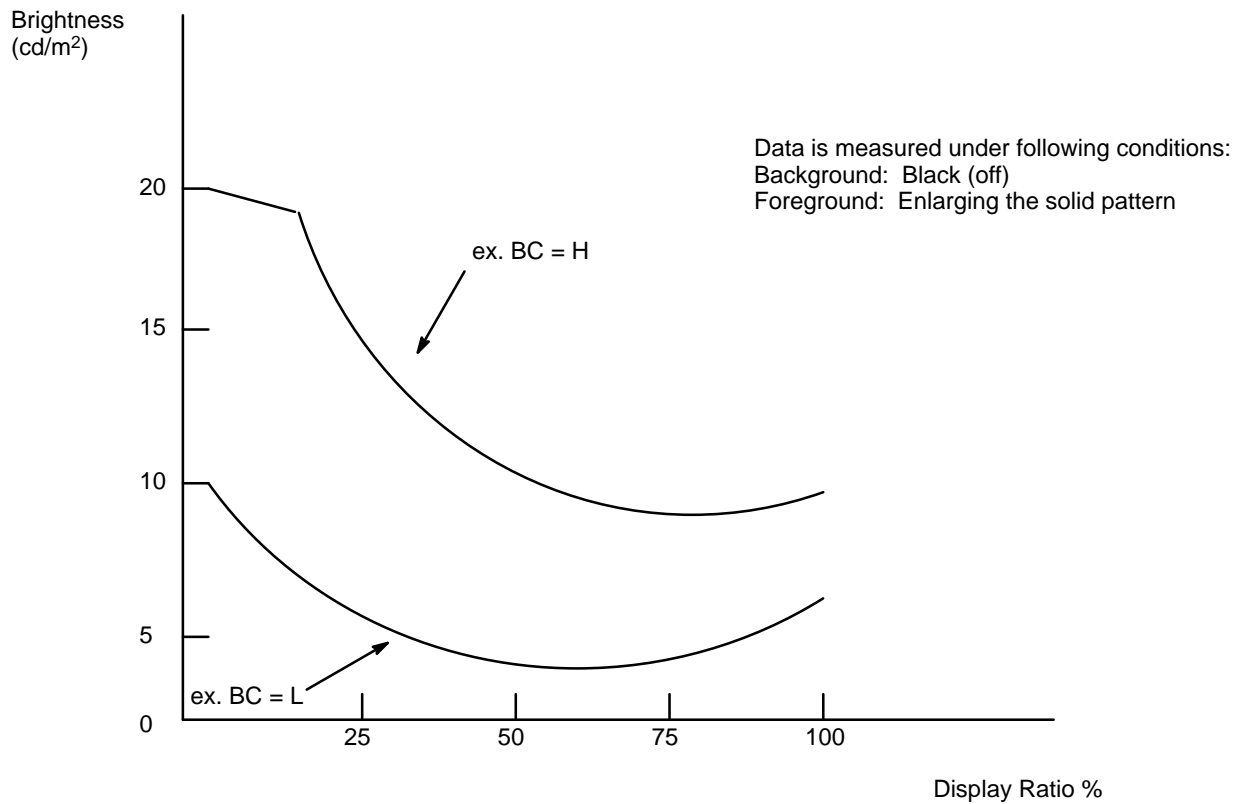


FPF160128SRUA-020


Plasma Display Graphics Unit

The FPF160128SRUA-020 plasma display graphics unit consists of an AC gas discharge plasma display panel with bistable memory and associated driver circuitry. The orange-on-black, high-contrast panel provides an easy-to-read display with no flicker or warp. The compact unit can be connected to all types of equipment with common CRT interfaces. The highly integrated drive and logic circuitry and Fujitsu's unique protective film make the FPF160128SRUA-020 a highly reliable display device.

- Bright, even, orange-on-black display
- Easy-to-use CRT interface
- Space-saving size and shape
- High reliability

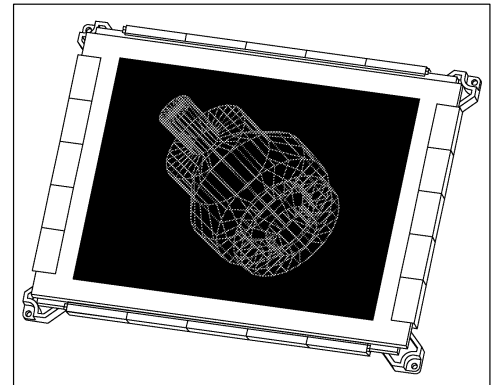

BLOCK DIAGRAM

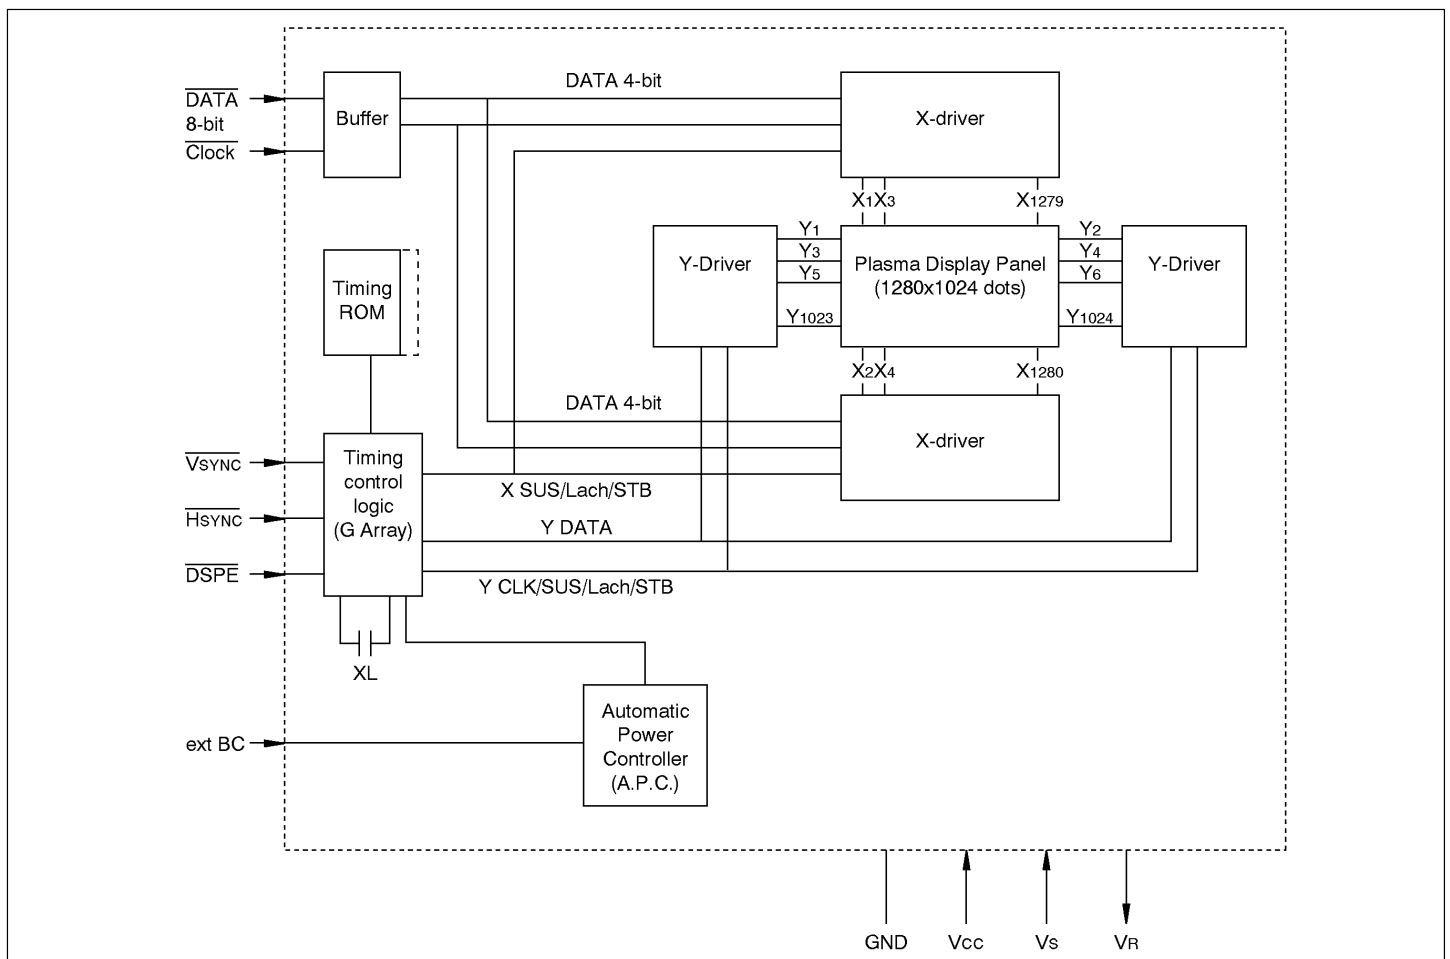

SPECIFICATIONS

Display Performance

Item	Performance
Number of Display Dots	1,310,720 dots (1280X1024 dots)
Dot Pitch	0.25 mm (0.01 in) * aspect ratio: 1:1
Dot Size	0.15 mm diameter (0.006 in)
Display Area	319.75 (H) X 255.75 (V) mm * diagonal: 16 in (12.589 X 10.069 in)
Display Color	Neon Orange
Brightness	35 cd/m ₂ (Typ) 27 cd/m ₂ (Min) Plane average of solid pattern in 8X8 dots area Display ratio: up to 25% HSYNC = 60.00 μ s Is = 500 mA
Brightness Unevenness	40% max (20% max in each 10 mm distant area)
Contrast Ratio	1:20 min
Maximum Viewing Angle	140° (Typ)
Defective Dots	<u>Total 30 dots max</u> 2 adjacent dots: 6 portion max 3 adjacent dots: 0 portion 3 dots max in any 32 X 32 dots area (including flickering dots)

Environmental Conditions

Item	Rating
Operating temperature	0 to +40° C
Operating humidity	20 to 80% RH (no condensation)
Storage temperature	-20 to +70°C
Storage humidity	20 to 80% RH (no condensation)
Atmospheric pressure	700 to 1114 hPa

MECHANICAL SPECIFICATIONS

Physical Specifications

Item	Specification
Dimension (H) X (W) X (D)	See Fig 2 307 X 387 X 34 mm
Weight	3.3 kg (max)

Electrical Characteristics


Item	Symbol	Voltage	Stability (Max)	Ripple (Max)	Current (Max)
Logic	V_{CC}	+5%	$\pm 5\%$	100mV _{pp}	0.3A
Sustain driver	V_S	+88 to 100.5 V	$\pm 0.5\%$	500mV _{pp}	Set value \pm 30mA
V_S Reference	V_S	Set Value	$\pm 0.05V$	500mV _{pp}	10mA

Notes: 1) Current for sustain driver (V_S) is specified by set value of Automatic Poer Controler (A.P.C.). Typical set value is 300 mA.
 2) For the V_S voltage setting, the plasma display unsit outputs the reference voltage V_S .

Absolute Maximum Ratings

Item	Symbol	Rating
Supply voltage for logic	V_{CC}	+ 7 V
Supply voltage for sustain	V_S	+120 V

External Dimensions

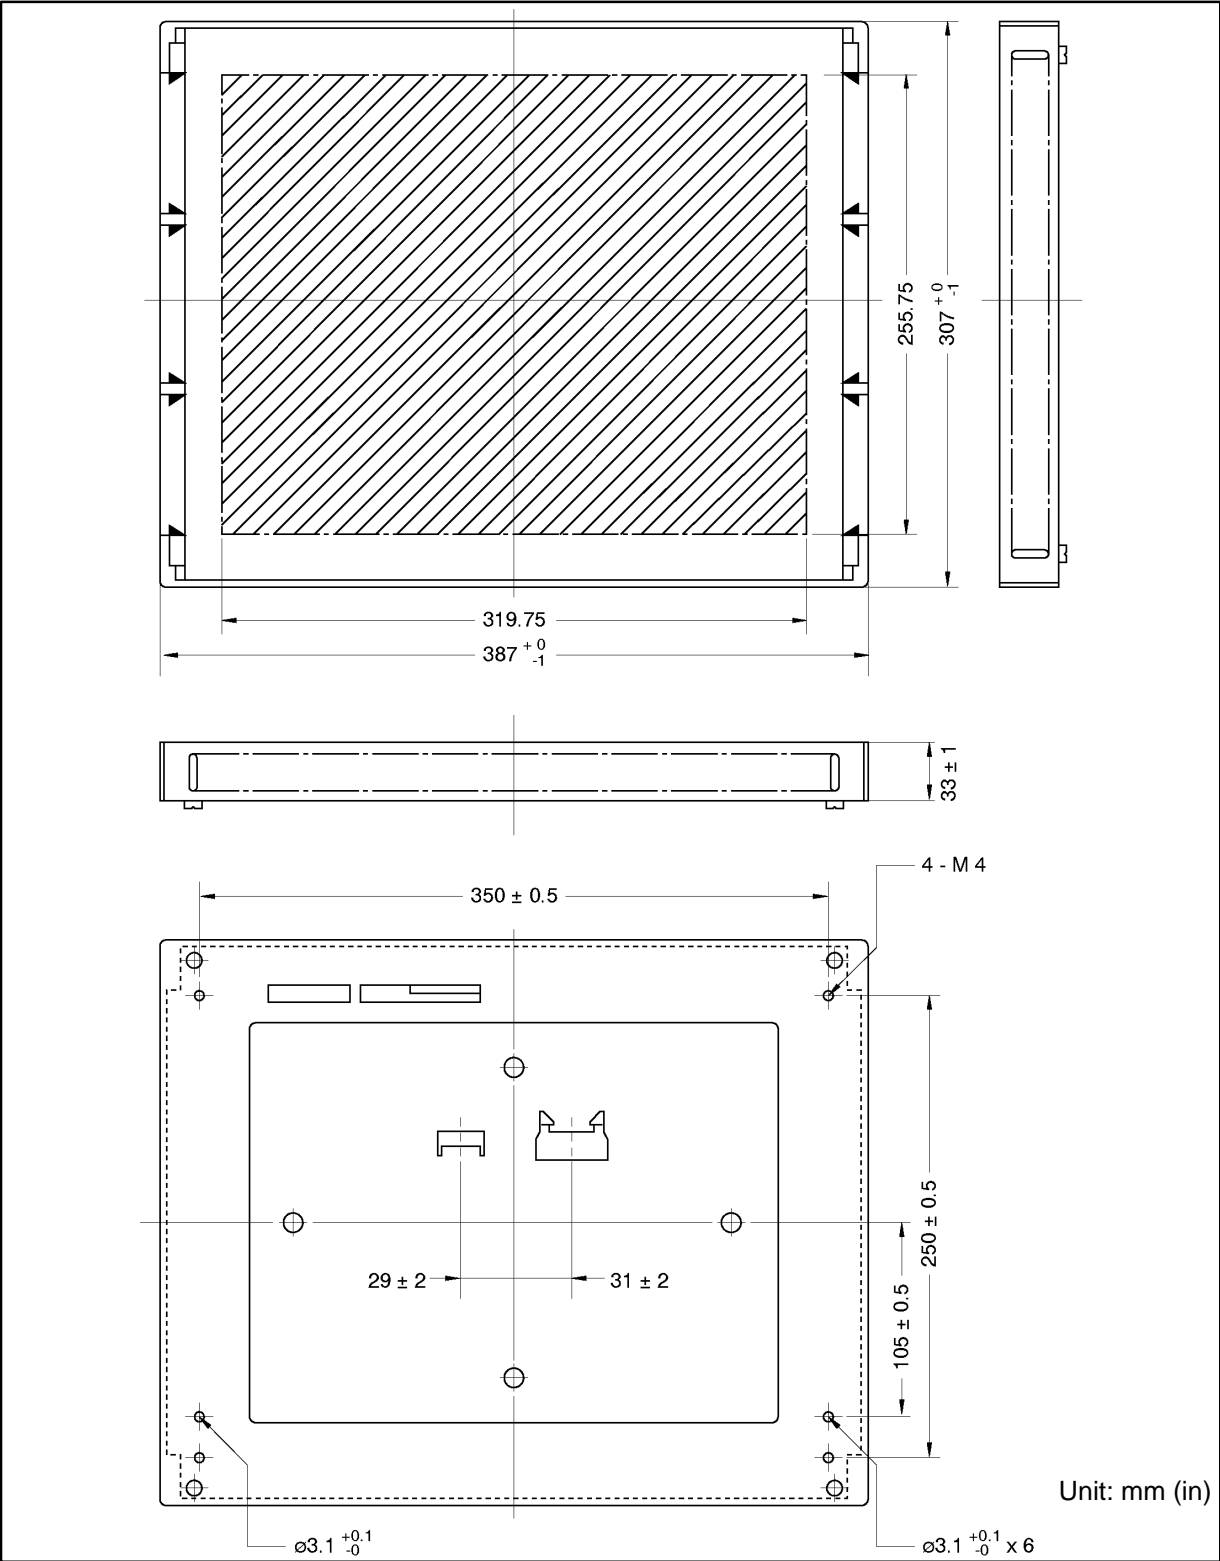

INTERFACE SIGNALS


Type of Signals

Signal	Symbol	Data Line	Description
Display Data	$\overline{D0} \sim \overline{D7}$	8	8-bit parallel display data. Logic: L: On, H: Off Figure 3 shows the relation between data $\overline{D0} \sim \overline{D7}$ and display postion.
Clock	\overline{CLK}	1	Signal controlling the input of timing of display data. Display data are input at falling edge of \overline{CLK} and transferred in sequence. Number of signals in one $\overline{H_{SYNC}}$ period is 160.
Horizontal Synchronous	$\overline{H_{SYNC}}$	1	Signal controlling the scanning timing and display time of each line electrode. Address incremeent to the next line is done at the falling edge of $\overline{H_{SYNC}}$. The number of signals in one $\overline{V_{SYNC}}$ period is required to beat 1024 or more. And a continuous signal is required.
Vertical Synchronous	$\overline{V_{SYNC}}$	1	Signal controlling the refresh speed of the screen. The scanning position returns to the first electrode at the falling edge of the $\overline{V_{SYNC}}$ signal.
Brightness Control	B. C.	1	Signal controlling the brightness of the entire screen. Logic: L: Low brightness H: High brightness.
Display Enable	\overline{DSPE}	1	Signal controlling the display enable. Logic: L: On. H: Off

Recommended Electrical Conditions

Item	Condition	Symbol	Min.	Typ.	Max.	Unit
Input Voltage (H-Level)	—	V_{IH}	2.4	—	—	V
Input Voltage (L-Level)	—	V_{IL}	—	—	0.4	V
Input Current (H-Level)	$V_{IH} = 2.75 \text{ V}, V_{CC} = 5.25 \text{ V}$	I_{IH}	—	—	20	μA
Input Current (L-Level)	$V_{IL} = 0.4 \text{ V}, V_{CC} = 5.25 \text{ V}$	I_{IL}	—	—	-3.0	mA

Relationship Between Display Data and Display Dot

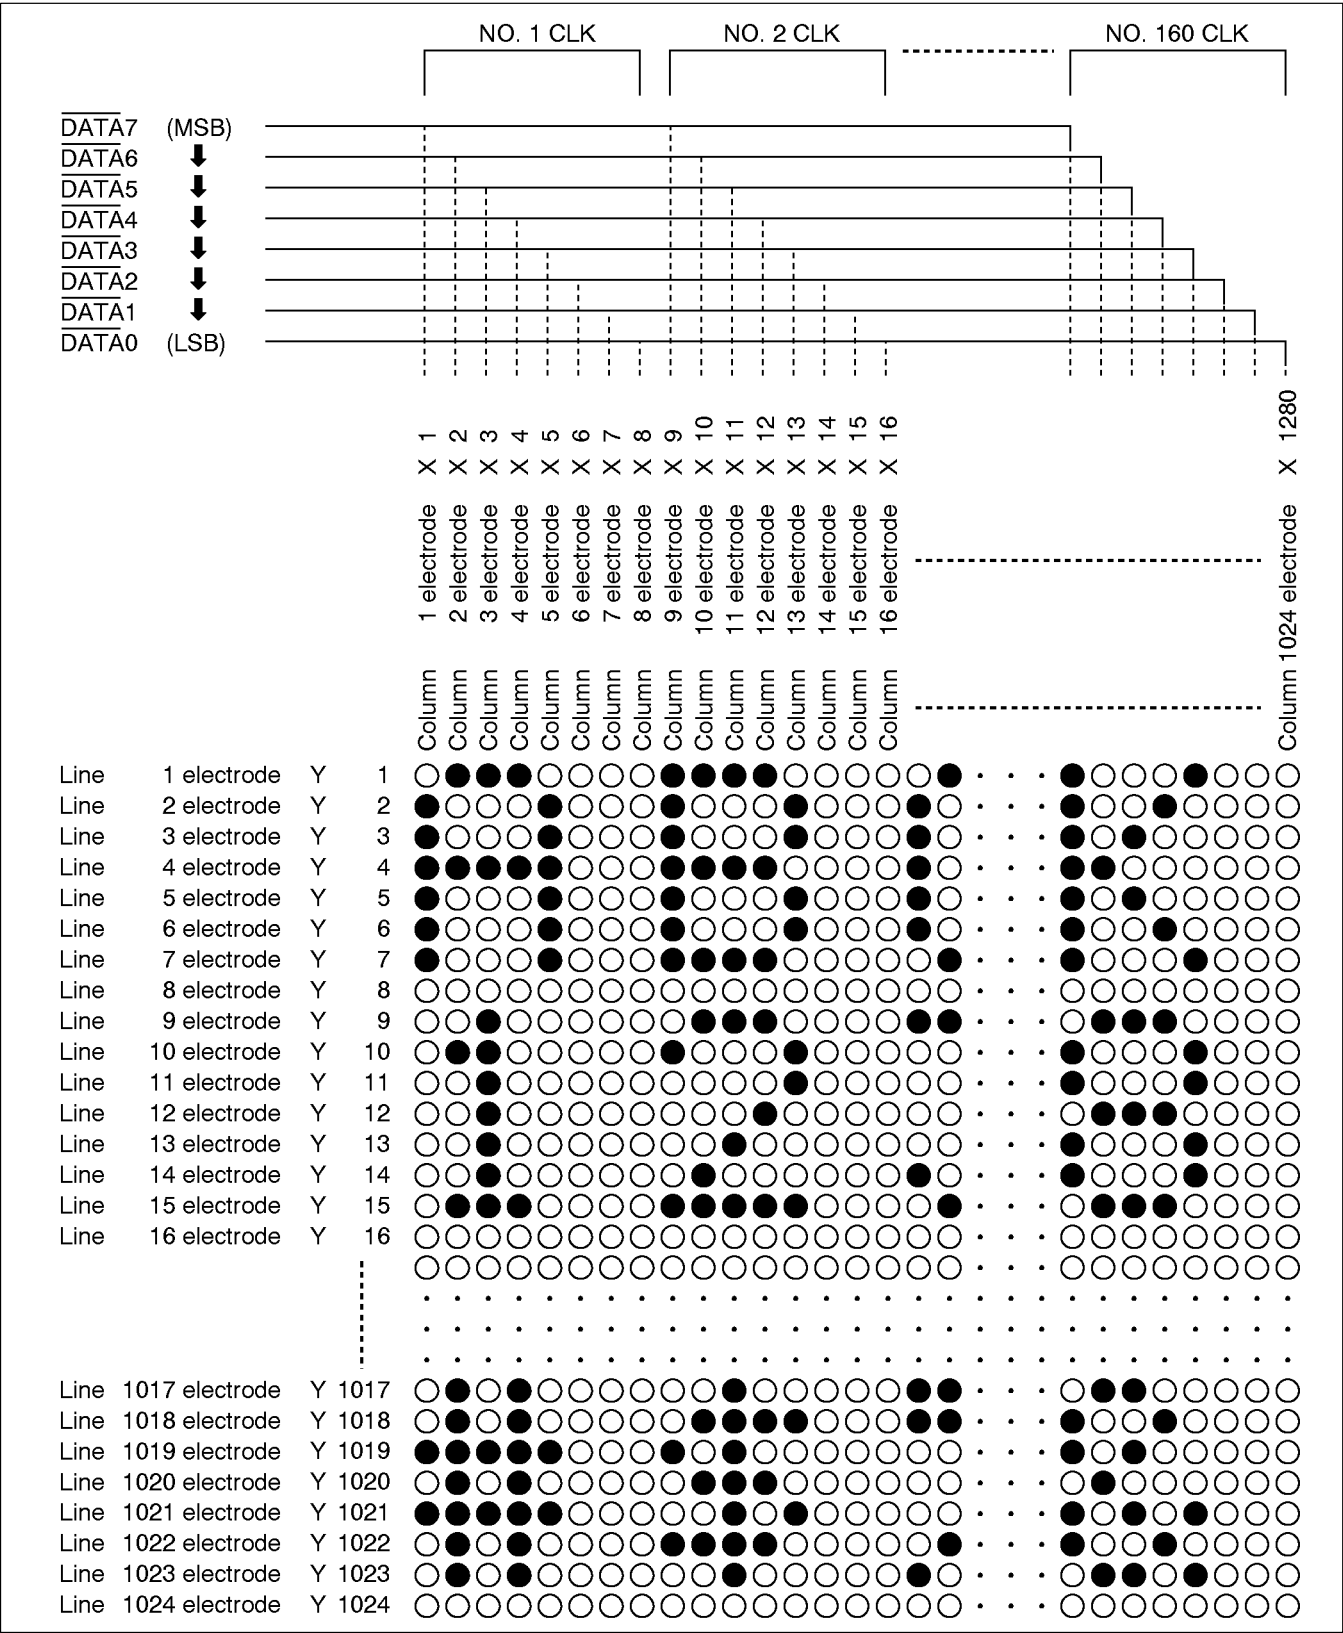


Interface Signal Timing


Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	1024	1067		H	$F_{VSYNC} = 16 \text{ Hz (Typ.)}$
t_{WV}	1	3		H	
t_{VH}	1	14		μs	
t_{HV}	2	15.25		μs	
T_{HSYNC}	58.8	60.0	61.2	μs	
t_{WH}	1	2.7		μs	
t_{HC}	0.5	3.5		μs	
t_{CH}	0.1	3.5		μs	
t_{CLK}	166.7	333.3		ns	$F_{CLK} = 3 \text{ MHz (Max.)}$
t_{WCLK1}	Typ - 10%	1/2 t_{CLK}	Typ +10%	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ Duty = 50% (Typ.)
t_{WCLK2}	Typ - 10%	1/2 t_{CLK}	Typ +10%	ns	
t_{SUD}	40			ns	
t_{HD}	70			ns	

Note: Values in parenthesis () are the one example of timing condition.

Interface Circuit

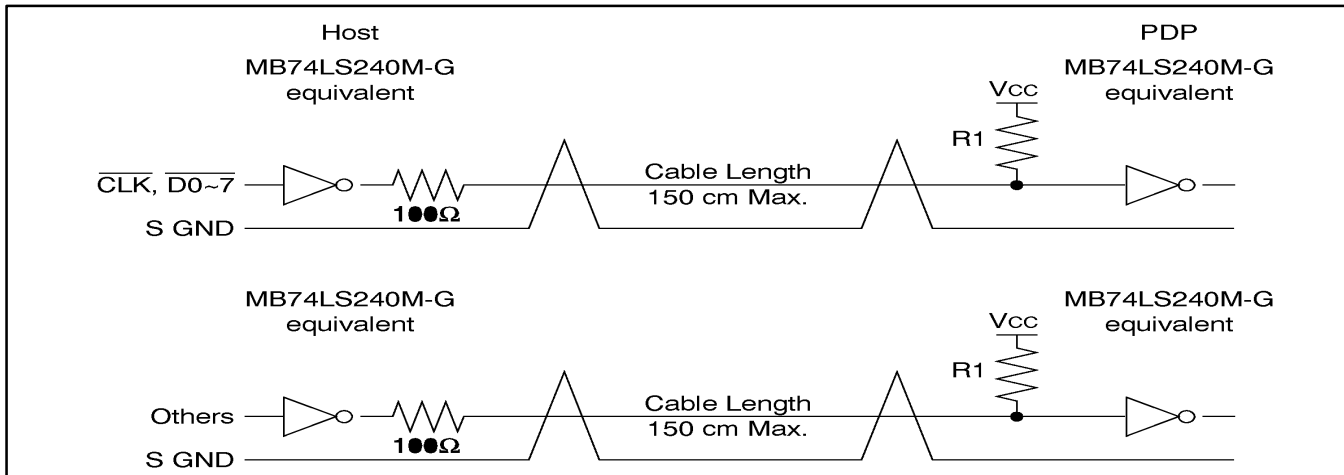

Interface Signal Timing Chart

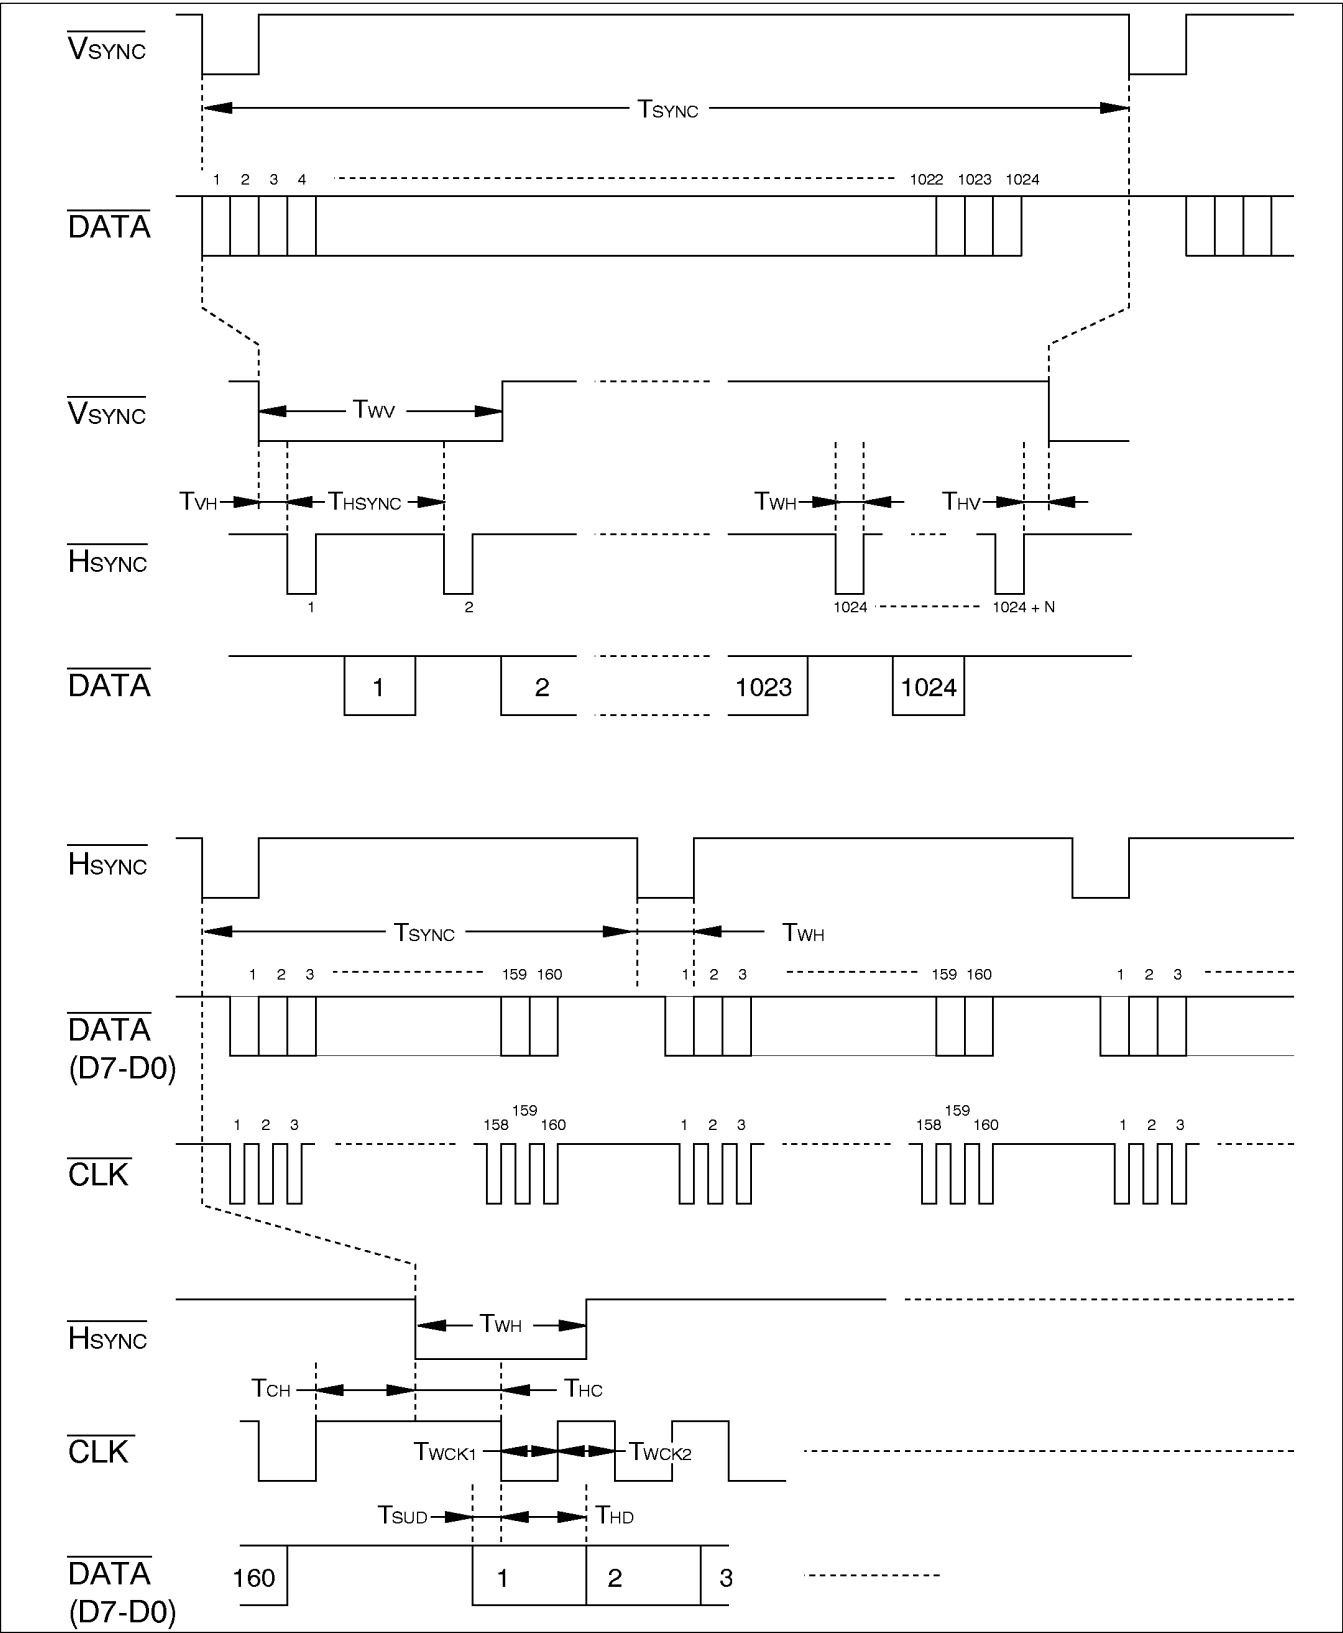


CONNECTOR PIN ASSIGNMENT

Signal Connector

P/N:HIF6-34PA-1.27DS (by Hirose)

Mating Connector: HIF6-34B-1.27R (by Hirose)

Pin No.	Signal	Pin No.	Signal	Pin No.	Signal	Pin No.	Signal
1	DATA 7	2	S. GND	19	H _{SYNC}	20	S. GND
3	DATA 6	4	S. GND	21	V _{SYNC}	22	S. GND
5	DATA 5	6	S. GND	23	DSPE	24	S. GND
7	DATA 4	8	S. GND	25	Ext B. C	26	S. GND
9	DATA 3	10	S. GND	27	Reserve	28	S. GND
11	DATA 2	12	S. GND	29	No Connection	30	S. GND
13	DATA 1	14	S. GND	31	V _{CC} (OUT)	32	S. GND
15	DATA 0	16	S. GND	33	V _{CC} (OUT)	34	S. GND
17	CLK			35	V _{CC} (OUT)		

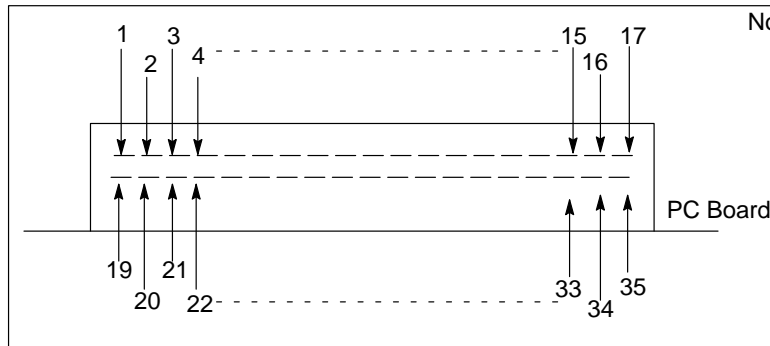

- Notes: 1) This drawing shows the signal connector which is viewed from the mating side.
2) The actual connector has 34 pins, the numbering is to the 36th pin in this specification. The 18th and 36th pins are the missing numbers. On the PC board the numbers which is equivalent to 36 pins are printed with silk printing
3) The triangle mark on the connector is not corresponding to the 1st pin. The 31st, 33rd, and 35th pins output is +5 V of DC voltage. The 27th pin is to be connected with GND.

Power Supply Connector

PDP Side Connector: FCN-815P-009TA (by Fujitsu)

Pin No.	Power Source Name
1	V _{cc}
2	S. GND
3	N. C.
4	GND (H)
5	V _s
6	N. C.
7	N. C.
8	S. GND
9	VR (output)

Mating Connector (by Fujitsu)


Housing: FCN-813J009-A

Contact: FCN-813J-T/Q (hand crimping)

FCN-813J-T/S (hand crimping)


FCN-813J-T/R (automatic crimping machine) FCN-813J-T/T (automatic crimping machine)

External Dimensions

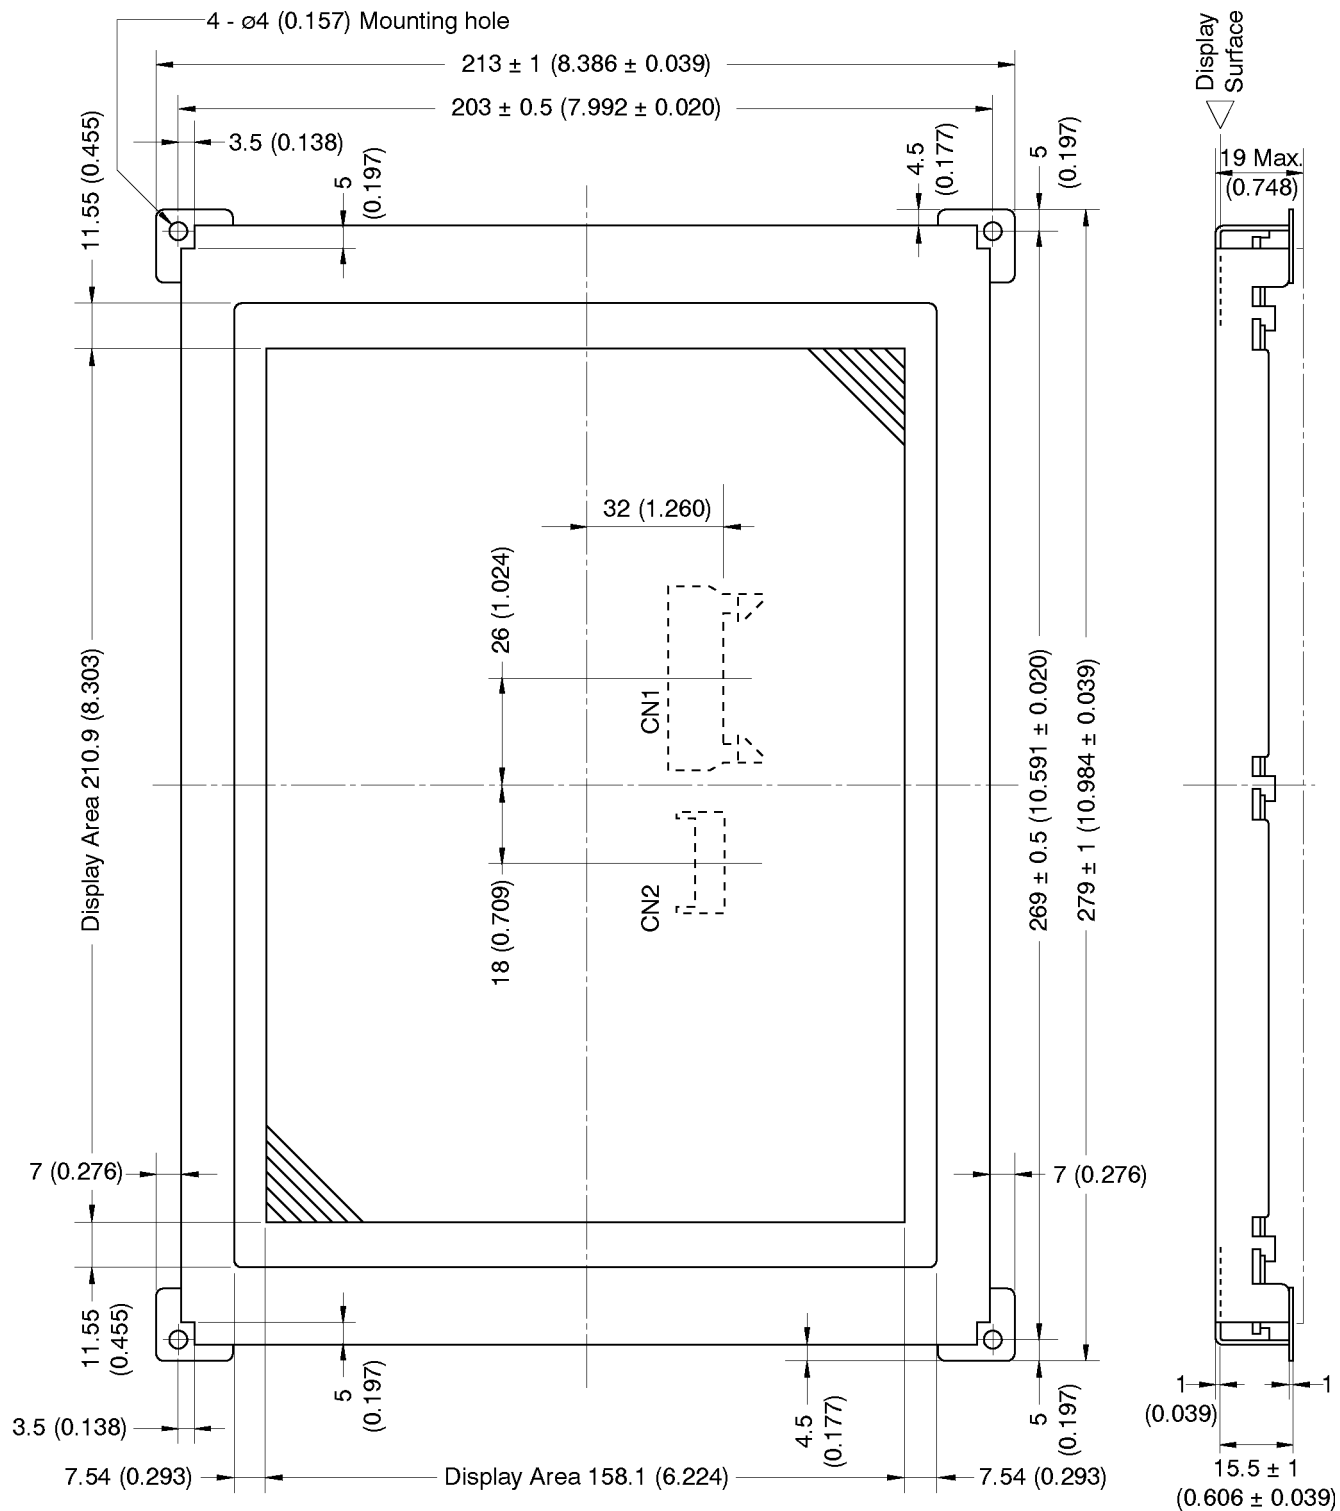

Relation Between Display Ratio and Brightness

In general, the increased display ratio will increase the current of the VS. This plasma display is employing the Automatic Power Controller Circuit. Therefore, when the current value of Vs is set at 300 mA, the brightness will decrease gradually after exceeding the display ratio of 25%. When the current is limited by Automatic Power Controller Circuit, the brightness decreases.

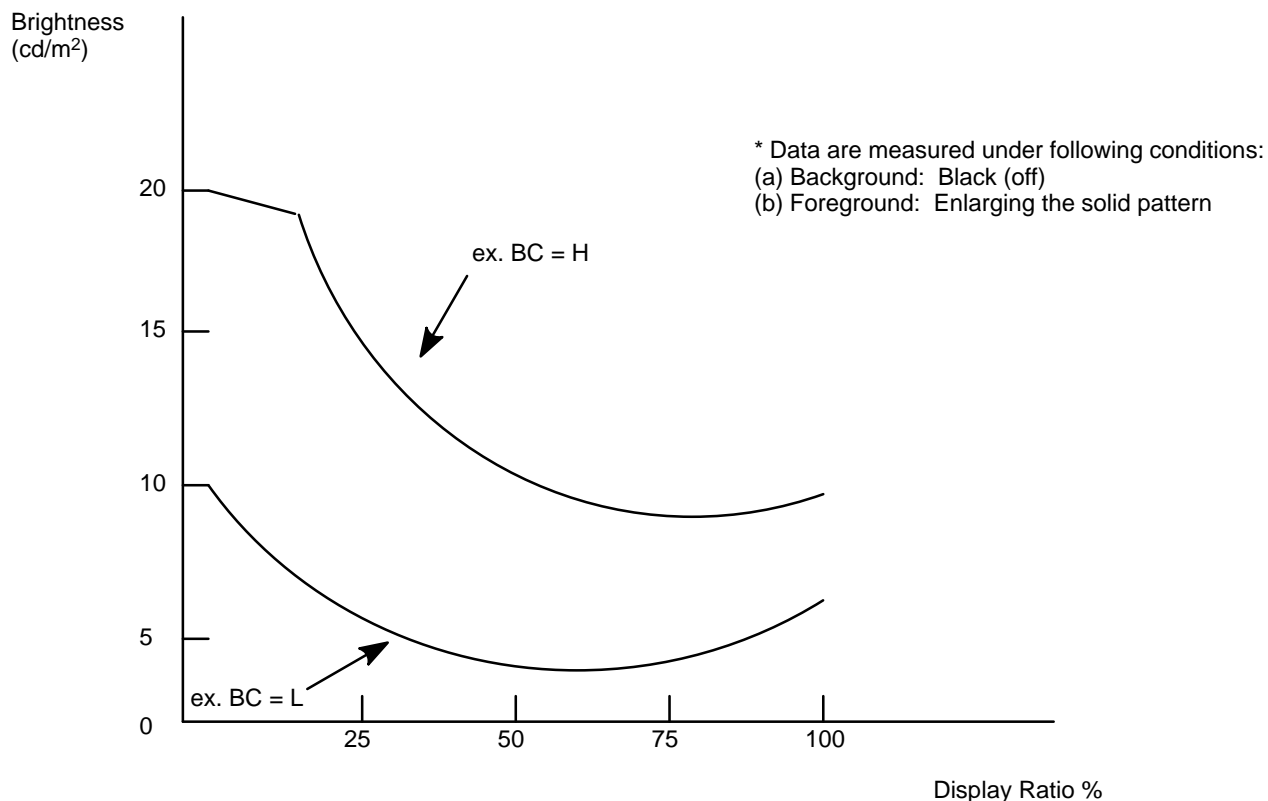


Graphic Type Stand-alone Units (units plus power supplies plus enclosure) — *At a Glance*

Device	Page
FPF12000SA	7-3
FPF20000S-501	7-11
FPF20000S-601	7-21


FPF12000SA
Plasma Display Graphics Unit

The Fujitsu FPF12000SA plasma display has a low-profile standalone structure. It can be used in a wide variety of office automation systems as a space-saving display or a wall-type display.

- Bright, flickering-free display
- 1024 x 768 dot high-resolution graphic display
- Small, thin, low power
- Combinations to CRT interface
- Keyboard connection terminal
- 100 VAC single power supply
- Wal-type display (metal hook optional)

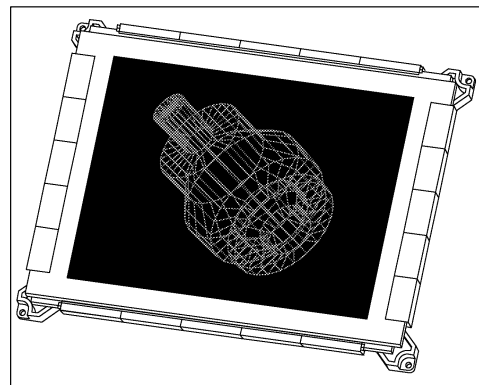

BLOCK DIAGRAM

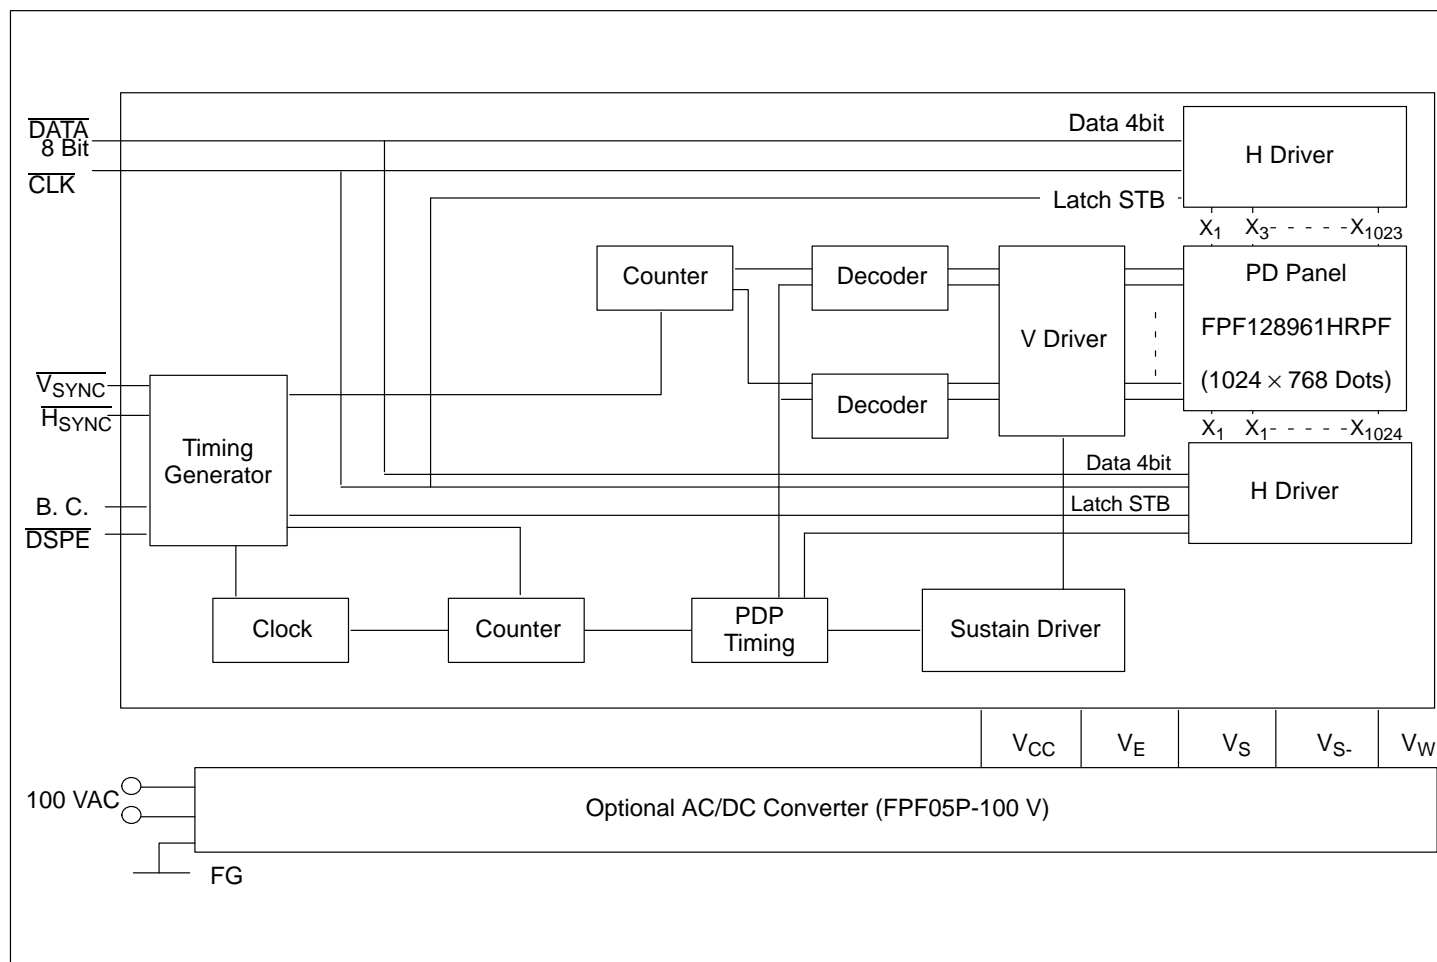

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Maximum Ratings
Input Power Voltage	AC IN	135 VAC
Input Signal Voltage	V_1	-0.5 V to +5.5 V

DC Characteristics

Input voltage (Level H)	V_{IH}	2.4	—	—	V
Input voltage (Level L)	V_{IL}	—	—	0.4	V
Input current (Level H) ($V_{IH} = 2.75$ V $V_{CC} = 5.25$ V)	I_{IH}	—	—	20	μ A
Input current (Level L) ($V_{IH} = 0.4$ V $V_{CC} = 5.25$ V)	I_{IL}	—	—	-16	mA
Input voltage (Speaker input (p-p))				0.7	V
Speaker input fre- quency		0.4		5	kHz

MECHANICAL SPECIFICATIONS


Physical Specifications

Item	Specification
Display Panel	FPF12896HRPF
Number of Display Dots	1024 (H) x 768 (V) dots (786,432 dots)
Dot Pitch	0.3 (H) X 0.3 (V) (0.012 X 0.012 in)
Dot Size	Approximately 0.2 mm (0.008 in)
Screen Size	307 x 230 mm (12.087 x 9.055 in)
Display Color	Neon Orange
Dot Brightness	5 cd/m ² min (with filter, average)
Brightness Unevenness	Up to 50%
Contrast ratio	20:1 min
Viewing angle	120° min
Weight	Approximately 5Kg
External Dimensions	See External Dimensions Figure

Performance Specifications

Item	Rating
Operating Temperature	5 to +35°C
Storage Temperature	−10 to +50°C
Humidity	20 to 80% RH (no condensation)
Atmospheric Pressure Durability	700 to 1114 hPa
Vibration	Operation: 0.2 G (3–60 Hz sine wave, double sweep time: 2 minutes Non–Operation: 0.4G

External Dimensions

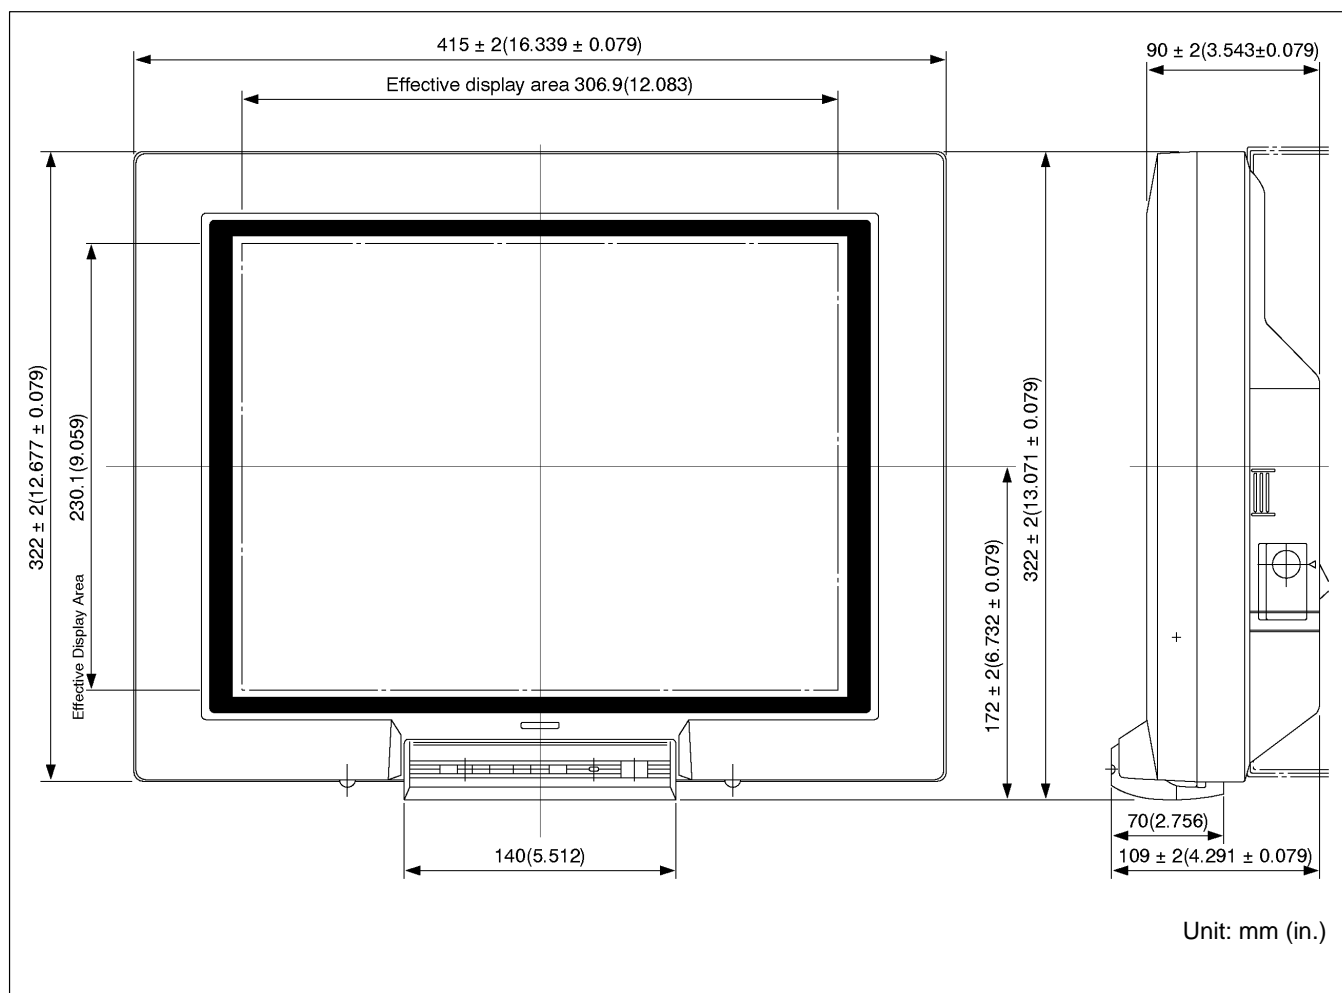


INTERFACE SIGNALS

Type of Signals (TTL)

Signal	Symbol	Number of Lines	Definition and Function
Data	$\overline{\text{DATA0 to 7}}$	0	Display data signal Logic L: On, H: Off The relationship between $\overline{\text{DATA0 to 7}}$ and display location is shown in the following figure.
Clock	$\overline{\text{CLK}}$	1	The display data transfer signal fetches and transfers data sequentially at the falling edge. The number of clock signals during one $\overline{\text{H}_{\text{SYNC}}}$ cycle is 128.
Line Synchronous	$\overline{\text{H}_{\text{SYNC}}}$	1	The signal which controls the period of the display. When this signal is at the falling edge, the address increments to the next line-electrode. The number of $\overline{\text{H}_{\text{SYNC}}}$ signals per $\overline{\text{V}_{\text{SYNC}}}$ cycle is 769 and must be generated at regular intervals.
Frame Synchronous	$\overline{\text{V}_{\text{SYNC}}}$	1	This signal controls the start of screen. When this signal is at the falling edge, the address increments to the first column electrode.
Display Enable	$\overline{\text{DSPE}}$	1	This signal enables or disables display. Logic L: On, H: Off
Speaker	$\overline{\text{AUDIO}}$	1	Speaker sound control signal
Keyboard	$\overline{\text{RDKB}}$ $\overline{\text{TDKB}}$	2	The signal which controls the keyboard connected to the main unit.
Power Control	$\overline{\text{ON1B}}$ $\overline{\text{ON1M}}$ $\overline{\text{ON2M}}$ $\overline{\text{ON2}}$	4	The signal which controls the CPU power switch. (Usually) Jumpered between $\overline{\text{ON1B}}$ and GND and between $\overline{\text{ON2M}}$ and $\overline{\text{ON2}}$ and open for others
LED Lamp	$\overline{\text{RDY}}$	1	The signal which is turned on by switching on the CPU power.


Relationship Between Display Data and Display Dot

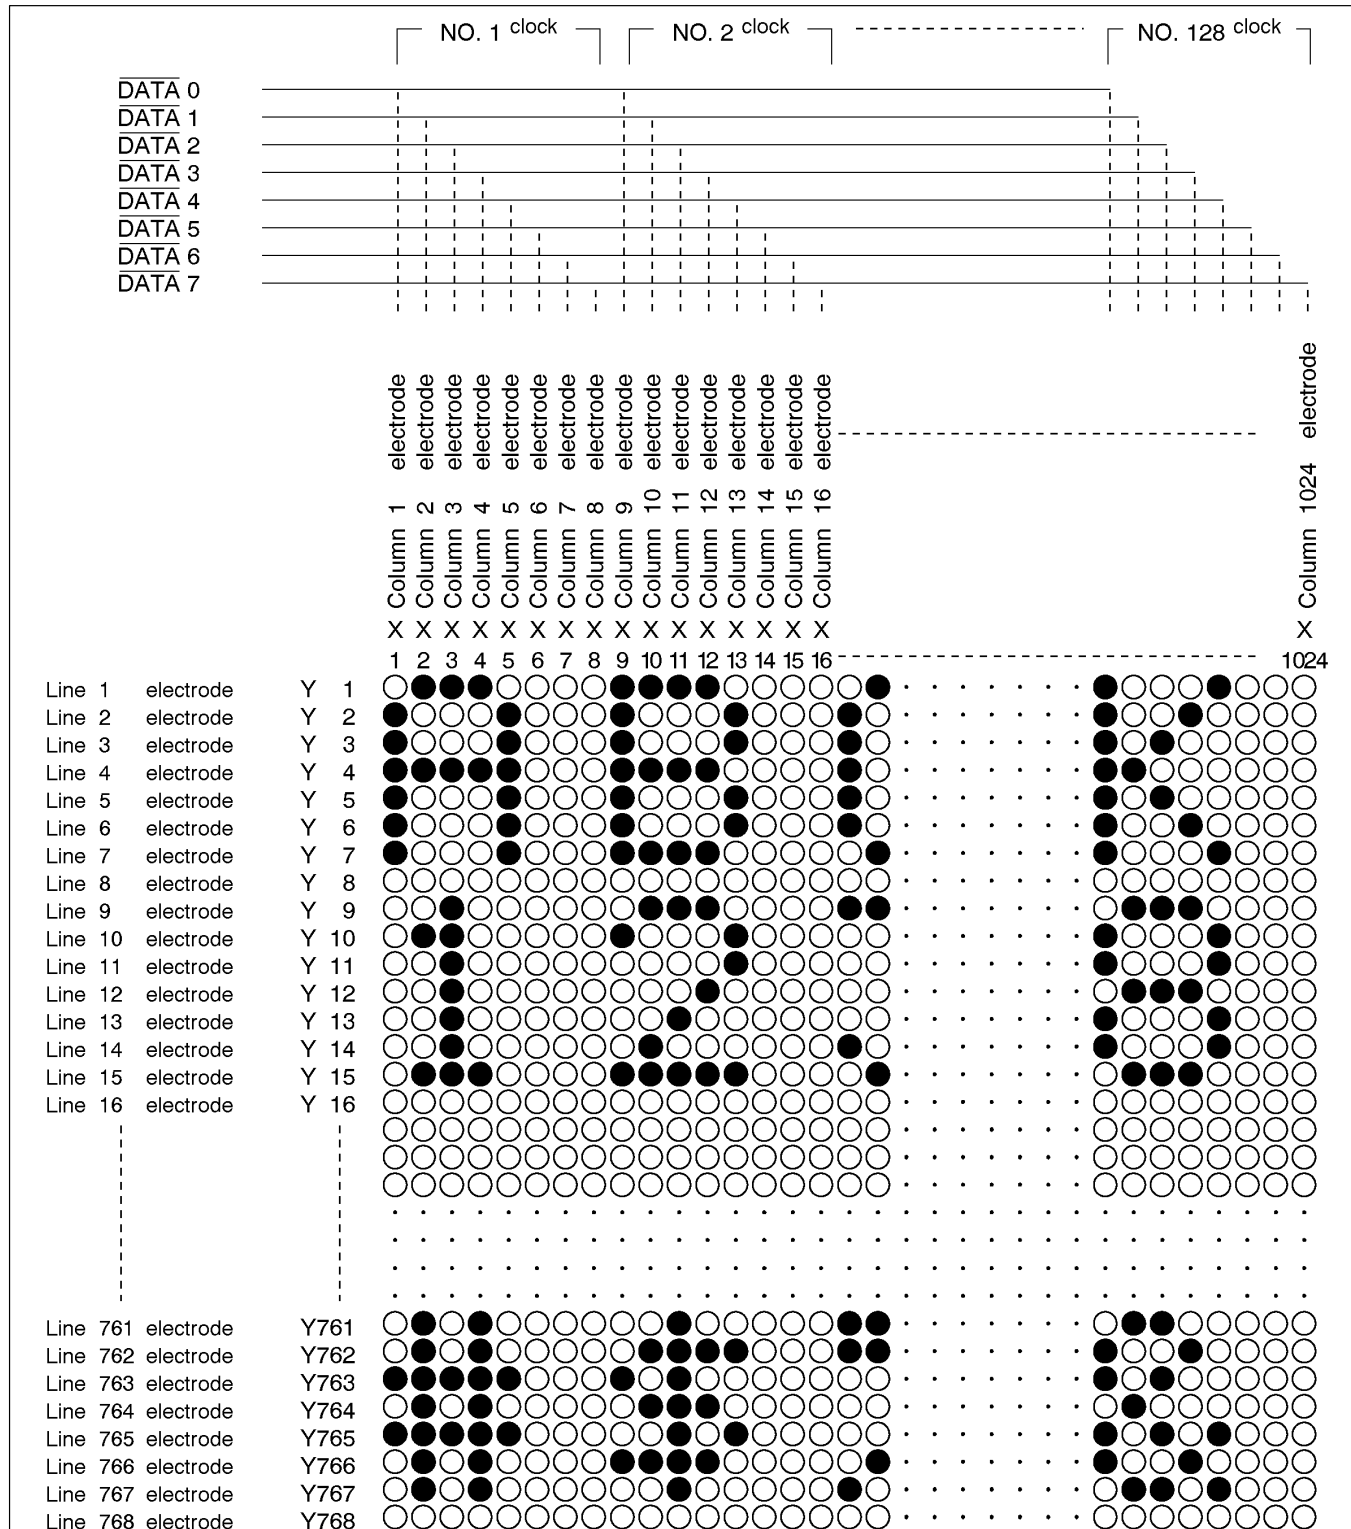


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit	Remarks
T _{VSYNC}	61.44	61.74	–	ms	F _{VSYNC} = 16 Hz (Typ.)
t _{WV}	2	160		μs	
t _{VH}	1	75		μs	
t _{HV}	5	5.4		μs	
T _{HSYNC}		79.56		μs	±1%
t _{WH}	2	5.4		μs	
t _{KC}	5	16.74		μs	
t _{CH}	11.7	8		μs	
t _{CLK}	300	360		ns	F _{CLK} = 2.8 MHz (Standard)
t _{WCLK1}	150	180		ns	t _{WCLK1} + t _{WCLK2} = T _{CLK} Duty Cycle = 50% (Standard)
t _{WCLK2}	150	250		ns	
t _{SUD}	100	180		ns	
t _{HD}	80	135		ns	

Interface Circuit

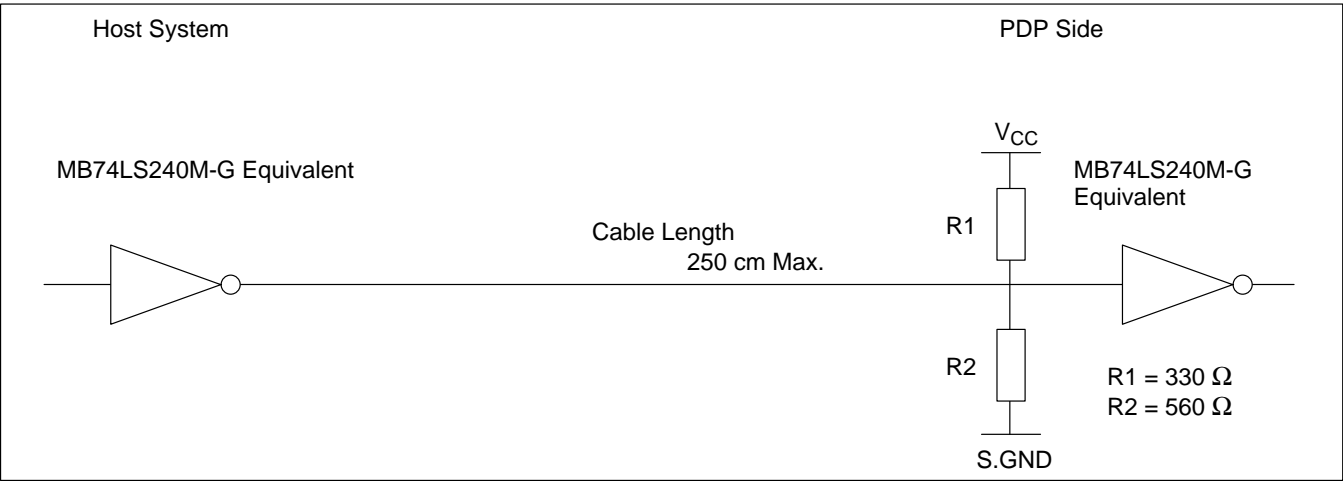

Interface Signal Timing Chart

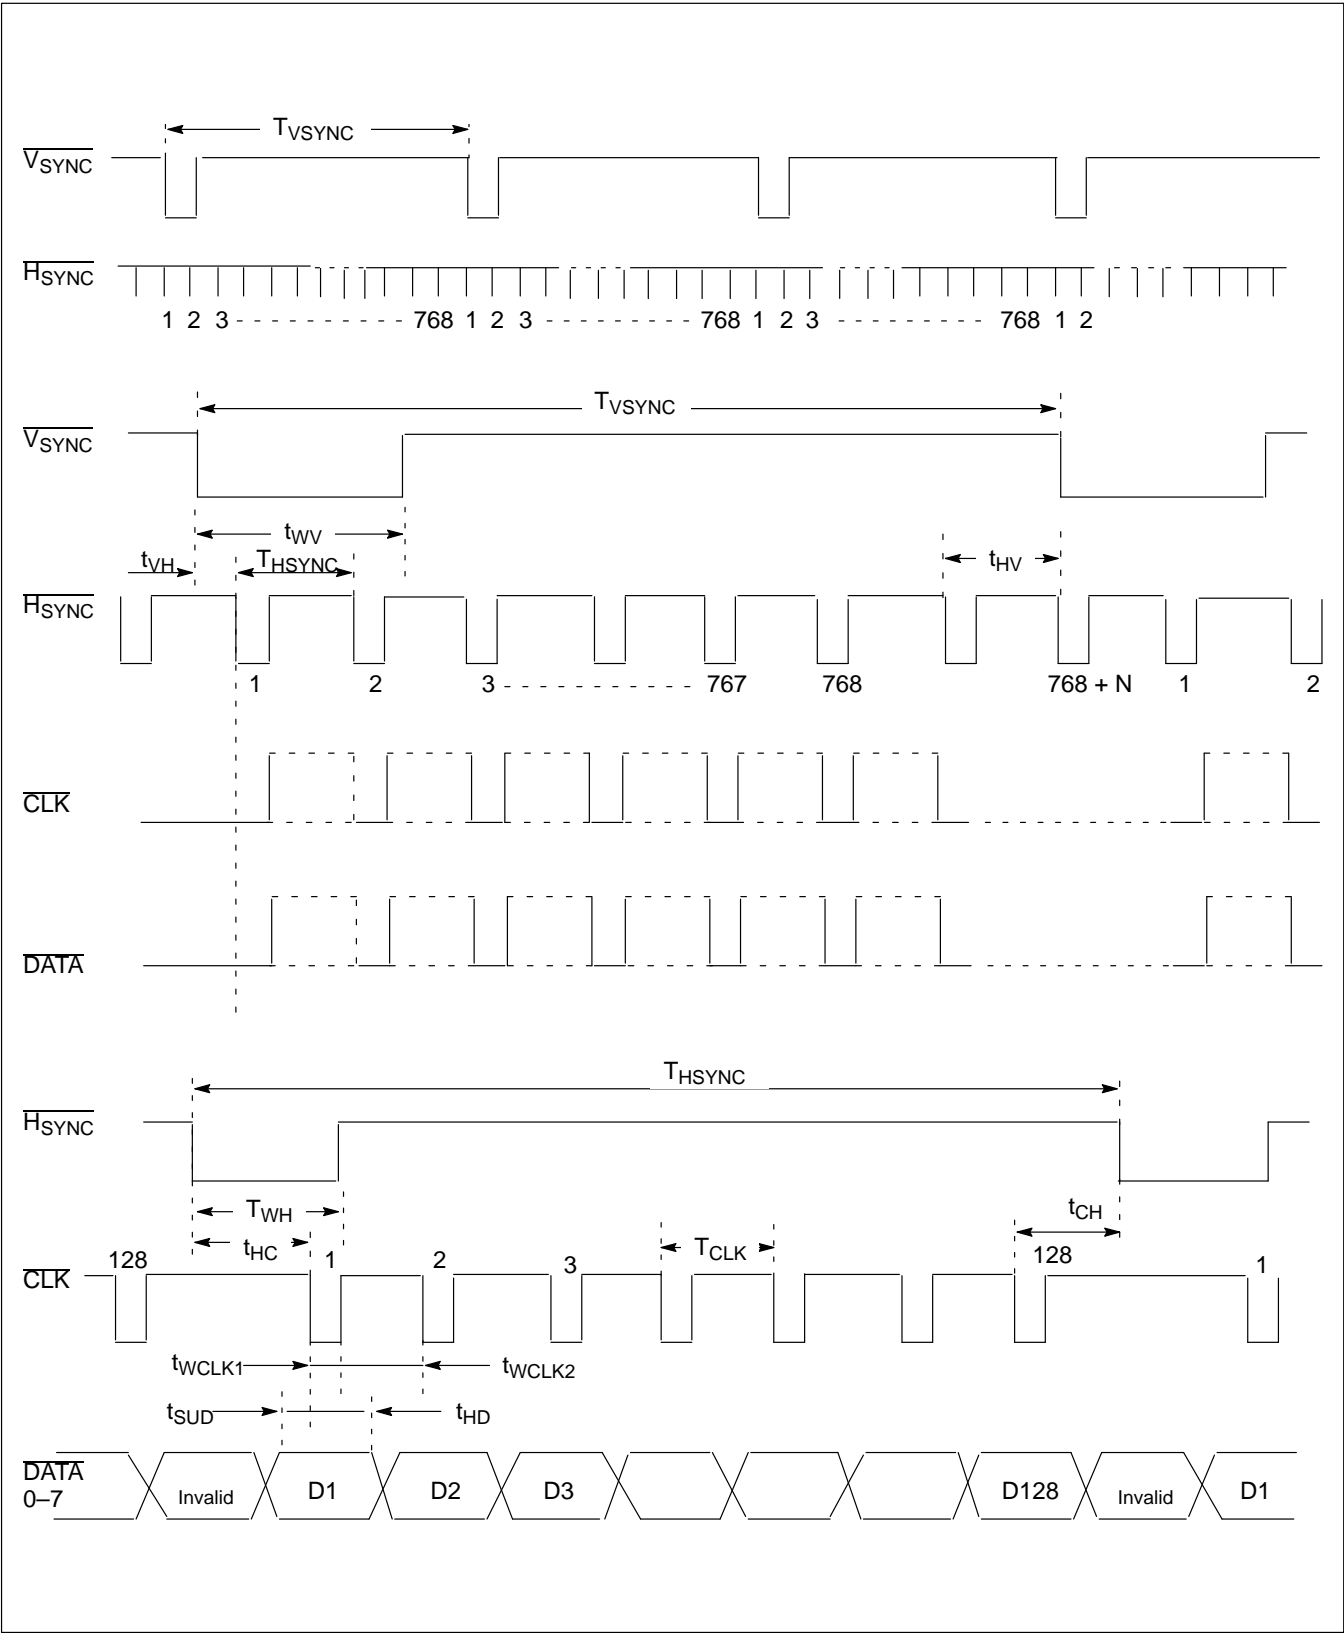

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN235PO50–G/E (Fujitsu)

Pin No.	Signal	Pin No.	Signal	Pin No.	Signal	Pin No.	Signal
1	DATA 0	2	GND	26	ON1B	27	GND
3	DATA 1	4	GND	28	ON1M	29	N.C.
5	DATA 2	6	GND	30	ON2M	31	ON2
7	DATA 3	8	GND	32	RDY	33	GND
9	DATA 4	10	GND	34	AUDIO	35	GND
11	DATA 5	12	GND	36	N.C.	37	N.C.
13	DATA 6	14	GND	38	TDKB	39	GND
15	DATA 7	16	GND	40	RDKB	41	GND
17	CLK	18	GND	42	GND	43	GND
19	H _{SYNC}	20	GND	44	GND	45	GND
21	V _{SYNC}	22	GND	46	+12V	47	+12V
23	DSPE	24	GND	48	+5V	49	+5V
25	NC			50	+5V		

Power Connector

GL–2030F (Tokin Corp)

Pin No.	Signal
1	AC
2	AC (COM)
3	FG

Keyboard Connector


Pin No.	Signal	Pin No.	Signal
1	RDKB	5	GND
2	TDKB	6	GND
3	GND	7	V _{CC}
4	GND	8	V _{CC}

FPF2000S-501

Plasma Display Monitor


Fujitsu's FPF2000S-501 plasma display is a stand-alone, high resolution, plasma display that offers a large screen (16-inch diagonal effective display area) with a 1280 × 1024-dot capacity (100 dots per inch). The display's thin-profile design has a depth of about one-fifth that of a standard CRT (only 3.5 in. package depth).

Because of Fujitsu's AC memory technology, the display has a reliability of 50,000 hours with no brightness degradation, image burn-in, or flicker over time. This high reliability, coupled with space-saving construction, makes the FPF2000S-501 ideal for QA equipment, engineering workstations, x-terminals, medical monitors, and CAD systems.

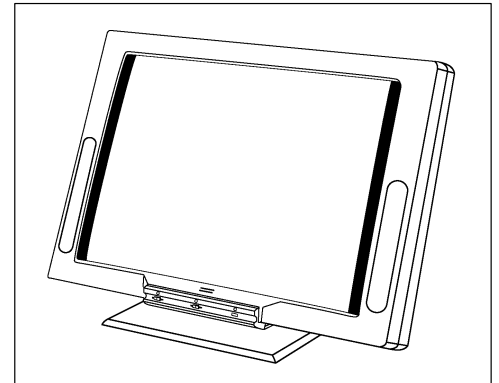

- Interface to Sun SPARC stations (IPC, IPX, SPARC Station 2)
- Large 16-inch diagonal screen with 1280 (H) × 1024 (V) pixel format (1.3 megapixel)
- Thin-profile design (14.33 lb)
- Reliability of 50,000 hours with no brightness degradation over time
- Display is free from flicker, warp, and image burn-in
- Easy-to-use interface complies with CRT standards
- Unit includes stand with tilt capability (+5 to -15°)
- FCC class A, UL, and CSA approved

BLOCK DIAGRAM

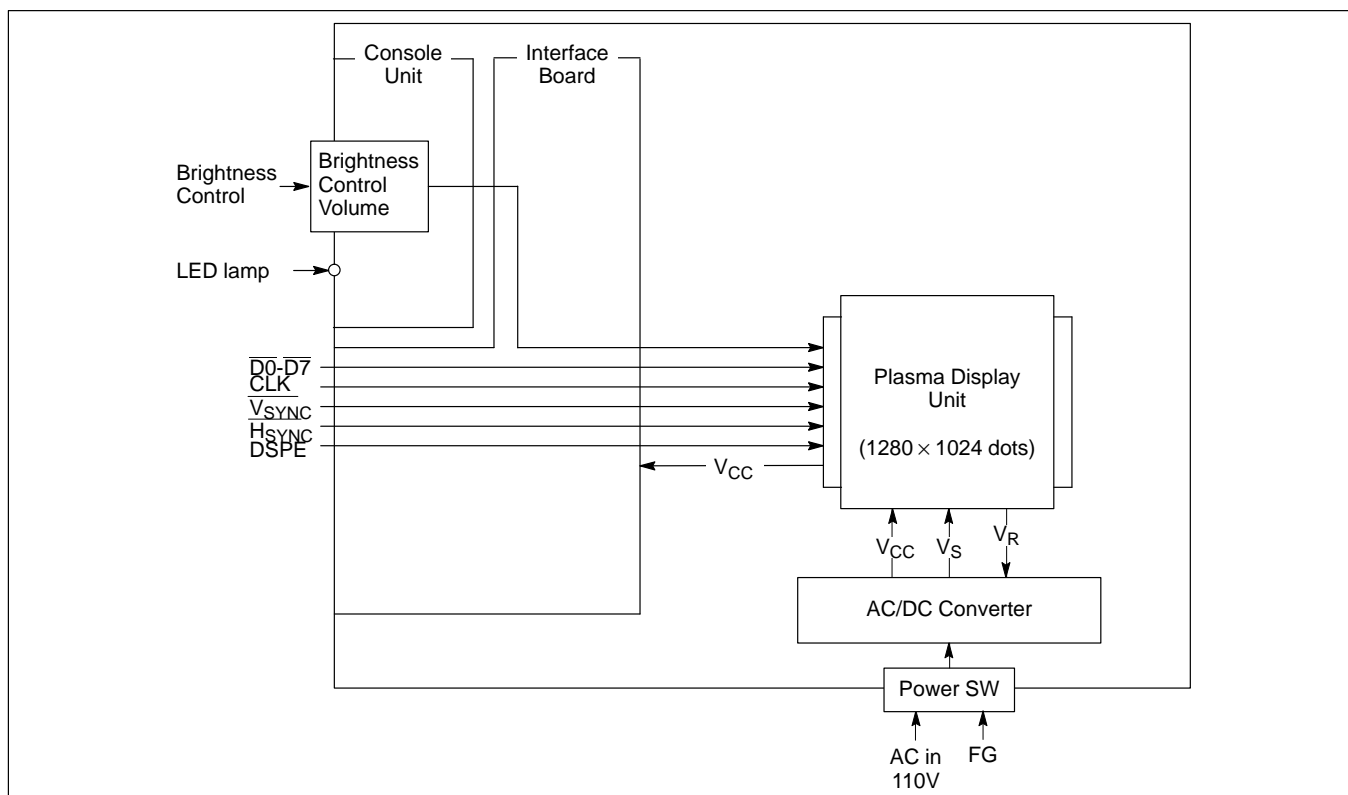

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Input Power Voltage	AC IN	135 VAC
Input Signal Voltage	V1	-0.5 V to +5.5 V

DC Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Input voltage (H)	V_{IH}	—	2.0	—	—	V
Input voltage (L)	V_{IL}	—	—	—	0.8	V
Input current (H)	I_{IH}	$V_{CC} = 5.25V, V_I = 2.7V$	—	—	20	μA
Input current (L)	I_{IL}	$V_{CC} = 5.25V, V_I = 0.4V$	—	—	-4	mA

Note: Values are measured at the input connector.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item		Specification
Display Performance	Display Capacity	1280 (H) × 1024 (V) dots (1,310,720 dots)
	Dot Pitch	0.25 (H) × 0.25 (V) mm (0.010 × 0.010 in.)
	Dot Size	Approximately 0.15 mm (0.006 in.) diameter
	Display Area	320 (H) mm × 256 (V) mm (12.60 in. × 10.08 in.)
	Display Color	Neon Orange
	Brightness	7 cd/m ² or more (at the display ratio of 30% max.)
	Contrast	20:1 or more under office lighting conditions (500 lux)
	Viewing Angle	120°
	Brightness Unevenness	Approximately 50%
Interface	Method	CRT Interface Compliance
	Vertical Sync.	$\overline{V_{SYNC}}$ 33.33 ms Typ. (approx. 30 Hz)
	Horizontal Sync.	$\overline{H_{SYNC}}$ 31.25 μ s Typ. (approx. 32 kHz)
	Dot Clock	\overline{CLK} 166.7 ns min. (approx. 6 MHz)
	Display Dot Data	$\overline{D0}$ to $\overline{D7}$ 8 bit parallel display data
	Display Enable	\overline{DSPE} (logic L: On, H: Off)
Power Supply	Input Voltage	100 VAC \pm 10%
	Frequency	50/60 Hz \pm 5%
	Power Consumption	Approximately 60 W max. (30 W max. for PDP)
Style	Construction	Standalone (with tilt stand)
	Dimensions	415 (W) × 346 (H) × 90 (D) mm (without tilt stand) (approx. 16.34 (W) × 13.62 (H) × 3.54 (D) in.) 415 (W) × 346 (H) × 200 (D) mm (with tilt stand) (approx. 16.34 (W) × 13.62 (H) × 7.8 (D) in.)
Weight	Approximately 14.33 lb (excluding cable)	

Performance Specifications

Item	Rating
Operating Temperature	0 to +35°C
Storage Temperature	−20 to +60°C
Humidity	20 to 80%RH (no condensation)
Atmospheric Pressure	700 to 1114 hPa
Electro Static Damage (ESD) resistance	9KV or greater (No wrong operation after applying for 3 minutes.)


Physical Construction and Operation

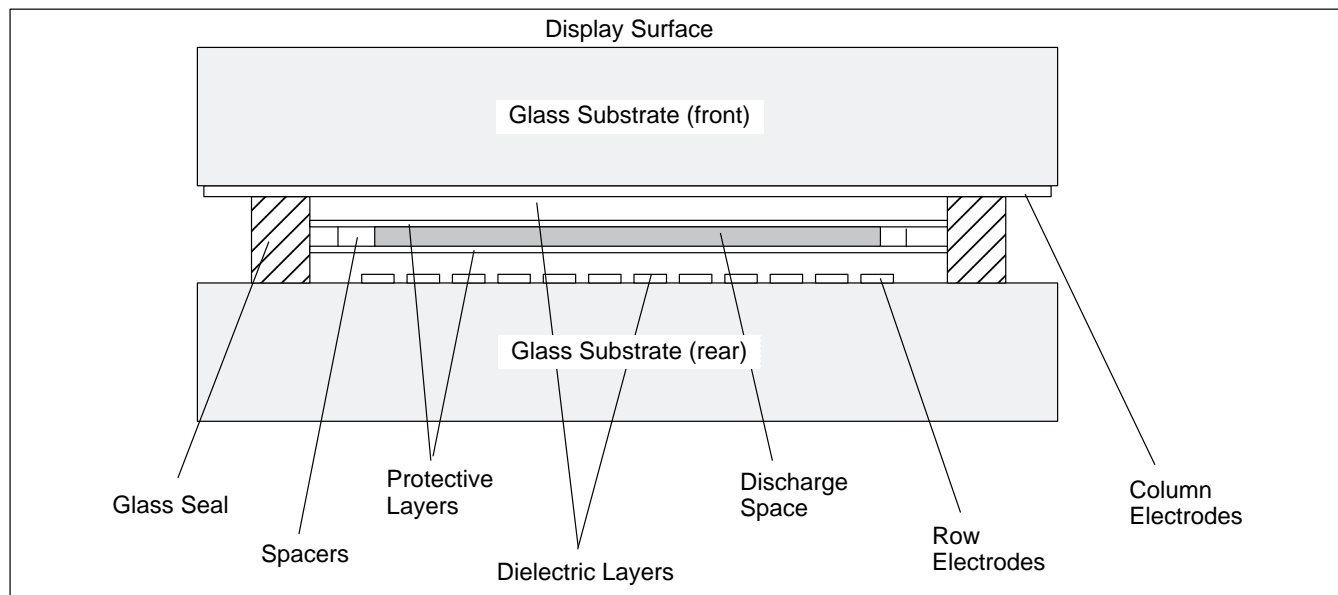

PDP Construction and Operation

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

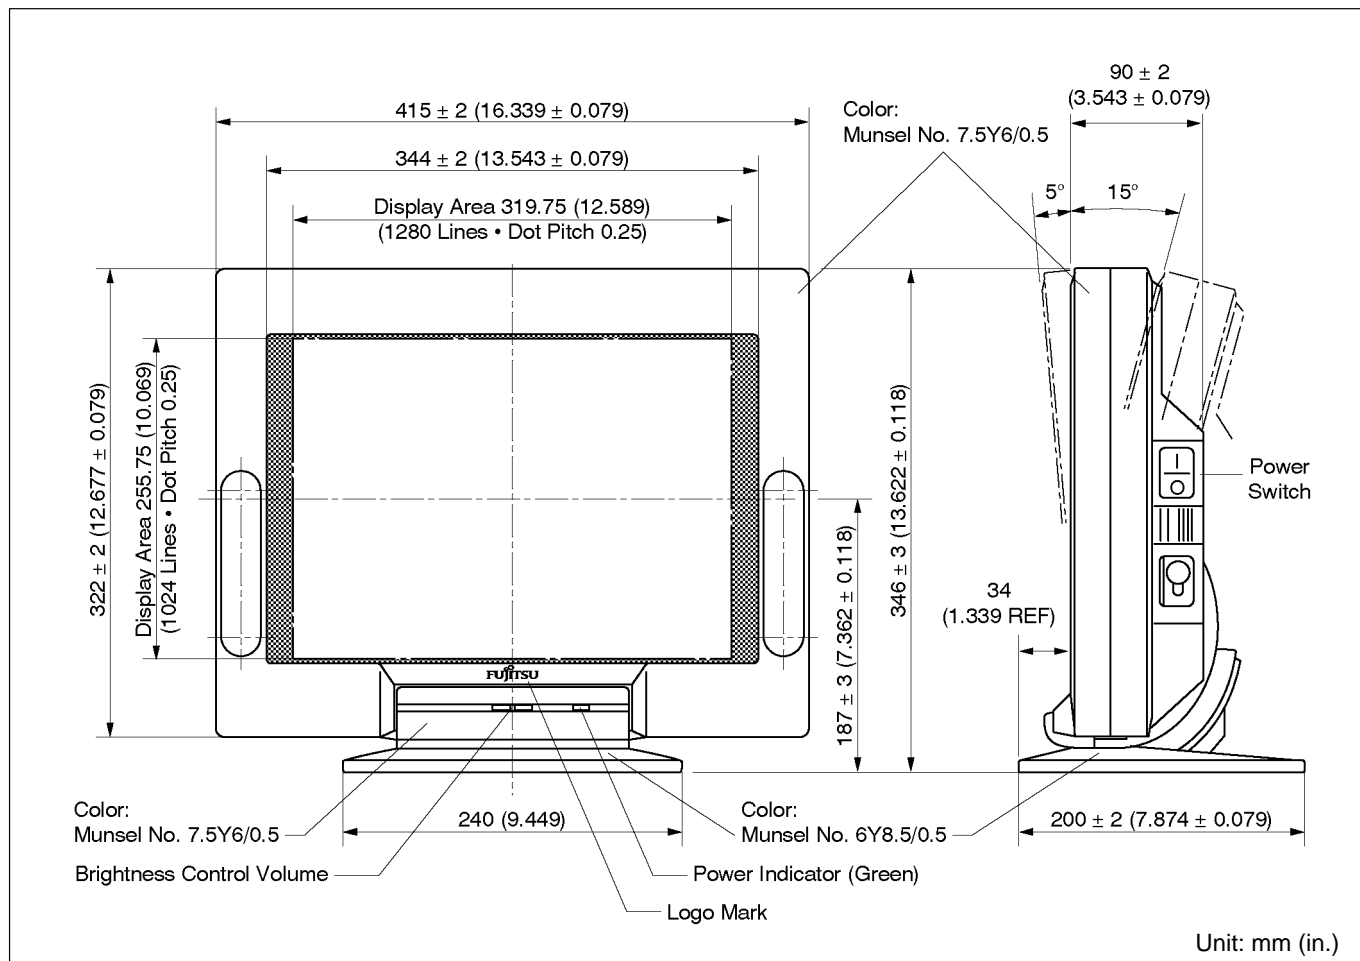


INTERFACE SIGNALS

Types of Signals

Signal Name	Symbol	I/O	Signal Line	Definition and Function
Display data	$\overline{D0}$ to $\overline{D7}$	I	8 lines	8-bit parallel display data. Logic L: On, H: Off The display position and relation between $\overline{D0}$ to $\overline{D7}$ is shown in the figure "Relationship Between Display Data and Display Dots" on the following page.
Clock	\overline{CLK}	I	1 line	Timing signal for display data. Display data are loaded at falling edge of this signal and transferred in sequence. 160 clock signals in one $\overline{H_{SYNC}}$ period.
Horizontal synchronous	$\overline{H_{SYNC}}$	I	1 line	Signal controlling the scanning timing and display time of each line electrode. Address increment to next line is done at the falling edge of $\overline{H_{SYNC}}$. 1024 or more $\overline{H_{SYNC}}$ signals in one $\overline{V_{SYNC}}$ period are required.
Vertical synchronous	$\overline{V_{SYNC}}$	I	1 line	Signal controlling the refresh speed of the screen. The scanning position returns to the first line electrode at the falling edge of $\overline{V_{SYNC}}$ signal.
Display enable	\overline{DSPE}	I	1 line	Signal controlling the display enable. Logic L: On, H: Off
Reserved	(res)	—	14 lines	Signal line is not permitted to be connected.

Relationship Between Display Data and Display Dots

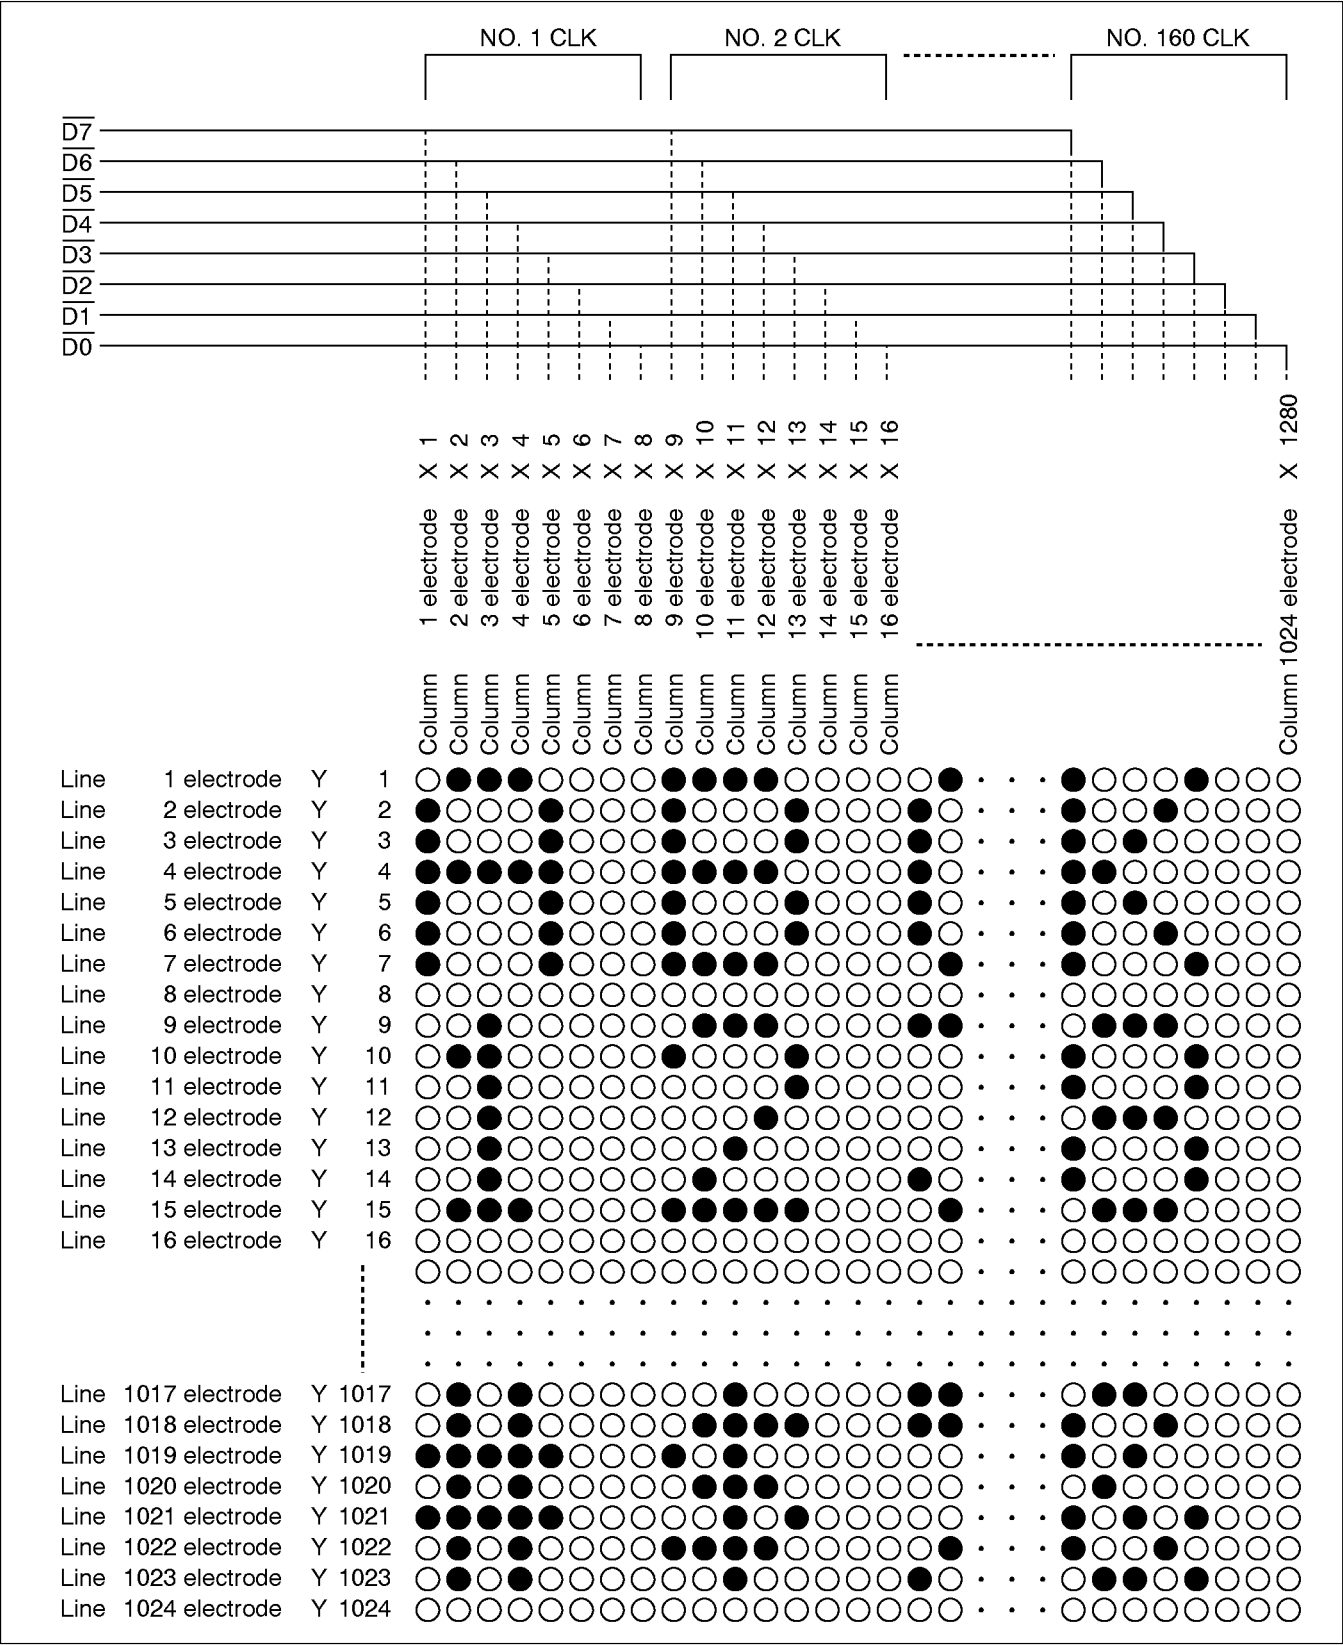


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	1024	(1067)	—	H	$F_{VSYNC} = (30) \text{ Hz (Typ.)}$
t_{WV}	1	(3)	—	H	$H = T_{HSYNC}$
t_{VH}	1	(14)	—	μs	
t_{HV}	2	(17.25)	—	μs	
T_{HSYNC}	30.0	(31.25)	45	μs	$T_{HSYNC} = (32) \text{ kHz (Typ.)}$
t_{WH}	1	(2)	—	μs	
t_{HC}	0.5	(2)	—	μs	
t_{CH}	0.1	(2.7)	—	μs	
T_{CLK}	166.7	—	—	ns	$F_{CLK} = 6 \text{ MHz}$
t_{WCLK1}	83.3	—	—	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ $DUTY = 50\% \text{ (typ.)}$
t_{WCLK2}	83.3	—	—	ns	
t_{SUD}	40	—	—	ns	
t_{HD}	70	—	—	ns	

Note: Values in parentheses () are the one example of timing condition.

Interface Signal Timing Chart

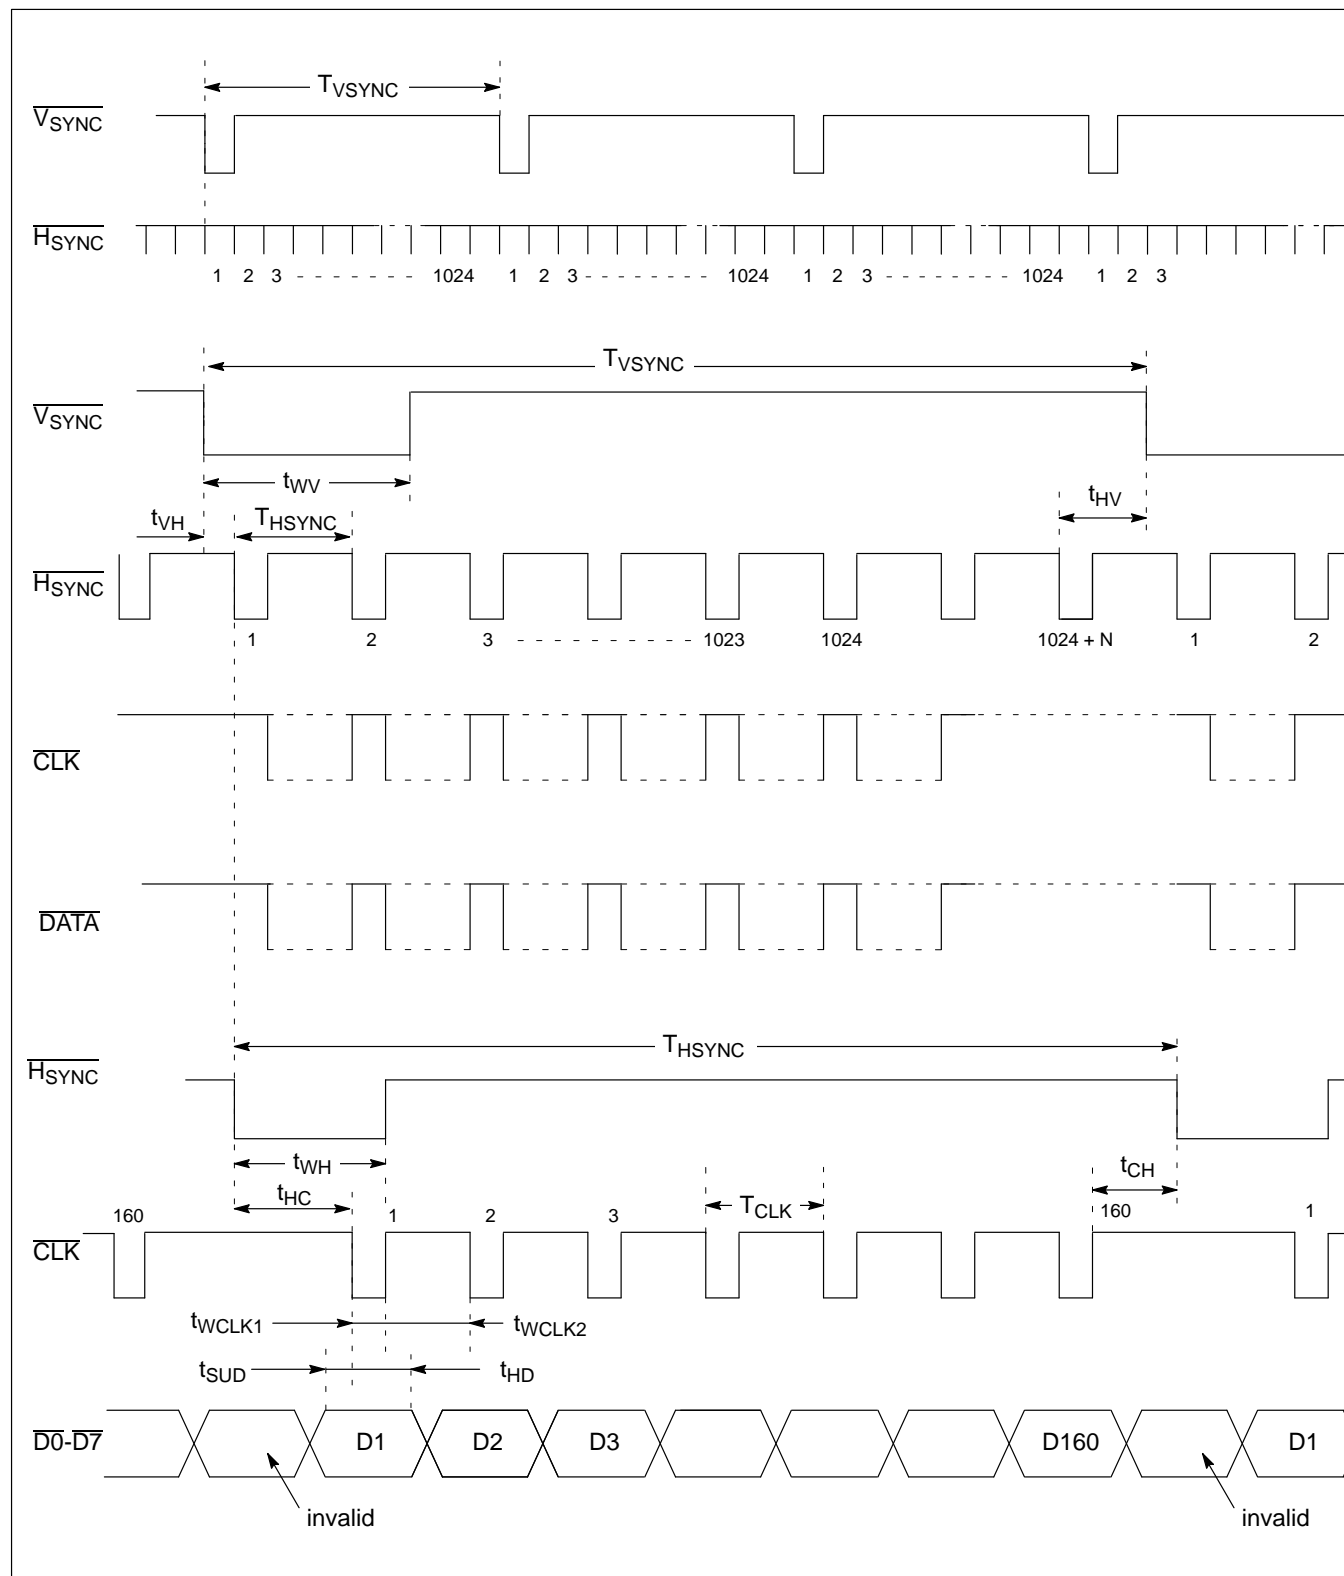

Notes:¹ $N = 0, 1, 2, \dots$
²Number of CLKs in one \overline{H}_{SYNC} period is 160. The continuous CLS is not permitted.

CONNECTOR PIN ASSIGNMENT

Pin Arrangement of Interface Signals (Display Side)

No.	Symbol	No.	Symbol	No.	Symbol	No.	Symbol
1	$\overline{D7}$	2	GND	26	(res)	27	GND
3	$\overline{D6}$	4	GND	28	(res)	29	GND
5	$\overline{D5}$	6	GND	30	(res)	31	(res)
7	$\overline{D4}$	8	GND	32	(res)	33	GND
9	$\overline{D3}$	10	GND	34	(res)	35	GND
11	$\overline{D2}$	12	GND	36	GND	37	GND
13	$\overline{D1}$	14	GND	38	(res)	39	GND
15	$\overline{D0}$	16	GND	40	(res)	41	GND
17	\overline{CLK}	18	GND	42	GND	43	GND
19	$\overline{H_{SYNC}}$	20	GND	44	GND	45	(res)
21	$\overline{V_{SYNC}}$	22	GND	46	(res)	47	(res)
23	\overline{DSPE}	24	GND	48	(res)	49	(res)
25	GND			50	(res)		

Notes: Applicable connector: FCN-235D050-G/C


(res): reserved

FPF2000S-601

Plasma Display Monitor


Fujitsu's FPF2000S-601 plasma display is a stand-alone, high resolution, plasma display that offers a large screen (16-inch diagonal effective display area) with a 1280 × 1024-dot capacity (100 dots per inch). The display's thin-profile design has a depth of about one-fifth that of a standard CRT (only 3.5 in. package depth).

Because of Fujitsu's AC memory technology, the display has a reliability of 50,000 hours with no brightness degradation, image burn-in, or flicker over time. This high reliability, coupled with space-saving construction, makes the FPF2000S-601 ideal for QA equipment, engineering workstations, x-terminals, medical monitors, and CAD systems.

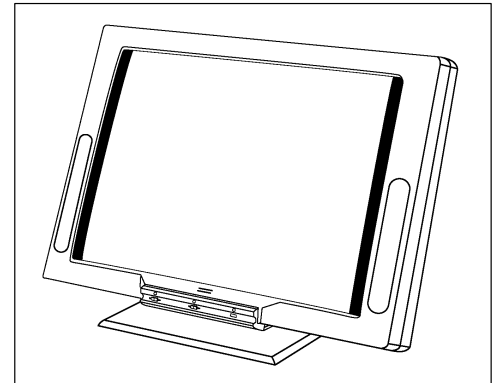

- Interface to Sun SPARC stations (IPC, IPX, SPARC Station 2)
- Large 16-inch diagonal screen with 1280 (H) × 1024 (V) pixel format (1.3 megapixel)
- Thin-profile design (16.66 lb)
- Reliability of 50,000 hours with no brightness degradation over time
- Display is free from flicker, warp, and image burn-in
- Easy-to-use interface complies with CRT standards
- Unit includes stand with tilt capability (+5 to -15°)
- FCC class A, UL, and CSA approved

BLOCK DIAGRAM

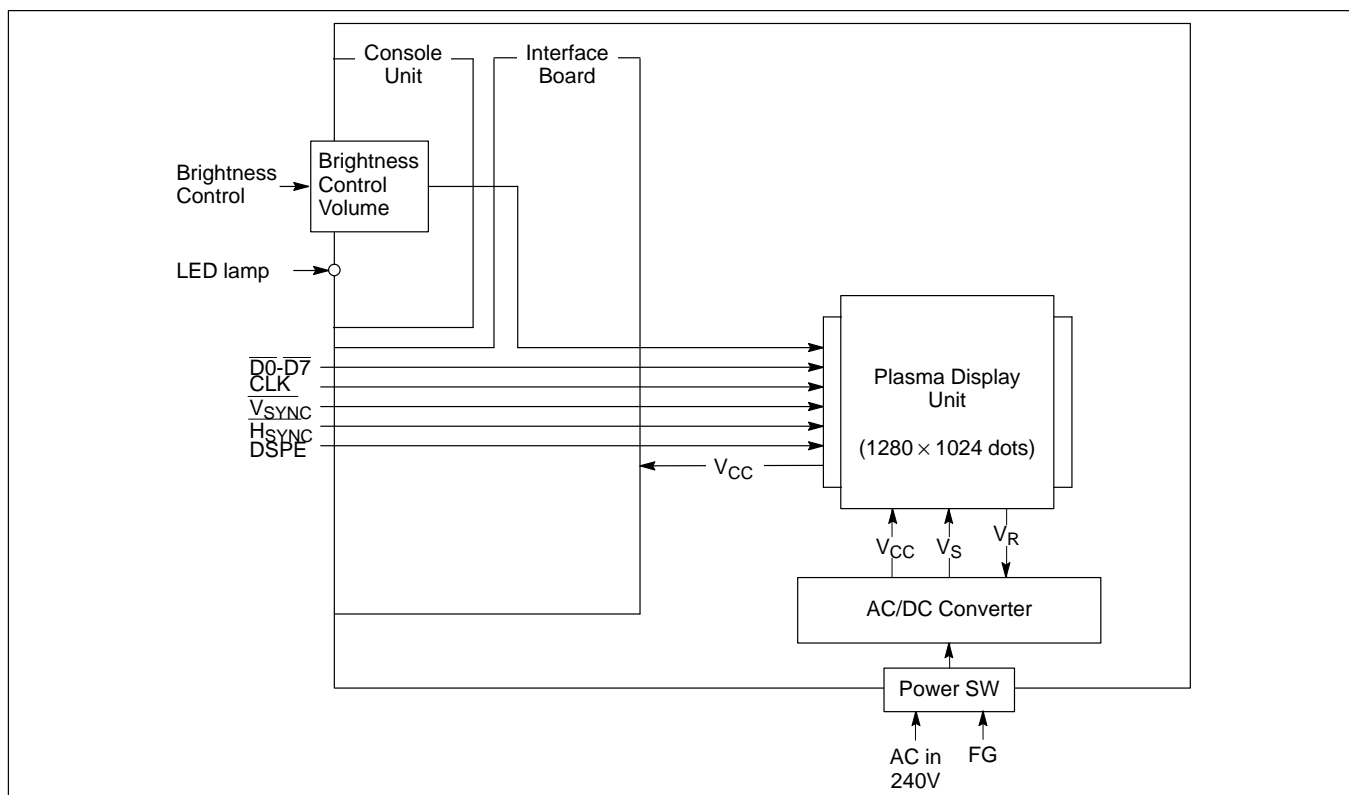

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Rating
Input Power Voltage	AC IN	280 VAC
Input Signal Voltage	V1	-0.5 V to +5.5 V

DC Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Input voltage (H)	V_{IH}	—	2.0	—	—	V
Input voltage (L)	V_{IL}	—	—	—	0.8	V
Input current (H)	I_{IH}	$V_{CC} = 5.25V, V_I = 2.7V$	—	—	20	μA
Input current (L)	I_{IL}	$V_{CC} = 5.25V, V_I = 0.4V$	—	—	-4	mA

Note: Values are measured at the input connector.

MECHANICAL SPECIFICATIONS


Physical Specifications

Item		Specification
Display Performance	Display Capacity	1280 (H) × 1024 (V) dots (1,310,720 dots)
	Dot Pitch	0.25 (H) × 0.25 (V) mm (0.010 × 0.010 in.)
	Dot Size	Approximately 0.15 mm (0.006 in.) diameter
	Display Area	320 (H) mm × 256 (V) mm (12.60 in. × 10.08 in.)
	Display Color	Neon Orange
	Brightness	7 cd/m ² or more (at the display ratio of 30% max.)
	Contrast	20:1 or more under office lighting conditions (500 lux)
	Viewing Angle	120°
	Brightness Unevenness	Approximately 50%
Interface	Method	CRT Interface Compliance
	Vertical Sync.	$\overline{V_{SYNC}}$ 33.33 ms Typ. (approx. 30 Hz)
	Horizontal Sync.	$\overline{H_{SYNC}}$ 31.25 μ s Typ. (approx. 32 kHz)
	Dot Clock	\overline{CLK} 166.7 ns min. (approx. 6 MHz)
	Display Dot Data	$\overline{D0}$ to $\overline{D7}$ 8 bit parallel display data
	Display Enable	\overline{DSPE} (logic L: On, H: Off)
Power Supply	Input Voltage	220 to 240 VAC
	Frequency	50/60 Hz ± 5%
	Power Consumption	Approximately 60 W max. (30 W max. for PDP)
Style	Construction	Stand-alone (with tilt stand)
	Dimensions	415 (W) × 346 (H) × 90 (D) mm (without tilt stand) (approx. 16.34 (W) × 13.62 (H) × 3.54 (D) in.) 415 (W) × 346 (H) × 200 (D) mm (with tilt stand) (approx. 16.34 (W) × 13.62 (H) × 7.8 (D) in.)
Weight	Approximately 16.66 lb (excluding cable)	

Performance Specifications

Item	Rating
Operating Temperature	0 to +35°C
Storage Temperature	−20 to +60°C
Humidity	20 to 80 %RH (no condensation)
Atmospheric Pressure	700 to 1114 hPa
Electro Static Damage (ESD) resistance	9KV or greater (No wrong operation after applying for 3 minutes.)


Physical Construction and Operation

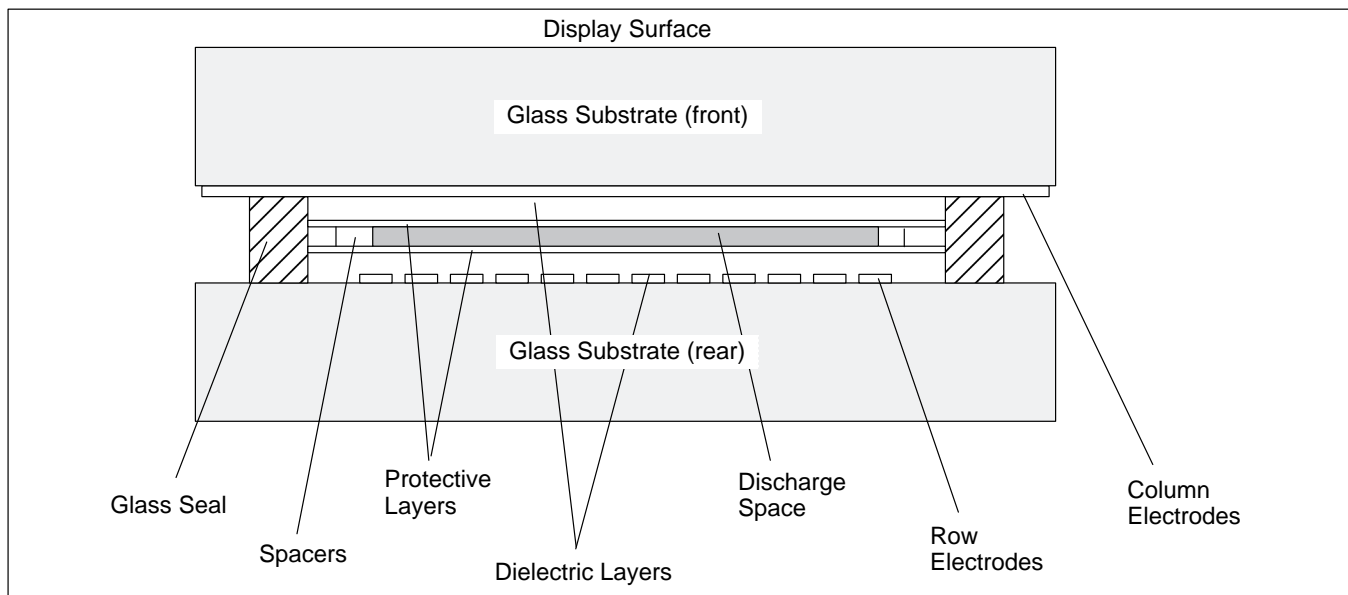

PDP Construction and Operation

The figure above illustrates the structure of Fujitsu's AC-type plasma displays. X-electrodes (columns) and Y-electrodes (lines) are formed on two mating glass substrates and are subsequently covered with dielectric material. Each dielectric layer is then covered with a protective layer of magnesium-oxide (MgO) to prevent ion shock damage during discharge and to prolong its service life. This protective layer also emits secondary electrons during cell operation; this greatly improves the light-emission characteristics of the panel since MgO emits large quantities of electrons in the presence of an ionizing gas. Numerous spacers are placed between the glass substrates to maintain gap uniformity at about 0.1 mm over the entire panel. The spacers are so arranged that electrodes are positioned perpendicularly, while their peripheral parts are sealed in glass. The primary discharge gas used in the panel is neon, with a small quantity of xenon to stabilize discharge characteristics within the panel and improve emission.

External Dimensions

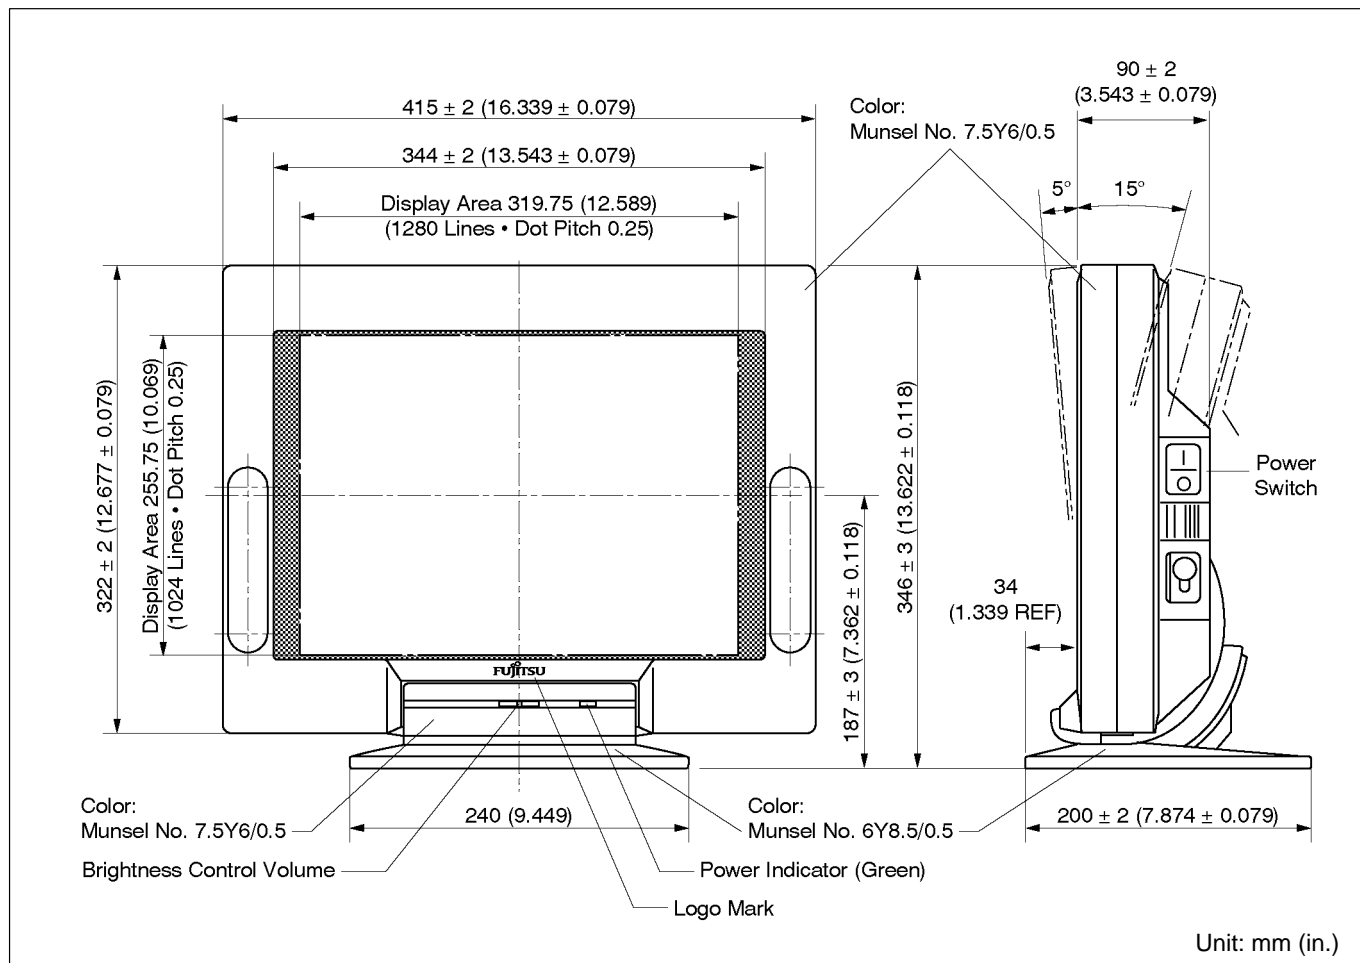


INTERFACE SIGNALS

Types of Signals

Signal Name	Symbol	I/O	Signal Line	Definition and Function
Display data	$\overline{D0}$ to $\overline{D7}$	I	8 lines	8-bit parallel display data. Logic L: On, H: Off The display position and relation between $\overline{D0}$ to $\overline{D7}$ is shown in the figure "Relationship Between Display Data and Display Dots" on the following page.
Clock	\overline{CLK}	I	1 line	Timing signal for display data. Display data are loaded at falling edge of this signal and transferred in sequence. 160 clock signals in one $\overline{H_{SYNC}}$ period.
Horizontal synchronous	$\overline{H_{SYNC}}$	I	1 line	Signal controlling the scanning timing and display time of each line electrode. Address increment to next line is done at the falling edge of $\overline{H_{SYNC}}$. 1024 or more $\overline{H_{SYNC}}$ signals in one $\overline{V_{SYNC}}$ period are required.
Vertical synchronous	$\overline{V_{SYNC}}$	I	1 line	Signal controlling the refresh speed of the screen. The scanning position returns to the first line electrode at the falling edge of $\overline{V_{SYNC}}$ signal.
Display enable	\overline{DSPE}	I	1 line	Signal controlling the display enable. Logic L: On, H: Off
Reserved	(res)	–	14 lines	Signal line is not permitted to be connected.

Relationship Between Display Data and Display Dots

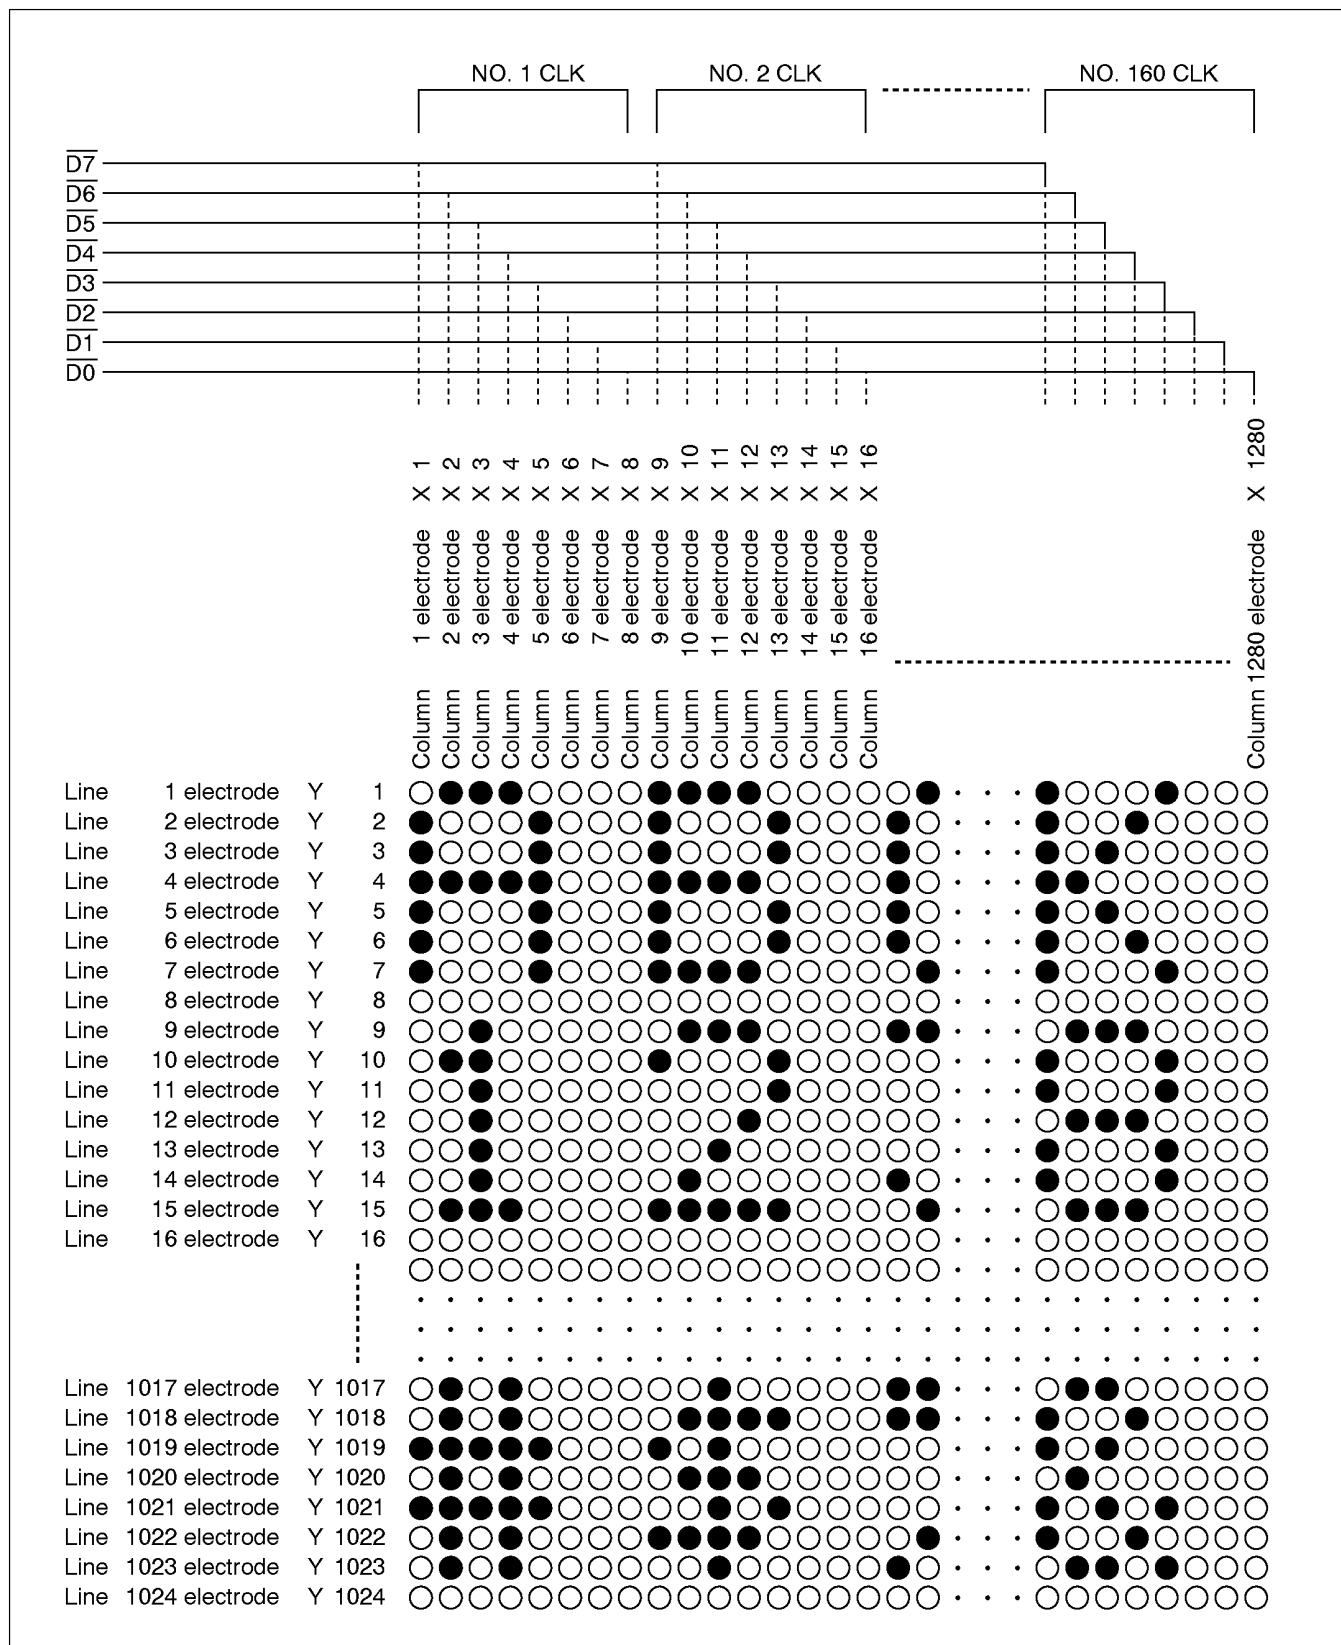


Interface Signal Timing

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}	1024	(1067)	—	H	$F_{VSYNC} = (30) \text{ Hz (Typ.)}$
t_{WV}	1	(3)	—	H	$H = T_{HSYNC}$
t_{VH}	1	(14)	—	μs	
t_{HV}	2	(17.25)	—	μs	
T_{HSYNC}	30.0	(31.25)	45	μs	$T_{HSYNC} = (32) \text{ kHz (Typ.)}$
t_{WH}	1	(2)	—	μs	
t_{HC}	0.5	(2)	—	μs	
t_{CH}	0.1	(2.7)	—	μs	
T_{CLK}	166.7	—	—	ns	$F_{CLK} = 6 \text{ MHz}$
t_{WCLK1}	83.3	—	—	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$ $DUTY = 50\% \text{ (typ.)}$
t_{WCLK2}	83.3	—	—	ns	
t_{SUD}	40	—	—	ns	
t_{HD}	70	—	—	ns	

Note: Values in parentheses () are the one example of timing condition.

Interface Signal Timing Chart

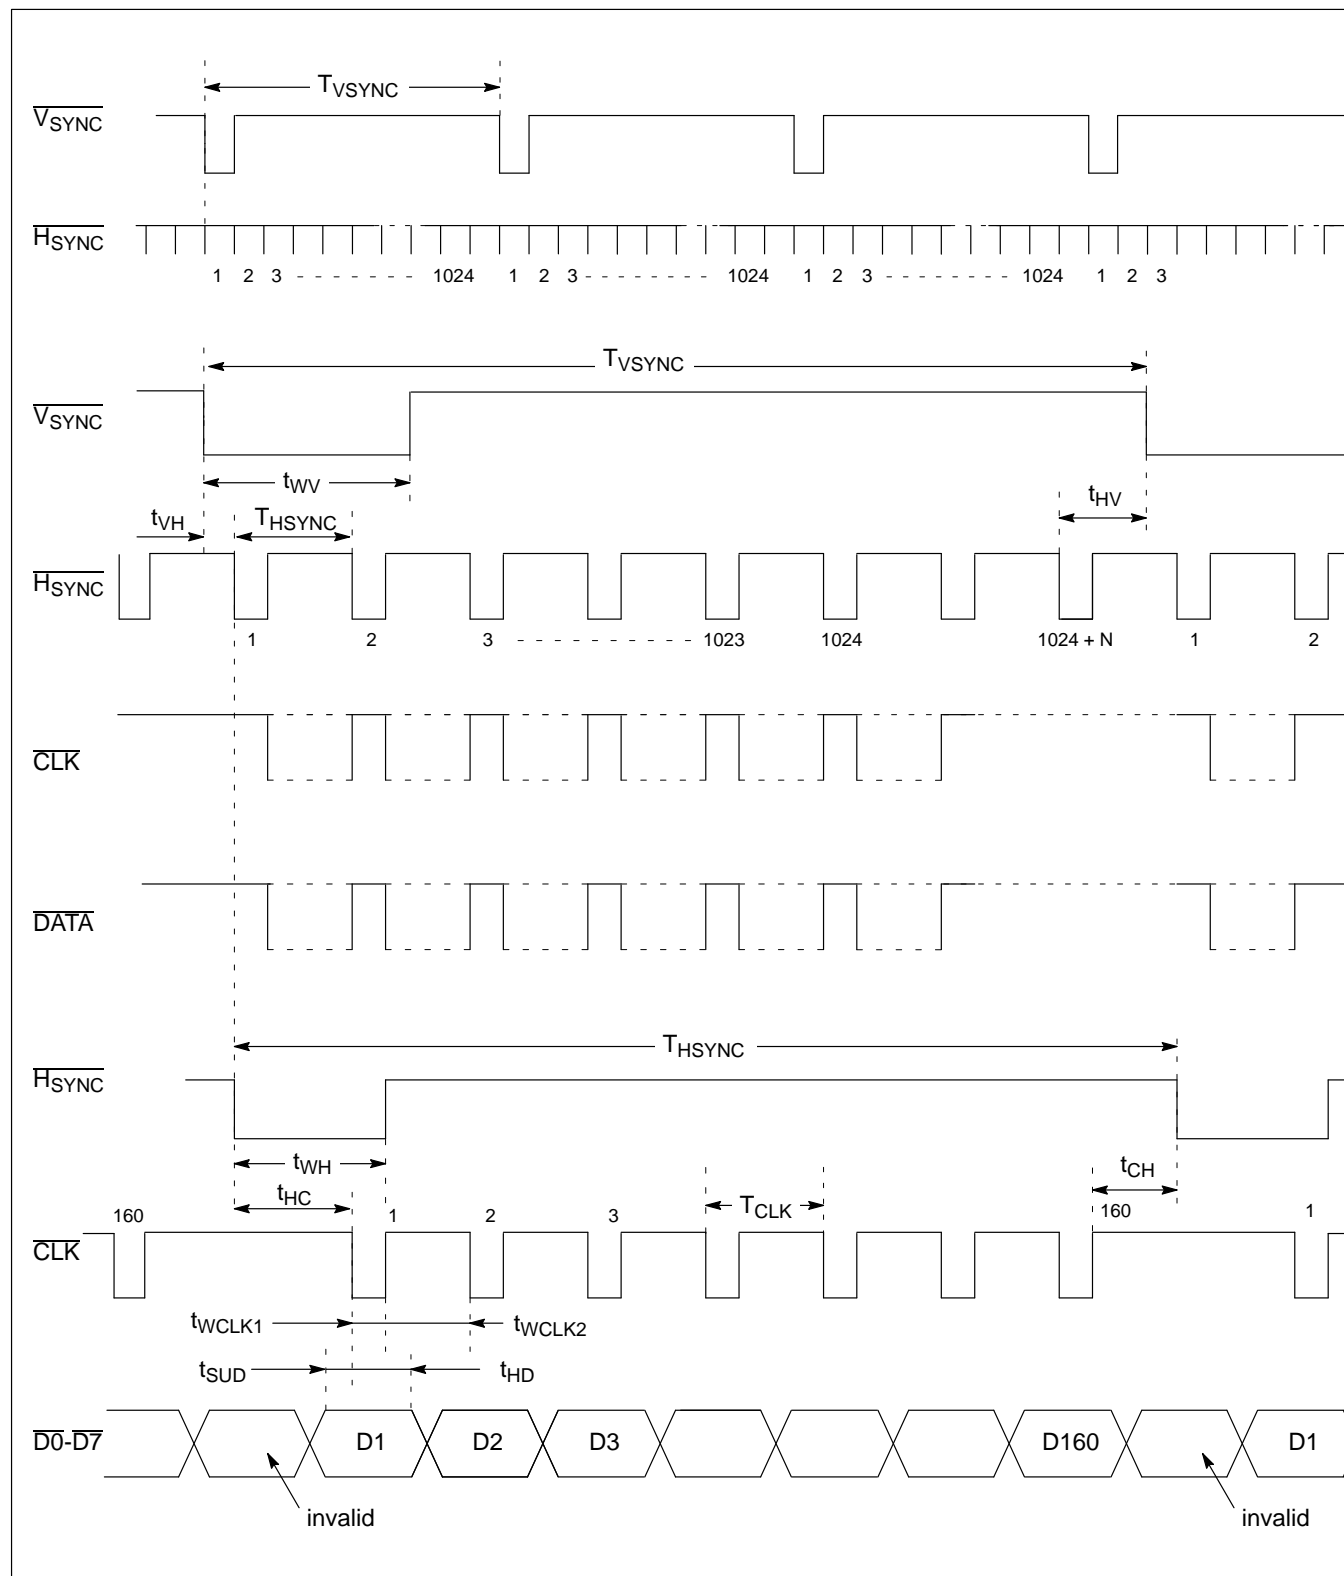

Notes:¹ $N = 0, 1, 2, \dots$
²Number of CLKs in one \overline{H}_{SYNC} period is 160. The continuous CLS is not permitted.

CONNECTOR PIN ASSIGNMENT**Pin Arrangement of Interface Signals (Display Side)**

No.	Symbol	No.	Symbol	No.	Symbol	No.	Symbol
1	D7	2	GND	26	(res)	27	GND
3	D6	4	GND	28	(res)	29	GND
5	D5	6	GND	30	(res)	31	(res)
7	D4	8	GND	32	(res)	33	GND
9	D3	10	GND	34	(res)	35	GND
11	D2	12	GND	36	GND	37	GND
13	D1	14	GND	38	(res)	39	GND
15	D0	16	GND	40	(res)	41	GND
17	CLK	18	GND	42	GND	43	GND
19	H _{SYNC}	20	GND	44	GND	45	(res)
21	V _{SYNC}	22	GND	46	(res)	47	(res)
23	DSPE	24	GND	48	(res)	49	(res)
25	GND			50	(res)		

Notes: Applicable connector: FCN-235D050-G/C

(res): reserved

Graphic Units with Touch Panels
(optical touch panels plus units)
— At a Glance


Device	Page
FTE8050BP	8-3
FTE8050BPE	8-21
FTE8060BPC	8-25
FTE8050RP-003	8-25

FTE8050BP

Plasma Display Unit with Touch Panel


The FTE8050BP is a human-machine interface that provides both screen display and input functions in a single unit. The display unit employs a 640×400 dot AC memory plasma display.

The touch panel controls a display screen which has a resolution of $3.18 \text{ mm} \times 3.18 \text{ mm}$ and outputs via an RS-232C interface.

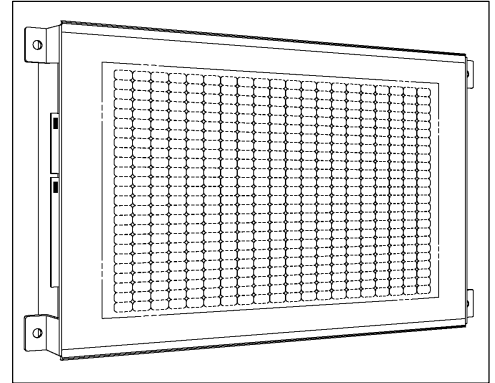

- Compact, thin construction and design
- Anti-glare filter with bezel
- Standard interface
- Integrated display & touch panel with no visible degradation in quality
- Applications:
 - Transaction terminals, ATMs and other banking applications
 - Medical equipment, ie CT scanners
 - Factory automation devices, ie NC controllers, robots, semiconductor fabrication equipment

BLOCK DIAGRAM

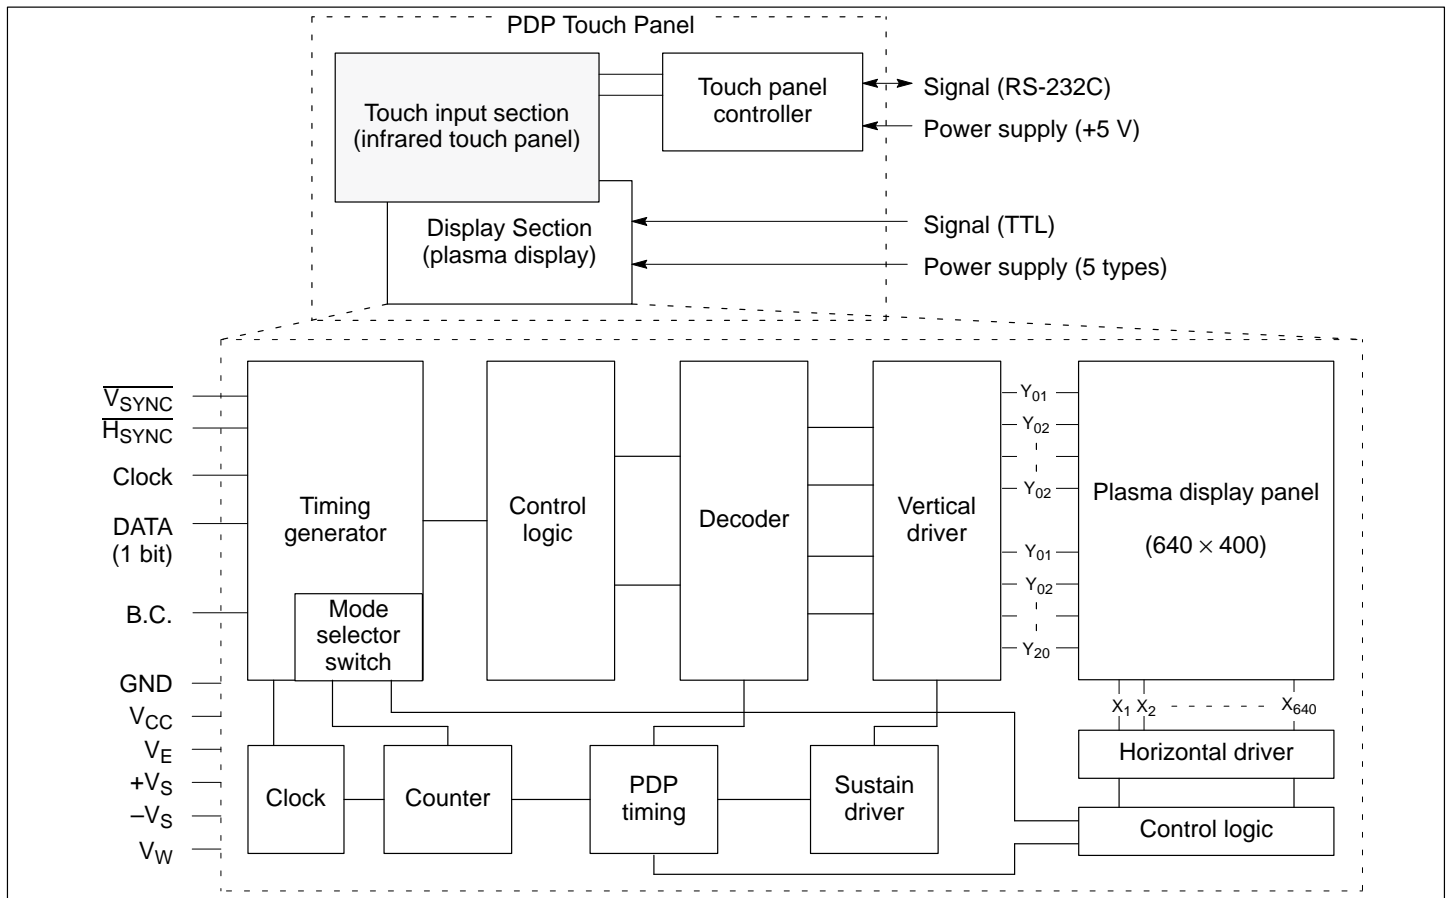

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item		Symbol	Maximum rating
Display	Sustain driver	$+V_S$	+125 V
	Sustain driver	$-V_S$	-125 V
	Write driver	V_W	+180 V
	Line control driver	V_E	+45 V
	Logic	V_{CC}	+7 V
Touch panel	Touch panel driver	V_{DD}	+7 V

DC Characteristics

Item		Symbol	Minimum	Nominal	Maximum	Unit
Voltage	Input voltage (high level)	V_{IH}	2.4	–	5.25	V
	Input voltage (low level)	V_{IL}	-0.5	–	0.4	V
Current	Input current (high level) ($V_I = 2.75$ V, $V_{CC} = 5.25$ V)	I_{IL}	–	–	20	μ A
	Input current (low level) $V_I = 0.4$ V, $V_{CC} = 5.25$ V	I_{IL}	–	–	-16	mA

Display and Touch Panel Power Supplies

Item		Symbol	Reference voltage (V)	Range (V) ¹	Allowable power fluctuation (maximum)	Noise and ripple (maximum)	Current (mA)	
							Standard ²	Maximum ²
Display	Sustain driver	+V _S	+95	±15	±2%	500 mV _{pp}	75	160
	Sustain driver	−V _S	−95	±15	±2%	500 mV _{pp}	75	160
	Write driver	V _W	+165	+10/−15	±2%	500 mV _{pp}	10	20
	Line control driver	V _E	+40	−	±5%	100 mVpp	100	150
	Logic	V _{CC}	+5	−	±5%	50 mVpp	350	450
Touch Panel	Touch Panel Driver	V _{DD}	+5	−	±5%	50 mVpp	350	400

Display Unit Output Power Supply

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
For V_S specification	Voltage	V_R ¹	With 1 k Ω load	0	–	2.5	
	Ripple and noise	V_{NRR}	With 1 k Ω load	–	–	± 500	mV
	Stability (average)	–	With 1 k Ω load	–	–	± 0.1	%
	Current (average)	I_{CC}	With 1 k Ω load	–	–	10	mA

MECHANICAL SPECIFICATIONS

Physical Specifications (Display)

Item	Value
Number of Display Dots	640 (H) × 400 (V) dots (256,000 dots)
Dot Pitch	0.33 (H) × 0.33 (V) mm (0.013 × 0.013 in.)
Dot Size	0.2 mm (0.008 in.)
Effective Screen Size	132 (V) × 211 (H) mm (5.197 × 8.307 in.)
Display Color	Neon orange
Dot Brightness	90 cd/m ² (typical)
Contrast Ratio	20 : 1 minimum
Viewing Angle	120 degrees minimum
Brightness Unevenness	50% maximum
Weight	2.5 kg
External Dimensions	See External Dimensions figure


Physical Specifications (Touch Input)

Item	Value
Coordinate Detection Area	210 (H) × 133 (V) mm
Detection Resolution	3.18 (H) × 3.18 (V) mm
Coordinate Detection Time	50 ms (typical)
Surface Filter Treatment	Non-glare treatment
Coordinate Origin	Coordinates at the leftmost end of the detection area is (0,0)


Performance Specifications

Item	Value
Operating Temperature	0 to 50 °C
Storage Temperature	–20 to +70 °C
Humidity	30 to 85% RH (no condensation)
Atmospheric Pressure Durability	Operation: 700 to 1114 hPa Non-operation: 340 to 1114 hPa
Vibration Acceleration:	Operation: 0.5 G maximum Non-operation: 2 G maximum
Frequency:	10 to 55 Hz to 10 Hz/minute
Time:	Operation: 20 minutes in X, Y, and Z direction Non-operation: 20 minutes in X, Y, and Z direction
Shock (at non-operation) Acceleration:	20 G max. in X, Y, and Z direction
Time:	11 ms maximum
Interference Fringes	When the center of the touch surface is pressed with a maximum force of 500 grams, no interference fringe shall be produced. If generated, the interference fringe shall disappear when pressure is removed.

External Dimensions (front)

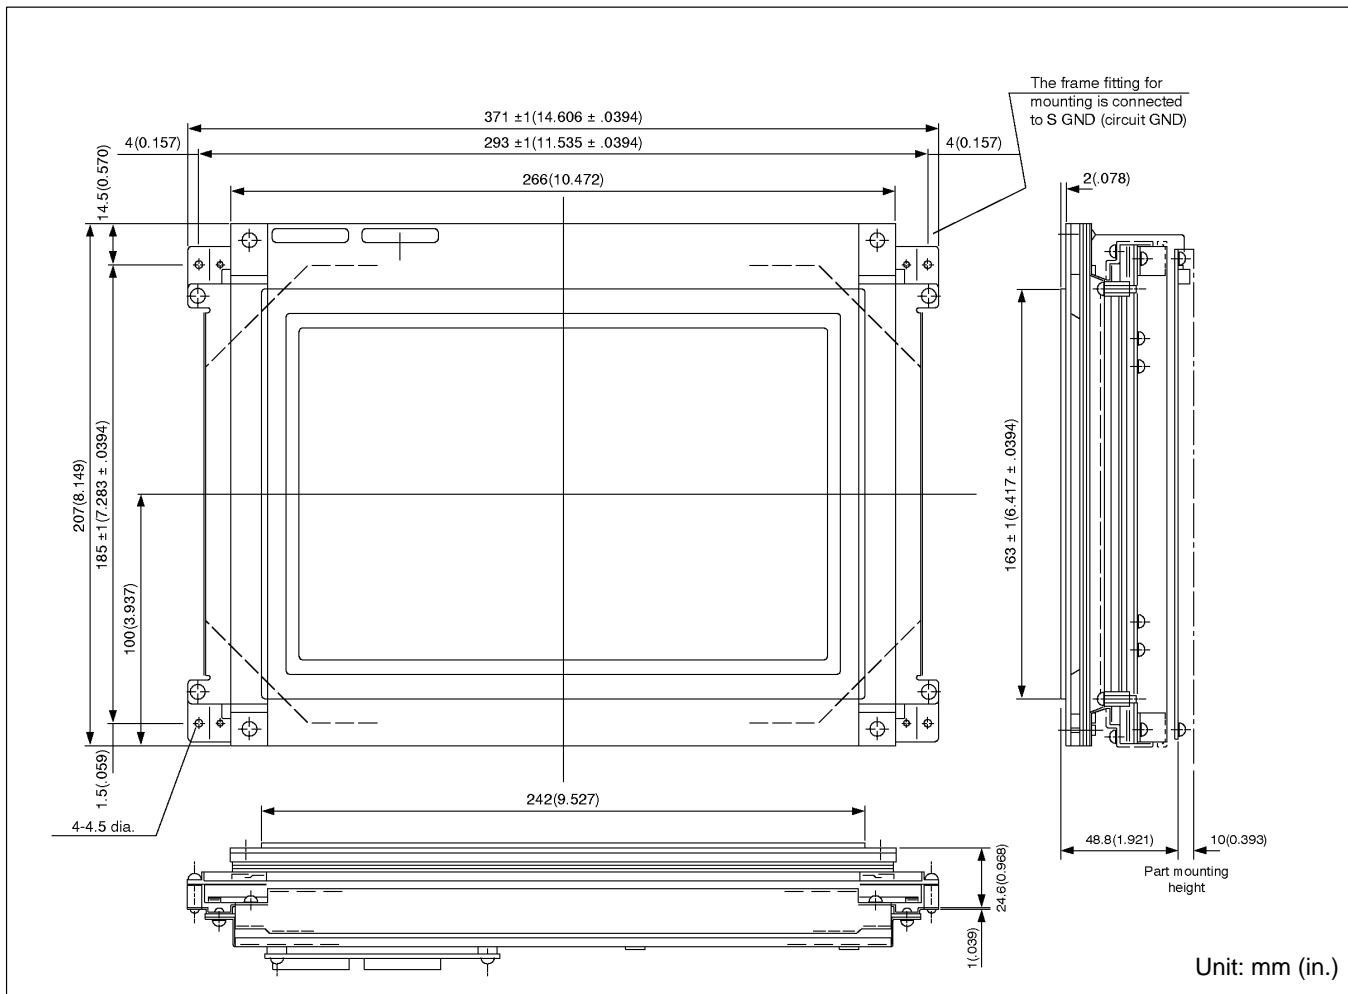

External Dimensions (back)

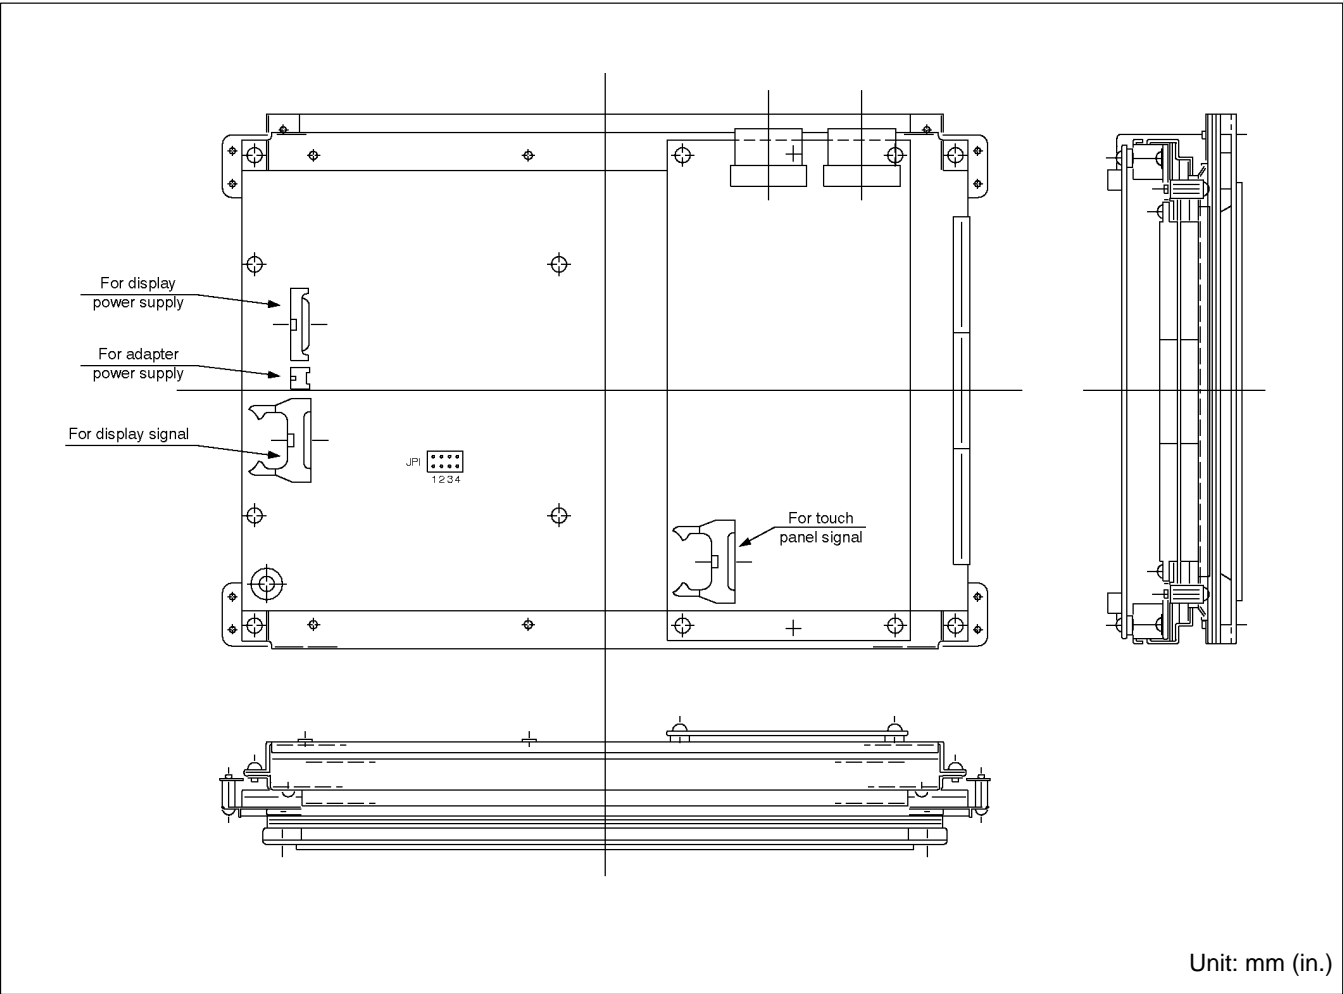

INTERFACE SIGNALS

Types of Signals

Signal name	Symbol	Number of lines	Signal definition and function
Data	DATA	1	Display data signal. H: Turns on, L: Turns off
Clock	CLK	1	Display data timing signal. Reads data on the rising edge of CLK. The number of clock pulses during the $\overline{H_{SYNC}}$ period is 640.
Horizontal synchronizing signal	$\overline{H_{SYNC}}$	1	Horizontal data strobe. Moves address to the next line electrode on the falling edge of $\overline{H_{SYNC}}$. The number of $\overline{H_{SYNC}}$ pulses required during the $\overline{V_{SYNC}}$ period depends on the display mode. 400 line mode: $402 + 2N$ 200 line mode: $202 + N$ The horizontal synchronous signal must be applied at all times.
Vertical synchronizing signal	$\overline{V_{SYNC}}$	1	Screen start timing signal. Moves address to the first-row electrode on the falling edge of $\overline{V_{SYNC}}$.
Brightness control	B.CONT	1	Brightness control signal. H: 100% L: 50%


Display Mode Setting

640 × 400 dots	Non-interlaced mode (400-line mode). The standard mode enables a 400-line non-interlaced signal to be received and displayed.
640 × 200 dots	This mode enables operation with a 200-line non-interlaced signal and displays the 400-line unit in interlaced mode.

Interface Signal Timing Table (400 Line Mode)

Symbol	Min.	Nom.	Max.	Unit	Remarks
T _{VSYNC}	16.8	25		ms	Frame frequency: 40 Hz nominal
t _{WV}	2			μs	
t _{VH}	1			μs	
t _{HV}	2			μs	
T _{HSYNC}	40		47	μs	
t _{WM}	2			μs	
t _{MC}	1			μs	
t _{CM}	0.5			μs	
T _{CLK}	45	80	110	ns	
t _{WCLK1}	22	40		ns	
t _{WCLK2}	22	40		ns	t _{WCLK1} + t _{WCLK2} = T _{CLK}
t _{SUD}	20	40		ns	
t _{MD}	22	40		ns	


Mode setting (JP1)

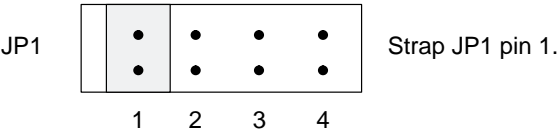


Interface Signal Timing Table (200 Line Mode)

Symbol	Min.	Nom.	Max.	Unit	Remarks
T_{VSYNC}	16.8	25		ms	Frame frequency: 40 Hz nominal
t_{WV}	2			μs	
t_{VH}	1			μs	
t_{HV}	2			μs	
T_{Hsync}	80		94	μs	
t_{WM}	2			μs	
t_{MC}	1			μs	
t_{CM}	0.5	3		μs	
T_{CLK}	45	80	110	ns	
t_{WCLK1}	22	40		ns	
t_{WCLK2}	22	40		ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{SUD}	20	40		ns	
t_{MD}	22	40		ns	


Mode setting (JP1)

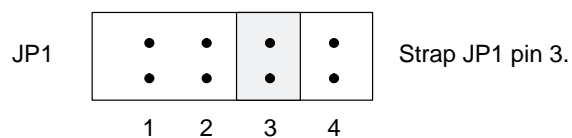


Interface Signal Timing Chart (400 Line Mode)

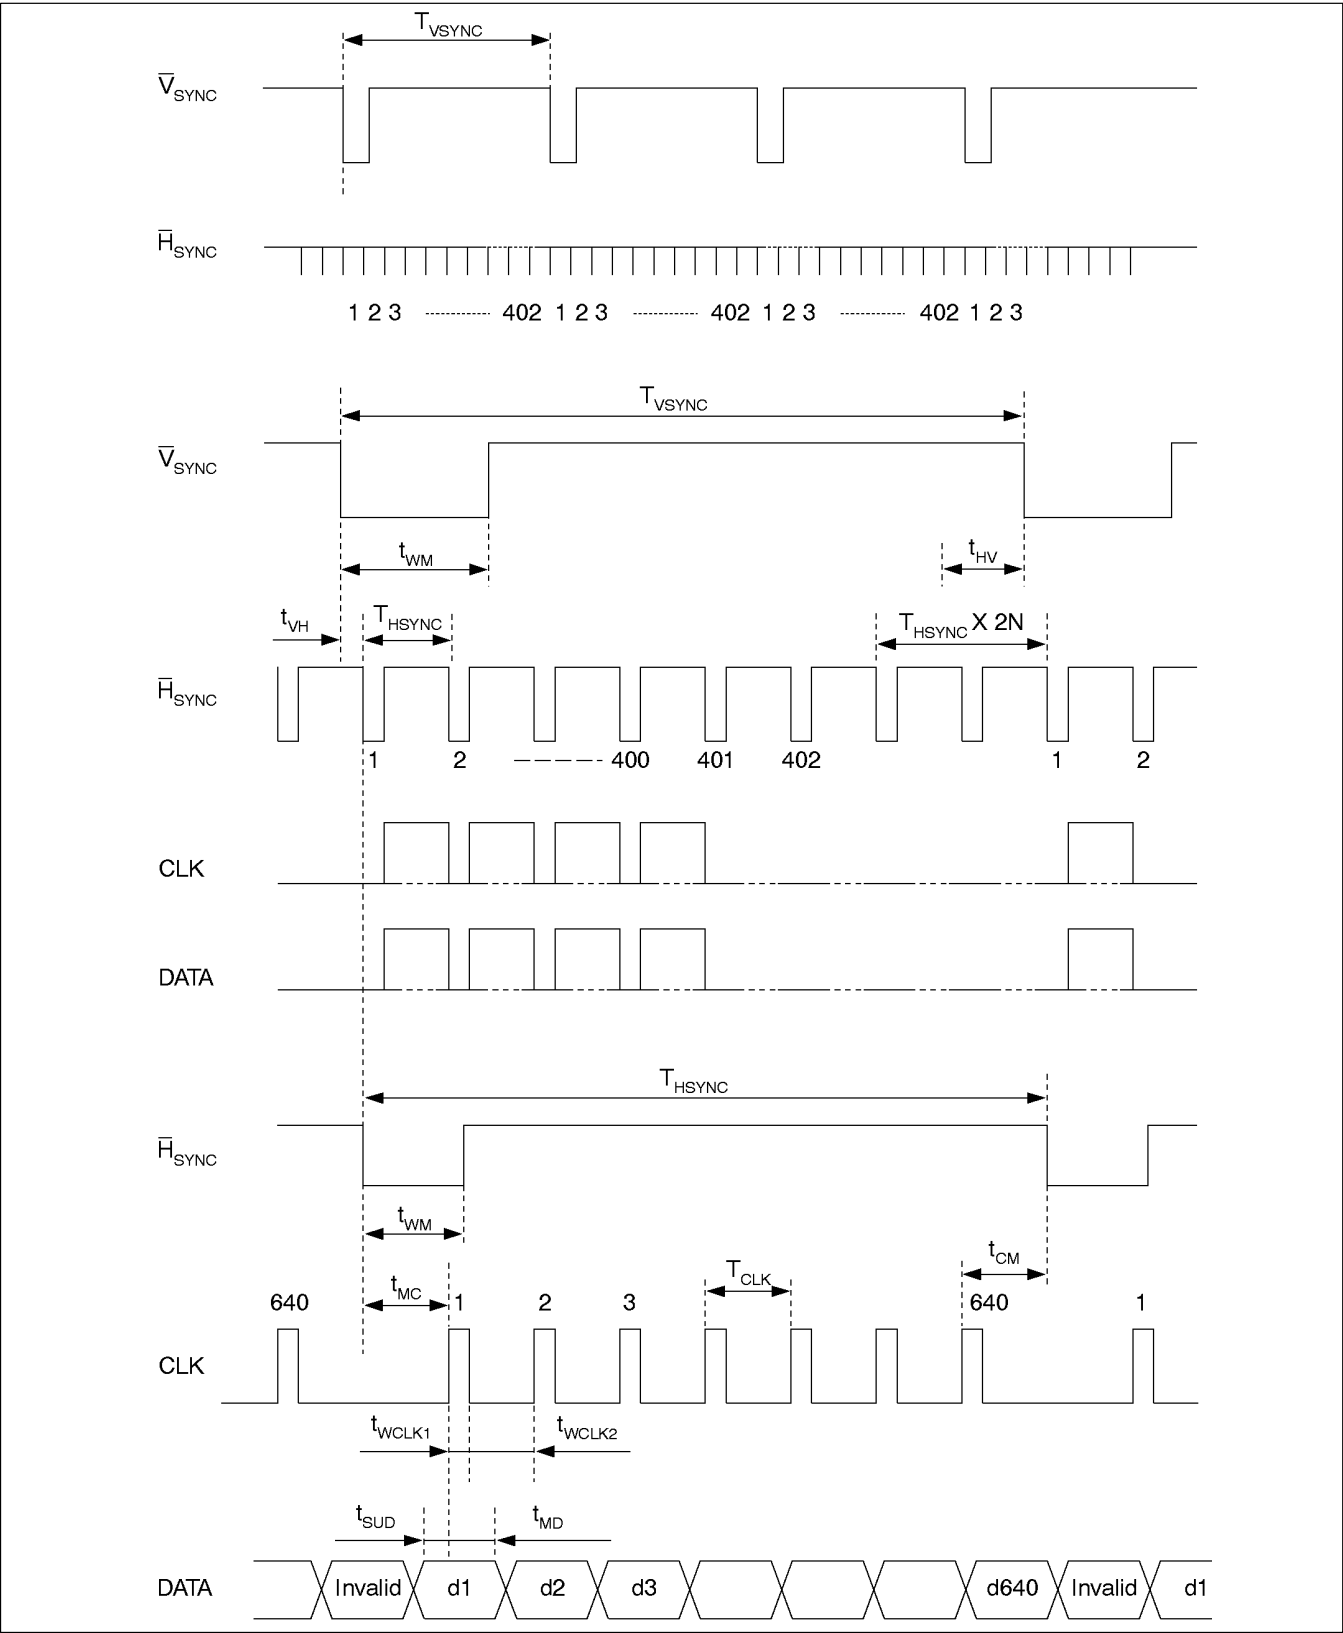

Interface Signal Timing Chart (200 Line Mode)

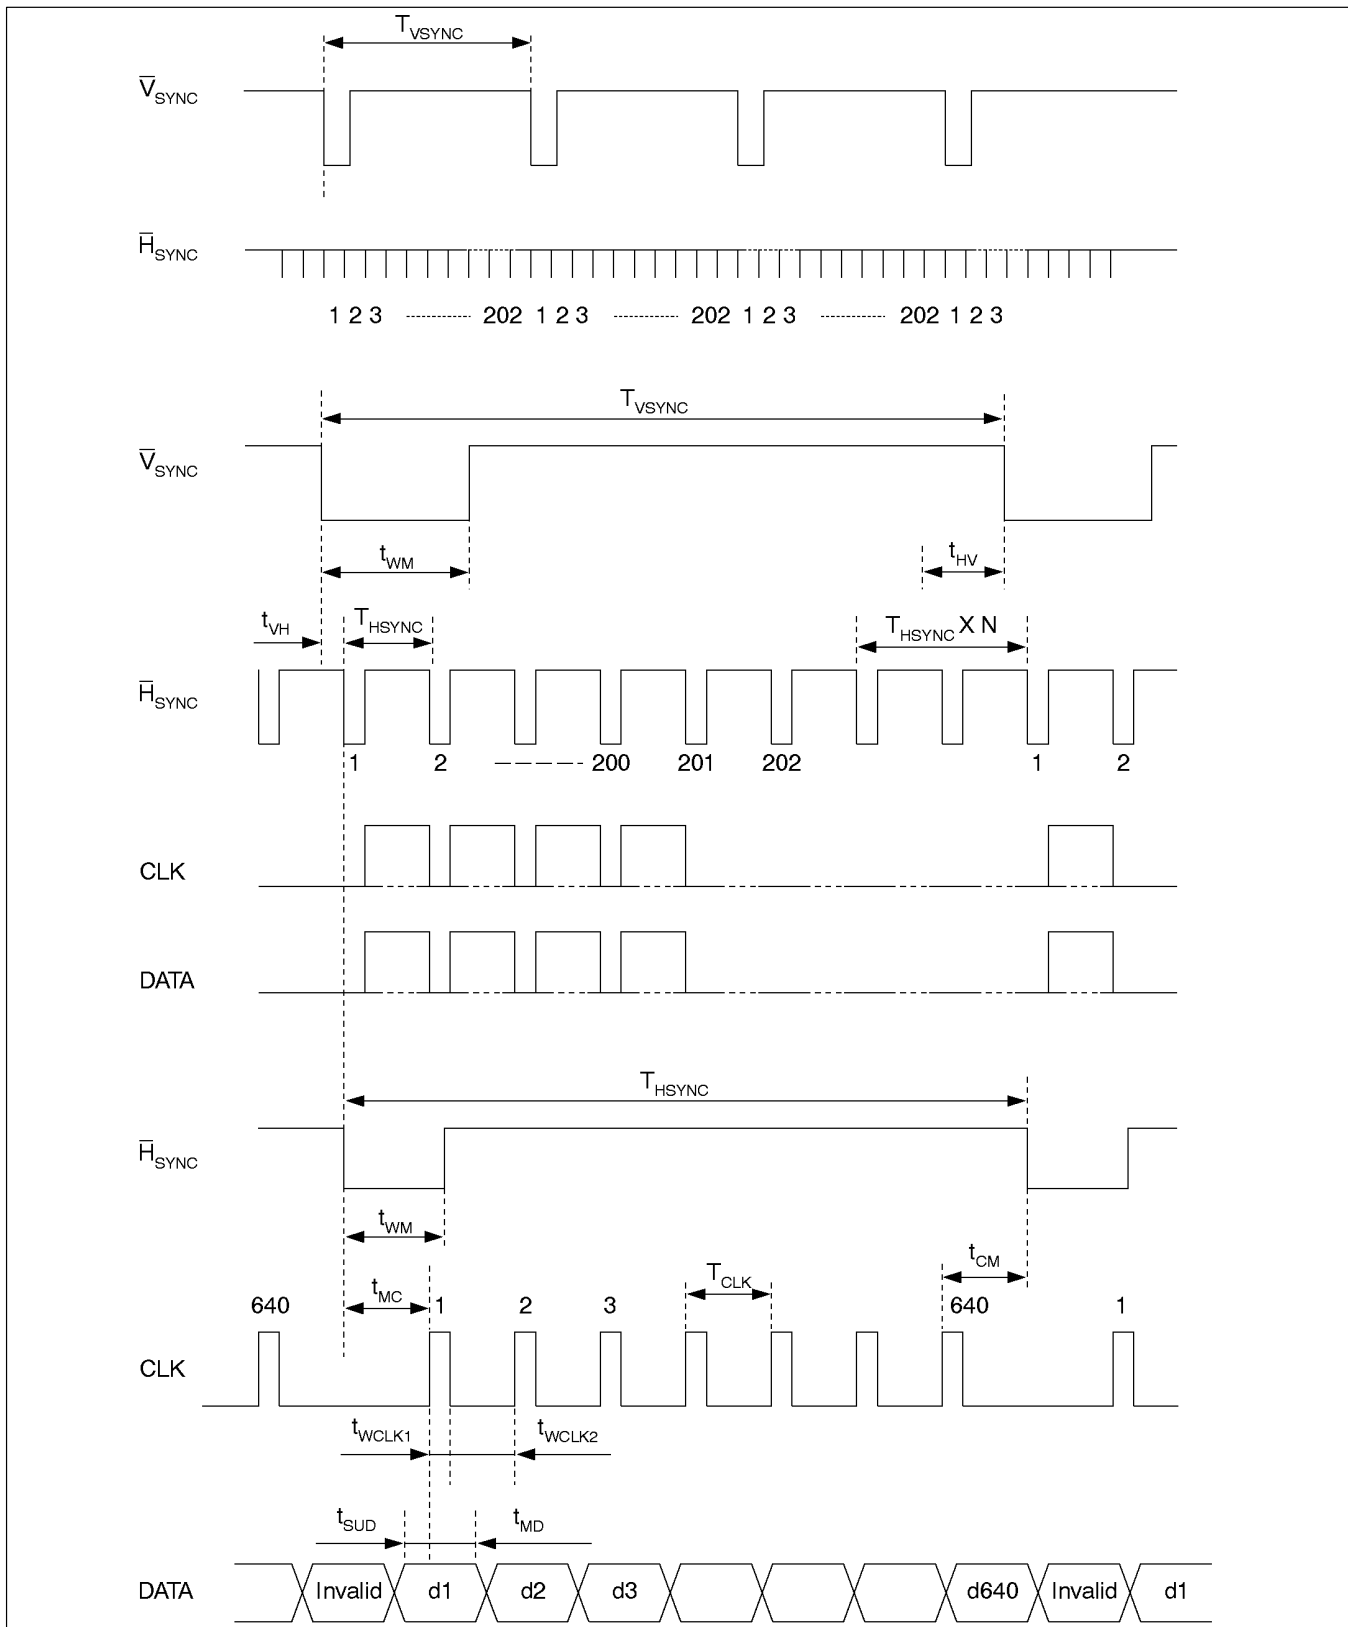

Interface Circuit (display)

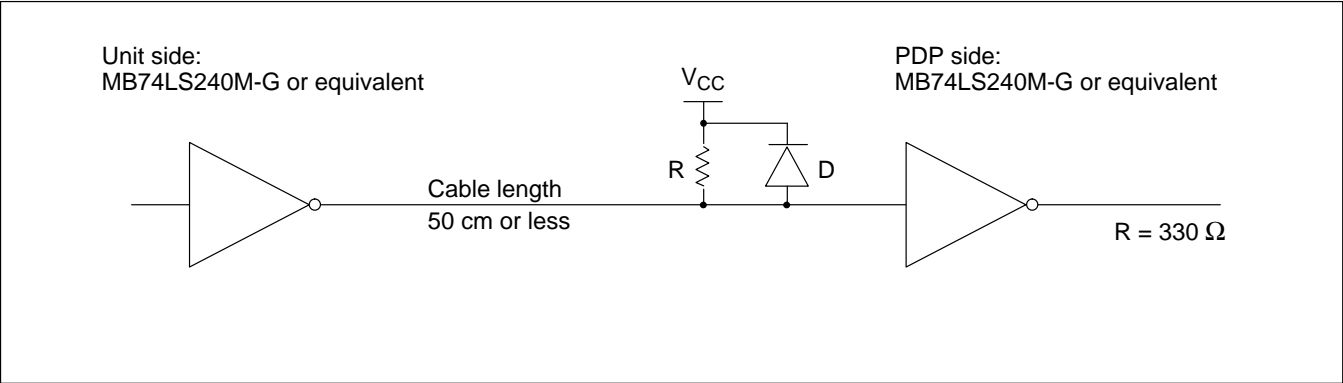


TOUCH PANEL SPECIFICATIONS

Touch Panel Interface Specification

Interface method	Conforms to EIA RS-232C
Baud rate	Rate can be automatically set to 300, 1200, 2400, 4800, 9600, or 19200 baud (start-stop).
Data configuration	Start bits (St): 1 bit Data (D0 to D7): 8 bits Parity (P): 1 bit, odd or even. Cannot be automatically set. Stop bits (SP): 2 bits


ST	2 ⁰	2 ¹	2 ²	2 ³	2 ⁴	2 ⁵	2 ⁶	2 ⁷	P	SP	SP
----	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	---	----	----

Interface Circuit (touch panel)

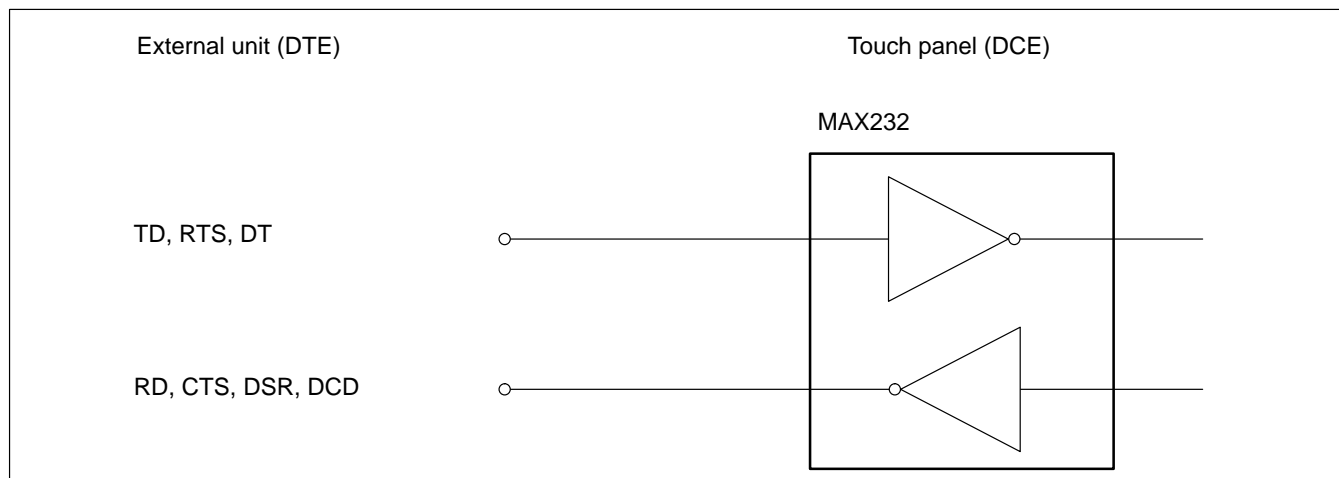


Coordinate Detection at Touch Panel

The coordinate input device of this touch panel has an effective touch area 210 mm wide and 133 mm high. It detects and converts to coordinates. The number of infrared ray emitting and receiving elements is 33 pairs wide and 21 pairs high. The origin is the upper left position.

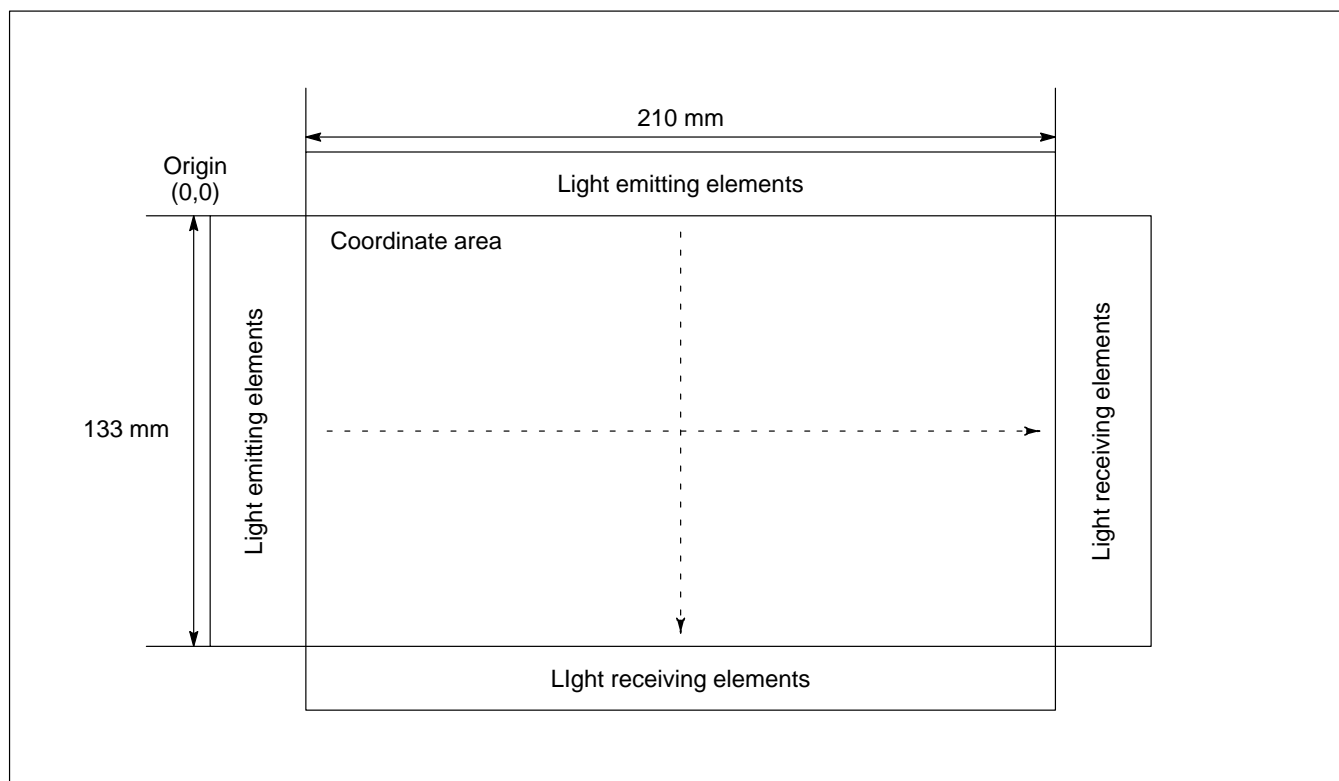

Display Position and Coordinate Position

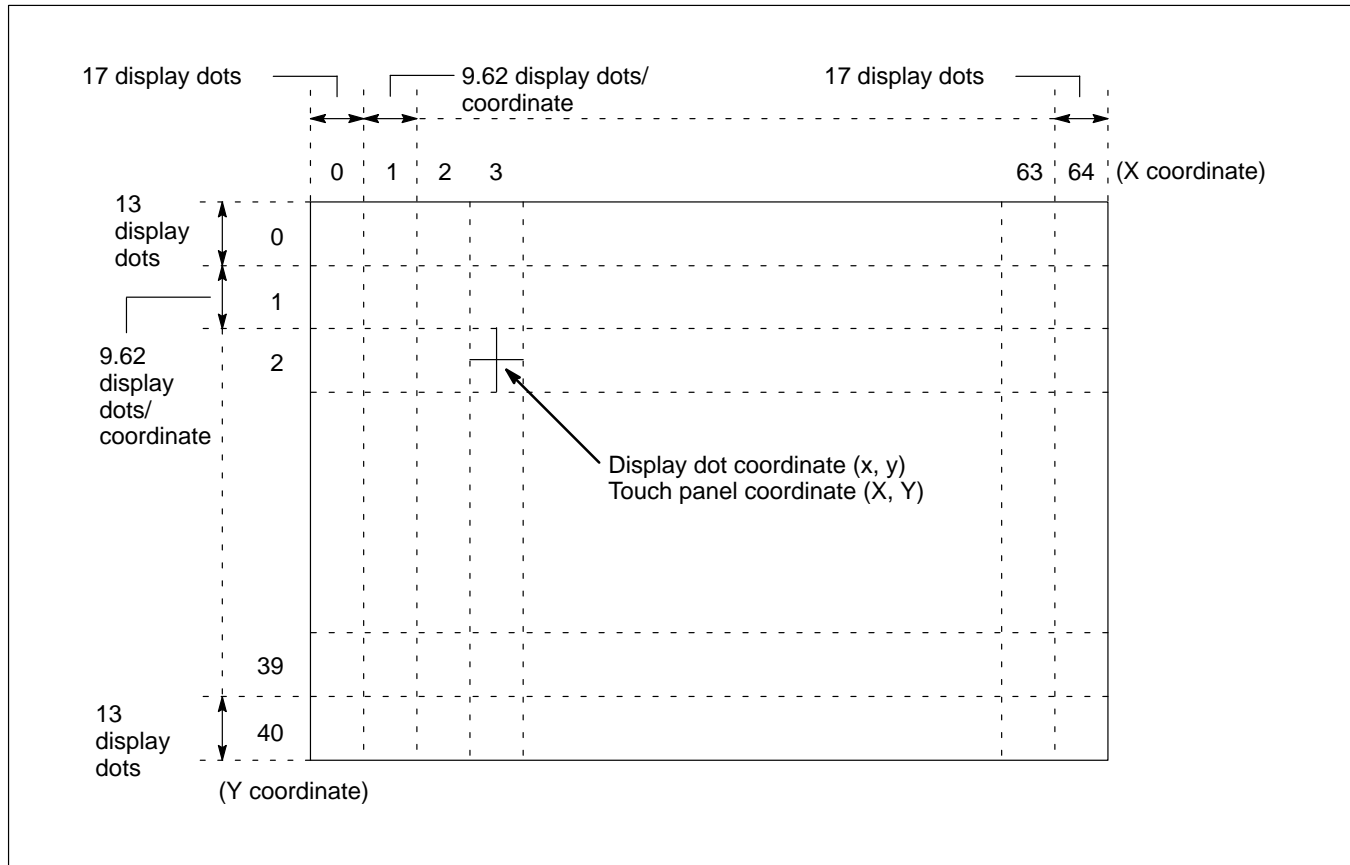

As shown in the above figure, when the display dot coordinate is (x, y), and the touch panel coordinate is (X, Y), their relationship can be represented by the following formulas:

$$\begin{cases} x = 9.62 \times (X - 0.5) + 17 & \pm 6 \\ y = 9.62 \times (Y - 0.5) + 13 & \pm 6 \end{cases}$$

↑
Touch panel fitting error

$$\begin{cases} X = (x - 17)/9.62 + 0.5 & \pm 1 \\ Y = (y - 13)/9.62 + 0.5 & \pm 1 \end{cases}$$


↑
Touch panel fitting error

Round to the nearest unit

Detection Coordinate Transfer Mode

(1) Scan mode


Assigns a beam number to each light-emitting element, and transfers the intercepted beam number.

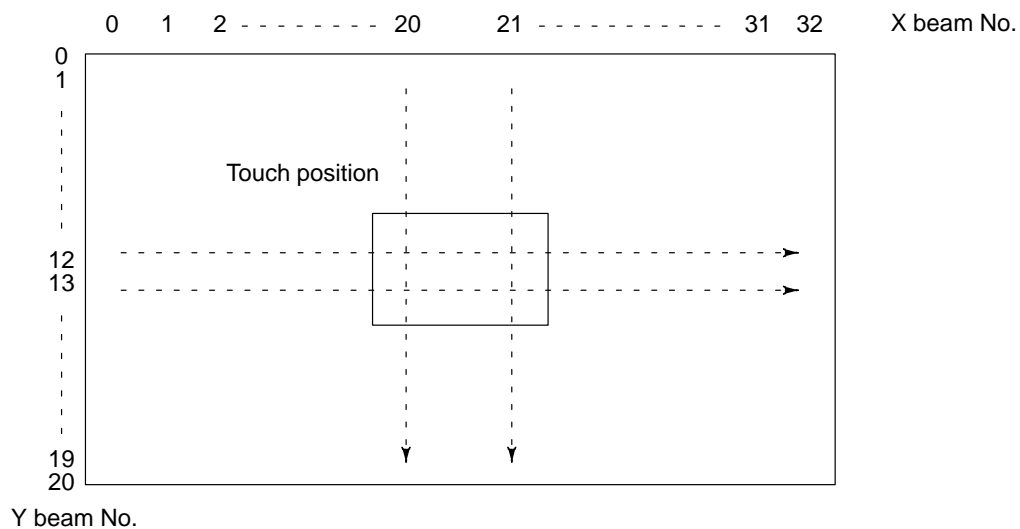

X beam Nos. 20 and 21, and Y beam Nos. 12 and 13 are transferred.

(2) Coordinate mode

Divides the touch coordinate area into coordinates from X = 0 to 64 and Y = 0 to 40, and transfers the touch position coordinate.

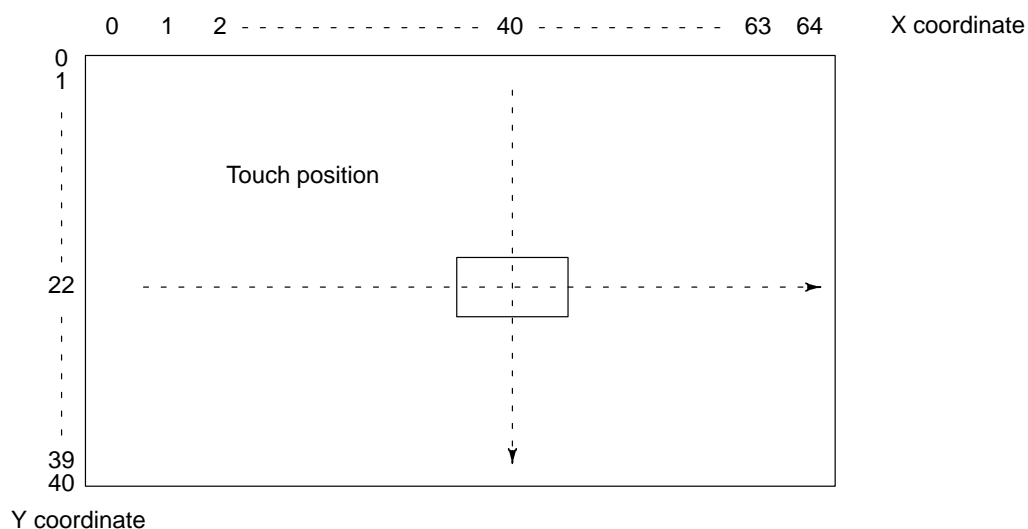

X-coordinate 40 and Y-coordinate 22 are transferred.

Notes: 1. If a touch is broad and two or more beams are intercepted, the coordinate at the center of the touch is transferred.
2. If two or more beams are intercepted and they are not adjacent to each other (if touches occur at separate locations simultaneously), coordinates are not transferred, and a non-adjacent hit code is transferred.

Detection Operation Mode

Input point operation	Transfers the coordinates of the position touched first, and does not transfer the next coordinates until pressure is released.
Track operation	Transfers touch coordinates as long as the pressure is moving within the coordinate area. Does not transfer coordinates when pressure is released.
Continuous operation	Transfers touch coordinates as long as the pressure is within the coordinate area. Transfers touch coordinates even when pressure is released.
End point operation	Transfers coordinates of the point at which pressure is released.
Additional end point operation	In addition to input point operation, follow-up operation, and continuous operation, transfers the coordinates of the point at which pressure is released.

(1) Control commands

Item	Command	Code	Function
1	Reset	3C	Clears all buffers and resets the touch system.
2	Echo mode ON	20	Sends all the received data back to the host computer.
3	Echo mode OFF	21	Turns the echo mode OFF.
4	Touch system ON	2A	Starts touch system scanning.
5	Touch system OFF	2B	Stops touch system scanning.
6	Scan mode setting	22	Sets the detection coordinate mode to the scan mode.
7	Coordinate mode setting	23	Sets the detection coordinate mode to coordinate mode.
8	Input point operation	25	Sets the detection operation mode to input point operation.
9	Follow-up operation	26	Sets the detection operation mode to follow-up operation.
10	Continuous operation	27	Sets the detection operation mode to continuous operation.
11	End-point operation	28	Sets the detection operation mode to the end-point operation.
12	Additional end-point operation	29	Adds the end-point operation, as well as the operations in each detection operation mode. (This command is not used when the end-point operation is set.)
13	Status report	32	Reports the touch system status.
14	Configuration report	33	Reports the number of processors in the touch system.
15	Firmware version report	34	Reports the firmware ROM version.
16	Improper-beam analysis	36	Reports the opto-device status.
17	Frame size report	37	Reports the frame size.
18	Self-diagnostic report	3A	Executes self-diagnostics, and reports the status.
19	Clear	3D	Clears the touch report buffer.
20	Hardware flow control ON	41	Turns hardware handshaking on the serial interface on.
21	Hardware flow control OFF	42	Turns hardware handshaking on the serial interface off.
22	Data transfer ON	44	Enables data transfer.
23	Data transfer OFF	43	Inhibits data transfer.
24	Baud rate/parity reset	45	Return to the data transfer rate and parity setting mode.
25	Touch state report	47	Reports the operation setting status of the touch system.
26	Single report	46	Transfers reports to the host computer report-by-report.

Note: The code is hexadecimal.

(2) Baud rate/parity automatic setting

Shall be set by transferring code (0D) and the Reset command.

(2) Default set values

- i. Touch system: OFF
- ii. Detection coordinate transfer mode: Coordinate mode
- iii. Detection operation mode: Follow-up operation
- iv. Additional end-point operation: OFF
- v. Data transfer: OFF
- vi. Hardware flow control: OFF

CONNECTOR PIN ASSIGNMENT**Signal Connector****FCN-705Q016-AU/M**

Pin No.	Signal Name	Symbol	Signal Direction		
			Touch Panel (DCE)		External Unit (DTE)
1	Transmit data	TD	←		
2	Receive data	RD	→		
3	Request to send	RTS	←		
4	Clear to send	CTS	→		
5	Data terminal ready	DTR	←		
6	Data set ready	DSR	→		
7	Data carrier detected	DCD	→		
8	Signal ground	SG			
9	Signal ground	SG			
10	Power ground	GND			
11	Power ground	GND			
12	Frame ground	FG			
13	+5 V	V _{DD}			
14	+5 V	V _{DD}			
15	+5 V	V _{DD}			
16	+5 V	V _{DD}			

Note: Mating connector: FCN-707B016-AU/B

FTE8050BP

Display Signal Connector

FCN-605Q016-G/S

Pin No.	Signal Name	Pin No.	Signal Name
1	N.C.	2	N.C.
3	N.C.	4	S.GND
5	DATA	6	S.GND
7	N.C.	8	S.GND
9	$\overline{H_{\text{SYNC}}}$	10	S.GND
11	$\overline{V_{\text{SYNC}}}$	12	S.GND
13	B.CONT	14	S.GND
15	CLK	16	S.GND

Notes: Mating connector: FCN-607B016-G/D, no strain relief
Leave N.C. unconnected.

Power Supply Connector

Pin No.	Symbol
1	V_{CC} (Logic)
2	GND(L) (for V_{CC})
3	$-V_{\text{S}}$ (Sustain driver)
4	GND(H) (for $+V_{\text{S}}$, V_{W} , V_{E})
5	$+V_{\text{S}}$ (Sustain driver)
6	V_{W} (Write driver)
7	N.C.
8	V_{E} (Line control driver)
9	N.C.

Adaptable connectors: FCN-813J009-A, housing
FCN-813J-T/Q, contact (for manual operation)
FCN-813J-T/R, contact (for automatic device)


FTE8050BPE

Plasma Display Unit with Touch Panel

The FTE8050BPE plasma display unit is a human-machine interface that provides both screen display and input functions in a single unit. This unit consists of a 9-inch plasma display with an integrated optical touch panel.


The display unit employs a 640×400 dot AC memory plasma display with high brightness, high contrast, and a wide viewing angle. The optical touch panel has its own internal controller, with coordinate sensing resolution of 3.025×3.550 mm (0.12×0.14 in.) for high-resolution, touch-input applications.

A built-in anti-glare filter eliminates reflection from external light sources. The exclusive bezel design protects the light-sensing and emission elements from dust and other contaminants.

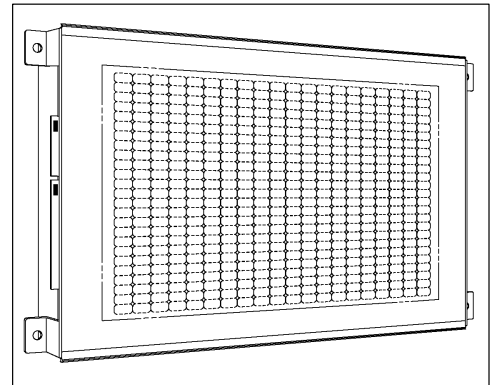

- Integrated display and touch panel with no visible degradation in display quality
- Compact, thin design
- Anti-glare filter with bezel
- Compact, thin construction
- Standard interface
- Applications:
 - Transaction terminals, ATM terminals, and other banking and securities applications
 - Factory automation devices such as Numeric Control (NC) controllers, robots, programmable controllers, injection molding machines, or semiconductor fabrication equipment
 - Many types of automated ticket vending machines
 - Medical equipment, such as CT scanners


BLOCK DIAGRAM

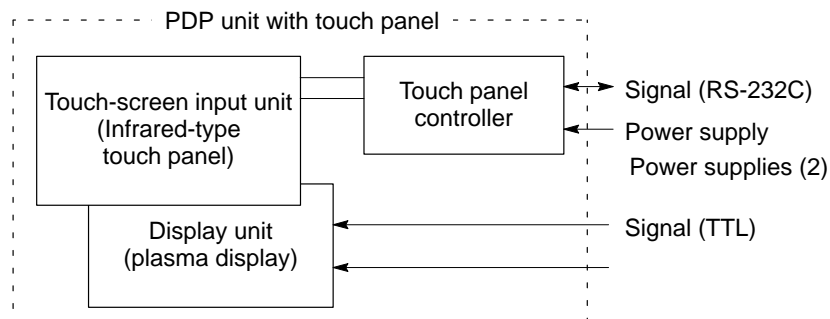

SPECIFICATIONS

Item		Specification
Display Unit	Display Capacity	640 (horizontal) x 400 (vertical) dots
	Dot Pitch	0.3 (horizontal) x 0.3 (vertical) mm (0.012 x 0.012 in.)
	Dot Size	0.2 mm (approx.) (0.008 in.)
	Effective Display Size	191.7 (horizontal) x 119.7 (vertical) mm (7.55 x 4.71 in.)
	Display Color	Neon orange
	Gray Scale	4-level (approx. 100, 67, 33, and 0%)
	Brightness	Spot: 90 cd/m ² (typical) Plane: 11 cd/m ² (typical)
	Contrast	1 : 20 minimum
	Viewing Angle	120° or more (80 degrees at periphery)
	Interface	CRT conformity TTL
	Brightness Adjustment	0 to 100% by BC signal
	Power Supply	2 supplies (5V, 95V)
	Power Consumption	16W (typical)
Touch Input Unit	Coordinate Sensing Range	Infrared sensing and emission element
	Coordinate Sensing Range	192 (horizontal) x 120 (vertical) mm (7.56 x 4.72 in.)
	Sensing Resolution	3.025 (horizontal) x 3.550 (vertical) mm (0.12 x 0.14 in.)
	Coordinate Sensing Interval	50 ms (typical)
	Screen Filter	Non-glare filter
	Interface	RS-232C conformity Data format: 1 start bit, 8 data bits, 1 parity bit, 2 stop bits Baud rates: 300, 1200, 2400, 4800, 9600, 19200 bps (automatic setting)
	Power Supply	+5V (±5%)
	Power Consumption	400 mA (maximum)
Environment temperature		0 to 50°C (changes within 11.5°C/min.)
External Dimensions		257 (W) x 170 (H) x 77 (D) mm (10.1 in. x 6.7 in. x 3.0 in.)
Weight		Approximately 1.9 kg (4.2 lbs.)

External Dimensions

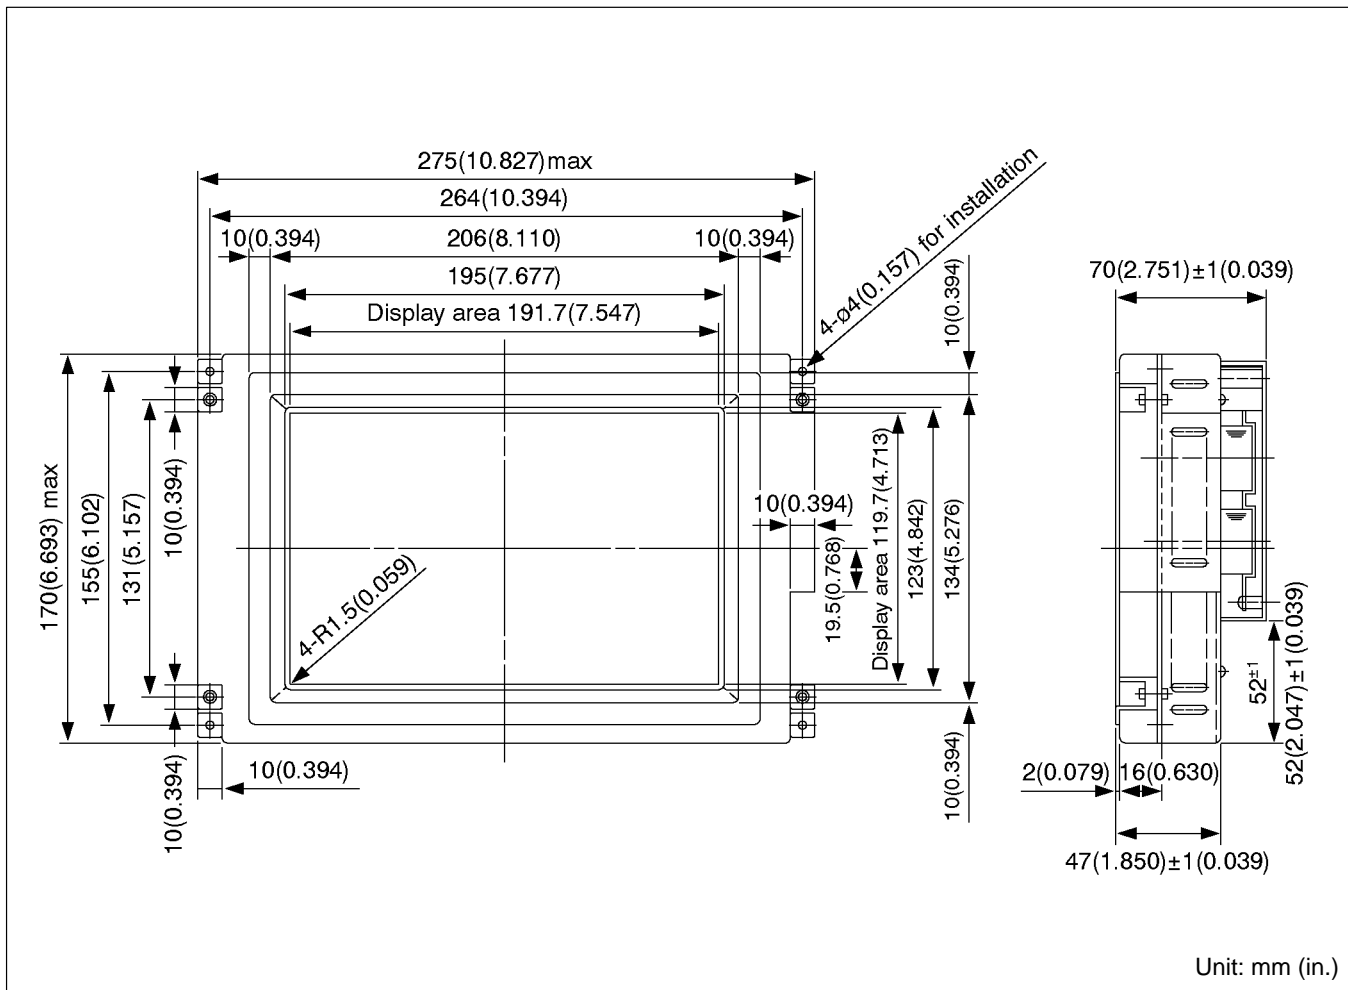

CONNECTOR PIN ASSIGNMENT**Signal Connector**

(Connector used: FCN-605Q026-G/S)

Pin No.	Signal Name	Pin No.	Signal Name
1	$\overline{V_{\text{SYNC}}}$	2	S. GND
3	$\overline{F_{\text{SYNC}}}$	4	S. GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S. GND
15	D0	16	S. GND
17	D1	18	S. GND
19	CLK	20	S. GND
21	B.C.	22	N.C.
23	N.C.	24	N.C.
25	N.C. (V_{CC})	26	N.C. (V_{CC})

Combination connector: FCN-607B026-G/D

Power Supply Connector

(Connector used: FCN-814P-009TA)

Pin No.	Signal Name
1	V_{CC}
2	GND
3	N.C.
4	GND
5	V_{E}
6	N.C.
7	N.C.
8	GND
9	V_{R}

Combination connector housing: FCN-813J009-A
Contact: FCN-813J-T/Q**Touch Panel Unit Signal**

(Connector: FCN-705Q016 AU/M)


Pin No.	Signal Name	Symbol	Pin No.	Signal Name	Symbol
1	Transmit data	TD	2	Receive data	RD
3	Request to send	RTS	4	Clear to send	CTS
5	Data terminal ready	DTR	6	Data set ready	DSR
7	Data carrier detect	DCD	8	Signal ground	SG
9	Signal ground	SG	10	Power ground	GND
11	Power ground	GND	12	Frame ground	FG
13	+5 V	V_{DD}	14	+5 V	V_{DD}
15	+5 V	V_{DD}	16	+5 V	V_{DD}

FTE8060BPC

Plasma Display Unit with Touch Panel


The FTE8060BPC is a human-machine interface that provides both screen display and input functions. The display provides clear images by employing an 11.4-inch display area with 640 x 480-dot resolution.

The display unit can be connected using a standard cathode ray tube controller (CRTC) and the touch panel employs an RS-232C interface.

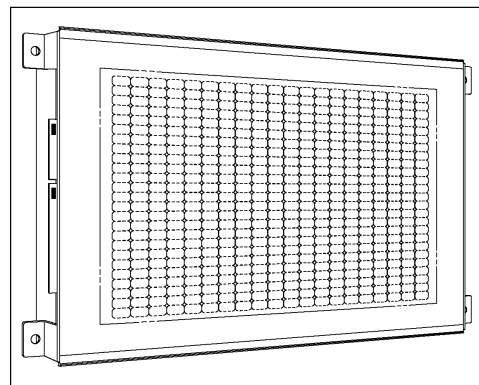

- Integrated display and touch panel
- Clear, bright display
- Long display life without brightness deterioration
- Compact, thin construction
- Standard interface
- Applications:
 - Medical equipment, measuring instruments, and analyzers
 - Factory automation devices, such as Numeric Control (NC) controllers, robots, programmable controllers, equipment for automatic installation of electronic components, semiconductor/LCD manufacturing equipment, and projection formation equipment
 - Various types of ticket issuing terminals
 - Transaction terminals, such as ATM machines, and other banking and securities applications
 - Distribution terminals, such as point-of-sale (POS) terminals

BLOCK DIAGRAM

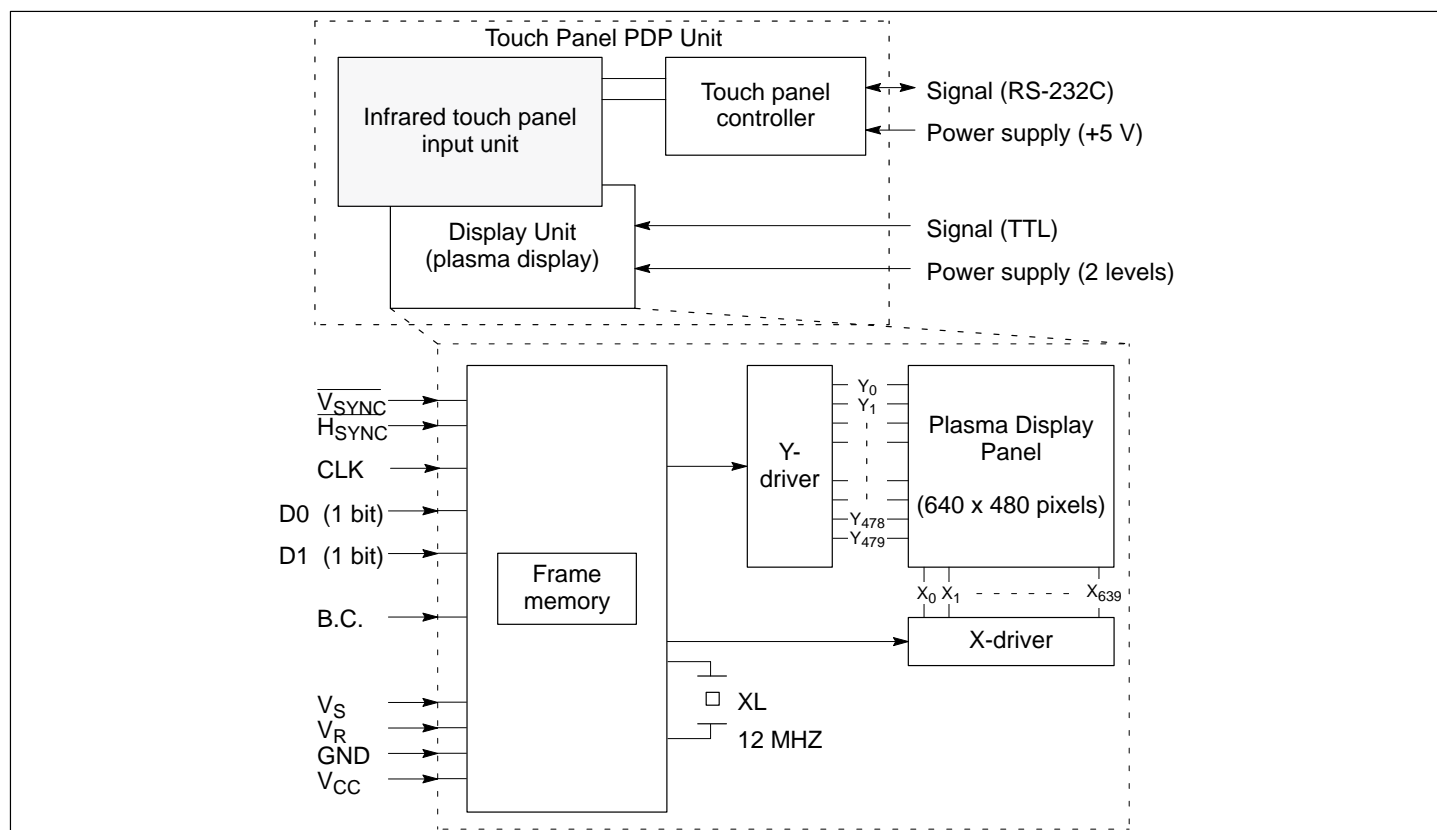

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Parameter		Symbol	Absolute ratings
Display unit	For sustain driver	V_S	+125 V
	For logic	V_{CC}	+7 V
Touch panel unit	For touch panel driver	V_{CC}	+5.5 V

Display Unit DC Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
High-level input voltage	V_{IH}	—	2.0	—	5.25	V
Low-level input voltage	V_{IL}	—	−0.5	—	0.8	V
High-level input current	I_{IH}	$V_I = 2.75\text{ V}$, $V_{CC} = 5.25\text{ V}$	—	—	20	μA
Low-level input current	I_{IH}	$V_I = 0.4\text{ V}$, $V_{CC} = 5.25\text{ V}$	—	—	−16	mA

Touch Panel DC Characteristics

Parameter	Symbol	Reference voltage (V)	Tolerance to power supply fluctuation	Ripple and noise (maximum limit)	Current	
					Typical	Maximum
For touch panel driver	V_{DD}	+5	±5%	100 mV _{PP}	—	650 mA

Display Unit Input Power Supply

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Display	Supply Voltage ^{1,2}	V_S	Variable	88	95	100.5	V
	Ripple and noise	V_{NRS}	Determined by load resistance	—	—	500	mV
	Stability (average)	—	Determined by load resistance	—	—	± 1.5	%
	Setting precision	—	Deviation from Expression 1	—	—	± 0.5	%
	Stability (peak)	—	($I_S = 2A$)	—	—	-5	%
	Current (average) ^{3,4}	I_S	Horizontal cycle = 42 μs /line	50	200	400	mA
	Current (peak)	I_{SP}	Width shall be 1 μs with $I_{SP} = 1A$ at a cycle of 5 to 8 μs	0.5	—	2	A
Logic	Supply Voltage	V_{CC}	May be fixed	4.75	5.0	5.25	V
	Ripple and noise	V_{NRS}	Determined by load resistance	—	—	200	mV
	Stability (average)	—	Determined by load resistance	—	—	± 5	%
	Current (average)	I_{CC}		150	250	500	mA

Notes: ¹ A power supply variable from 88 V to 100.5 V is required, because the display voltage V_S differs with each unit.

² The setting of V_S is described on a label attached to each unit. V_S can be automatically set by using the reference voltage V_R . The relationship between V_S and V_R is explained in the note for the Display Unit Output Power Supply table.

³ The following conditions are assumed for the value of current I_S .

Minimum: Display ratio (lighting ratio) = 0%

Typical: Display ratio (lighting ratio) = 33% ("B" displayed on the entire screen)

Maximum: Display ratio (lighting ratio) = 100%

⁴ Current I_S (and brightness) is inversely proportional to the horizontal frequency. A horizontal frequency of 31 μs /line is assumed for the above values.

⁵ I_S (for display) is 0 mA (no load) under the following conditions:

V_{CC} is not supplied,

Two frames after V_{CC} are supplied. (After three vertical pulses are input, operation starts.)

There is no horizontal synchronization signal input.

There is no clock input.

Display Unit Output Power Supply

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
For V_S specification	Voltage	V_R ¹	With 1 k Ω load	0	—	2.5	V
	Ripple and noise	V_{NRR}	With 1 k Ω load	—	—	± 500	mV
	Stability (average)	—	With 1 k Ω load	—	—	± 0.1	%
	Current (average)	I_{CC}	With 1 k Ω load	—	—	10	mA

Note: ¹ V_R is related to V_S as follows:

$$V_S = 88 + 5 \times V_R$$

Example: When $V_S = 93$ V, $V_R = 1.0$ V

MECHANICAL SPECIFICATIONS

Physical Specifications (Display)

Item		Value
Number of Display Dots		640 (H) × 480 (V) dots (307,200 dots)
Dot Pitch		0.36 (H) × 0.36 (V) mm (0.014 × 0.014 in.)
Dot Size		0.2 mm (0.008 in.)
Effective Screen Size		230.04 (H) × 172.44 (V) mm (9.057 × 6.789 in.)
Gray Scale		4 levels (approximately 100%, 67%, 33%, and 0%)
Display Color		Neon orange
Brightness	peak	88 cd/m ² typical
	average	12 cd/m ² typical
Brightness Control		Variable from 0 to 100% (using BC signal)
Contrast Ratio		20 : 1 minimum
Viewing Angle		120 degrees minimum
Brightness Unevenness		50% maximum (the average brightness variation between any two points 10 mm apart shall not exceed 30%)
Weight		Approximately 2 kg
External Dimensions		See External Dimensions Figure

Physical Specifications (Touch Input)


Item	Value
Number of Elements	42 (H) × 26 (V)
Detection Area	231 (H) × 171.6 (V) mm (9.095 × 6.756 in.)
Resolution	2.75 (H) × 3.3 (V) mm (0.108 × 0.130 in.)
Minimum Stylus Size	9.2 mm (0.362 in.)
Surface Filter Treatment	Non-glare treatment
Origin of Coordinates	The coordinates at the left end of the detection shall be (0,0)

Performance Specifications

Item	Value
Operating Temperature	0 to 50°C
Storage Temperature	–20 to +70°C
Humidity	30 to 85% RH (no condensation)
Atmospheric Pressure Durability	Operation: 700 to 1114 hPa Non-operation: 340 to 1114 hPa
Vibration Acceleration:	Operation: 0.5 G maximum Non-operation: 2 G maximum
Frequency:	10 to 55 Hz to 10 Hz/minute
Time:	Operation: 20 minutes in X, Y, and Z direction Non-operation: 20 minutes in X, Y, and Z direction
Shock (at non-operation) Acceleration:	20 G max. in X, Y, and Z direction
Time:	11 ms maximum
Press force	1 kg maximum at touch panel surface

FTE8060BPC

External Dimensions

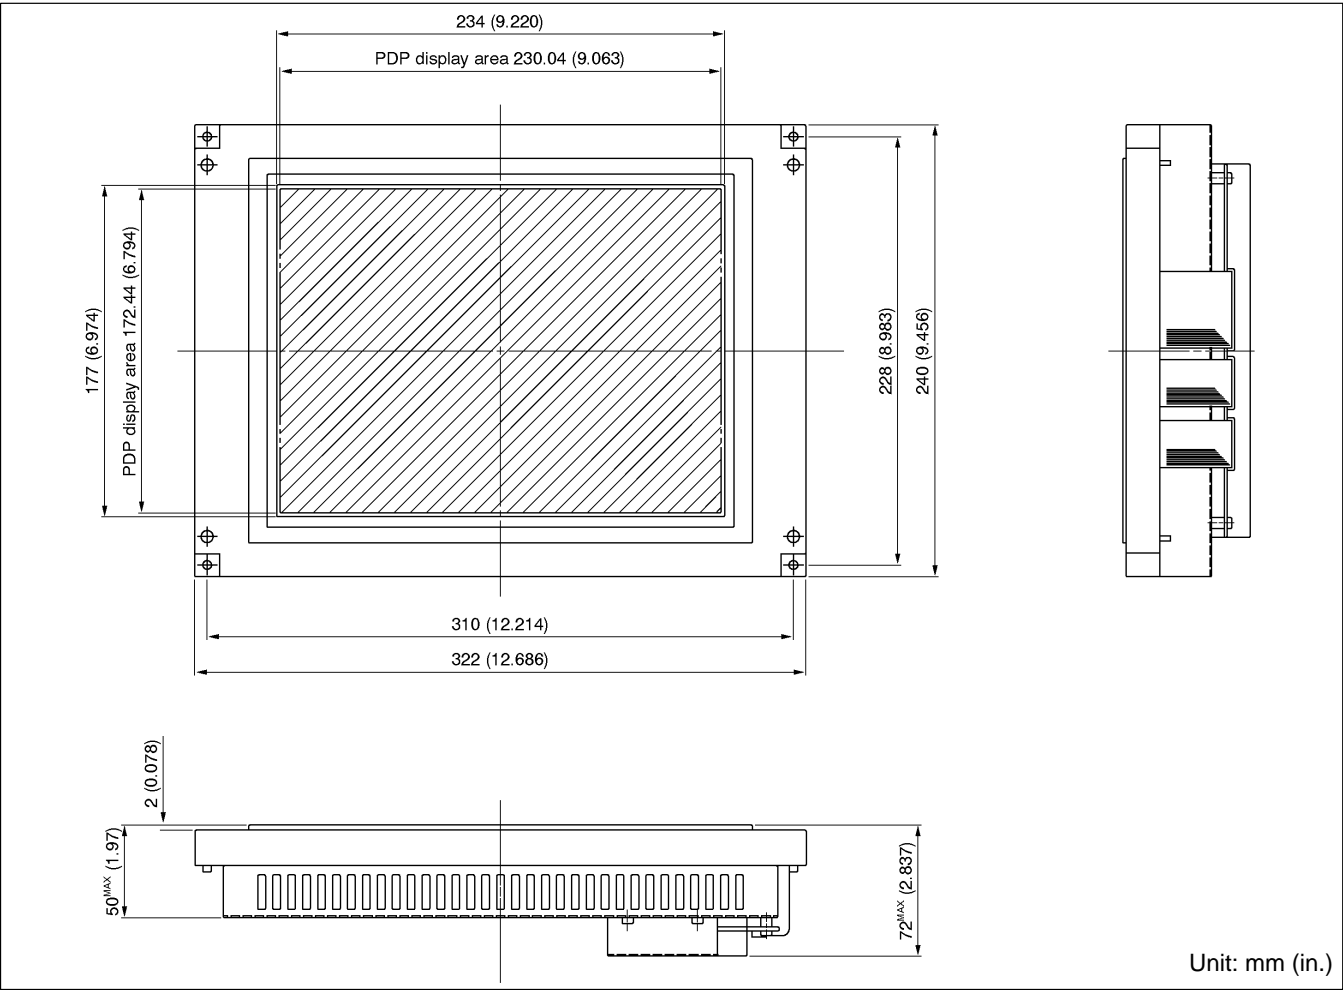

INTERFACE SIGNALS (DISPLAY)

Types of Signals

Name of Signal	Symbol	Data Line	Definition and Function															
Data	D0 D1	2	Display data signal. Logic: High: Lit, Low: Not lit Relationship Between Data and Gray Scale Level ¹ <table><tr><th>D1</th><th>D0</th><th>Gray scale (relative value)</th></tr><tr><td>0</td><td>0</td><td>Dark (0)</td></tr><tr><td>0</td><td>1</td><td>Low (33%)</td></tr><tr><td>1</td><td>0</td><td>Medium (67%)</td></tr><tr><td>1</td><td>1</td><td>High (100%)</td></tr></table>	D1	D0	Gray scale (relative value)	0	0	Dark (0)	0	1	Low (33%)	1	0	Medium (67%)	1	1	High (100%)
D1	D0	Gray scale (relative value)																
0	0	Dark (0)																
0	1	Low (33%)																
1	0	Medium (67%)																
1	1	High (100%)																
Clock	CLK	1	Display data timing signal. Data is read at the rising edge of the clock. Note: There are 640 clocks during the $\overline{H_{SYNC}}$ period.															
Horizontal Synchronization	$\overline{H_{SYNC}}$	1	Signal which determines the data period for one horizontal line. The address shifts to the electrode of the next line at the falling edge of $\overline{H_{SYNC}}$. The number of $\overline{H_{SYNC}}$ signals required for the $\overline{V_{SYNC}}$ period is $402 + 2N$. Note: Always enter horizontal synchronization signals at the same intervals.															
Vertical Synchronization	$\overline{V_{SYNC}}$	1	Timing signal to control screen start. The address shifts to the electrode of the first column on the falling edge of $\overline{V_{SYNC}}$.															
Brightness Control	B.C.	1	Brightness control signal. High: Lit, Low: Not lit															

Note: ¹The gray scale levels (relative values) are defined by the following expressions:

Low $B_L = a/V \times 100\%$
 Medium $B_M = (V-a)/V \times 100\%$
 High $B_H = 1 \times 100\%$

a: Internal unit constant, set to 169


V: Number of horizontal cycles in a vertical period

Interface Signal Timing Table

Symbol	Min.	Typ.	Max.	Unit	Remarks
T_{VSYNC}		16.7	20	ms	Frame Frequency: Standard 60 Hz
t_{WV}	—	—	—		This time period shall exceed one $\overline{H_{SYNC}}$ cycle.
t_{VH}	1	—	—	μs	
t_{HV}	2	—	—	μs	
T_{Hsync}	31	—	—	μs	
t_{WH}	2	5	—	μs	
t_{HC}	2	—	—	μs	
t_{CH}	2	3	—	μs	
T_{CLK}	44	—	—	ns	
t_{WCLK1}	22	—	—	ns	
t_{WCLK2}	22	—	—	ns	$t_{WCLK1} + t_{WCLK2} = T_{CLK}$
t_{SUD}	22	—	—	ns	
t_{HD}	22	—	—	ns	

Note: Current and intensity are inversely proportional to the horizontal frequency (1/H).

Interface Signal Timing Chart

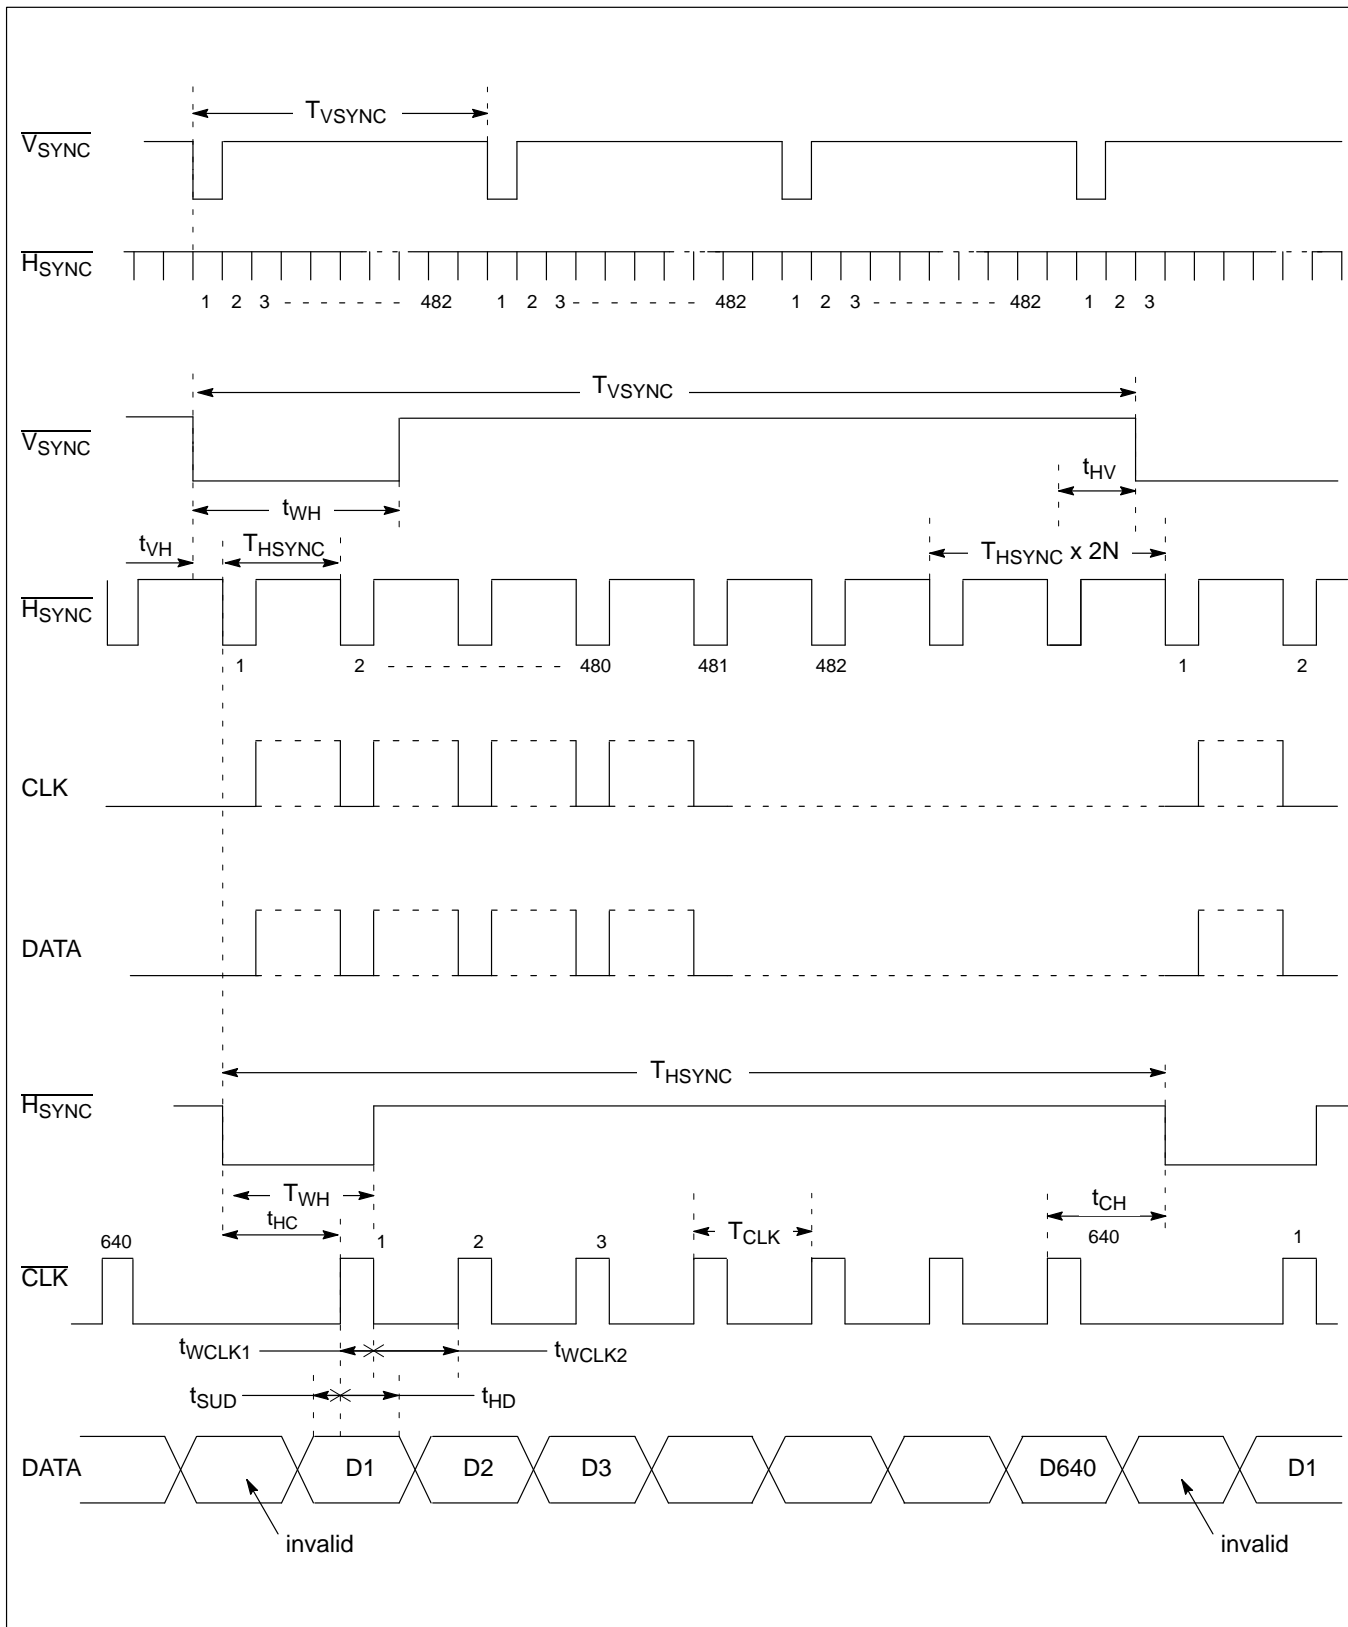


Brightness Control Signal Timing

Symbol	Minimum	Nominal	Maximum	Unit	Remarks
T _B	—	2 x V/N	—	H	H: Horizontal cycle
T _{BK}	—	—	2 x V/N	H	


Notes: ¹V: Vertical/horizontal synchronization (number of lines per 1 V period)
²N: Integer
³The display brightness can be varied between 0 and 100% by controlling the B.C. pulse duty cycle.

Brightness Control Signal Timing Chart

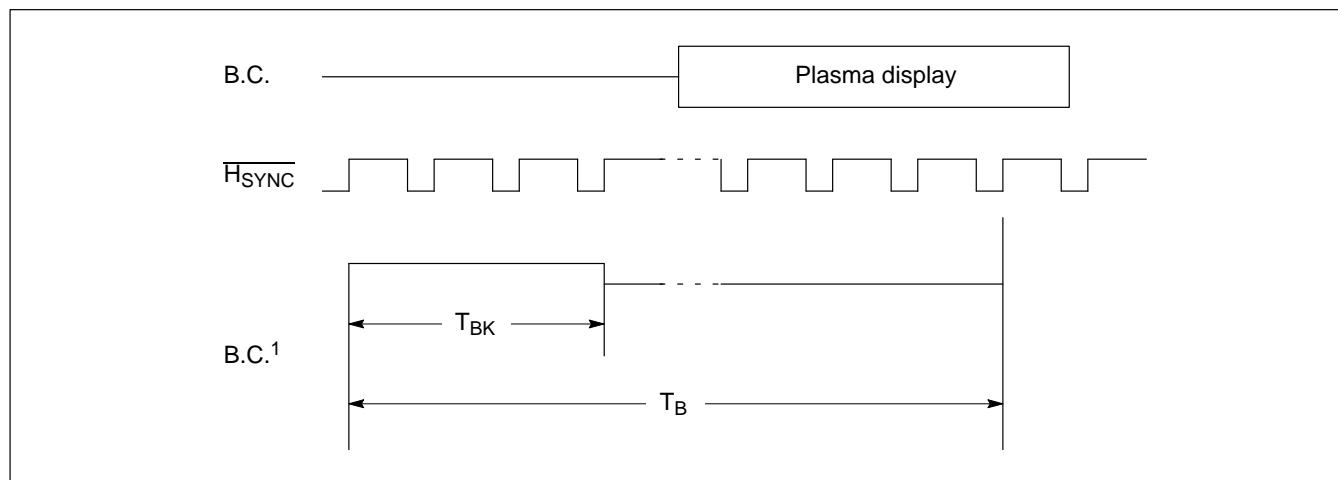

Note: ¹The B.C. signal shall be synchronized with the $\overline{H}_{\text{SYNC}}$ signal.

Interface Circuit

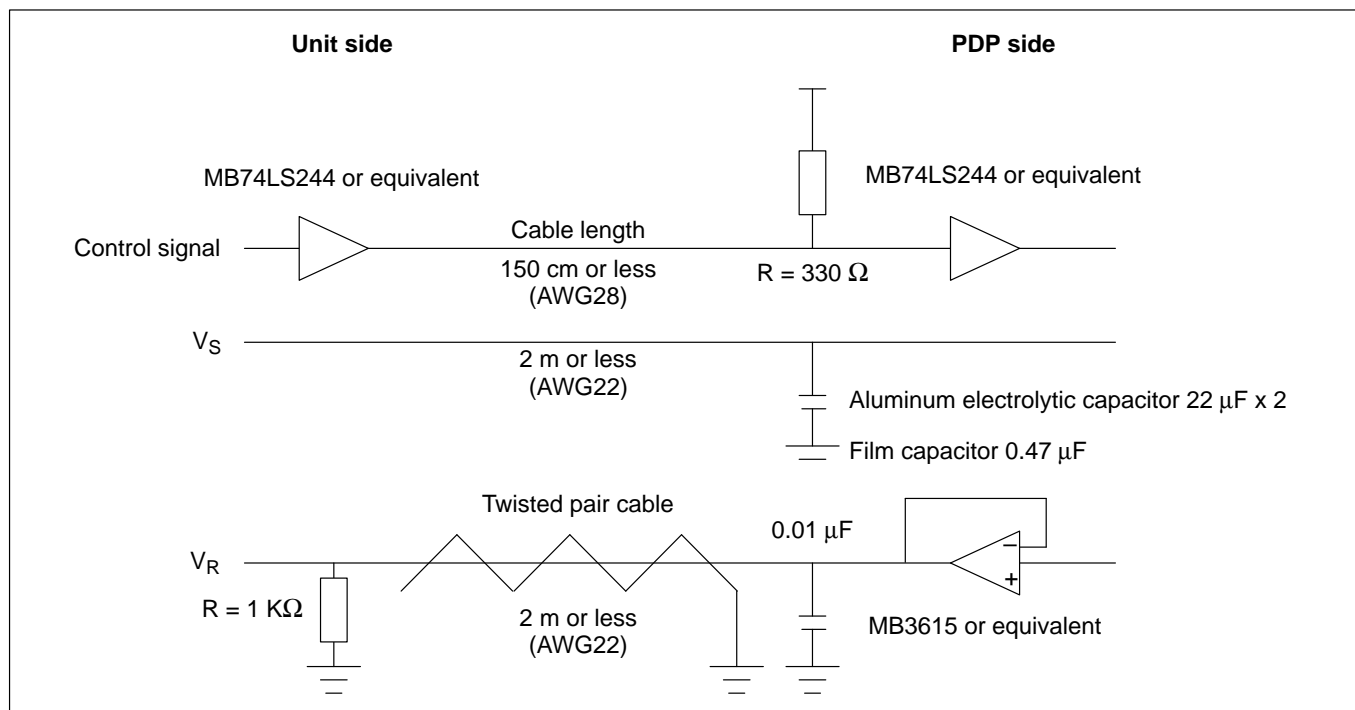


TOUCH PANEL SPECIFICATION

Touch Panel Interface Specifications

Interface method	Conforms to EIA RS-232C
Baud rate	Rate can be automatically set to 300, 1200, 2400, 4800, 9600, and 19200 bps (asynchronous). The specification can be changed by command.
Data configuration	Start bits (St): 1 bit Data (D0 to D7): 8 bits Parity (P): 1 bit, odd, even, or no parity can be selected. The specification can be changed easily.


ST	D ⁰	D ¹	D ²	D ³	D ⁴	D ⁵	D ⁶	D ⁷	P	SP	SP
----	----------------	----------------	----------------	----------------	----------------	----------------	----------------	----------------	---	----	----

Interface Circuit (touch panel)

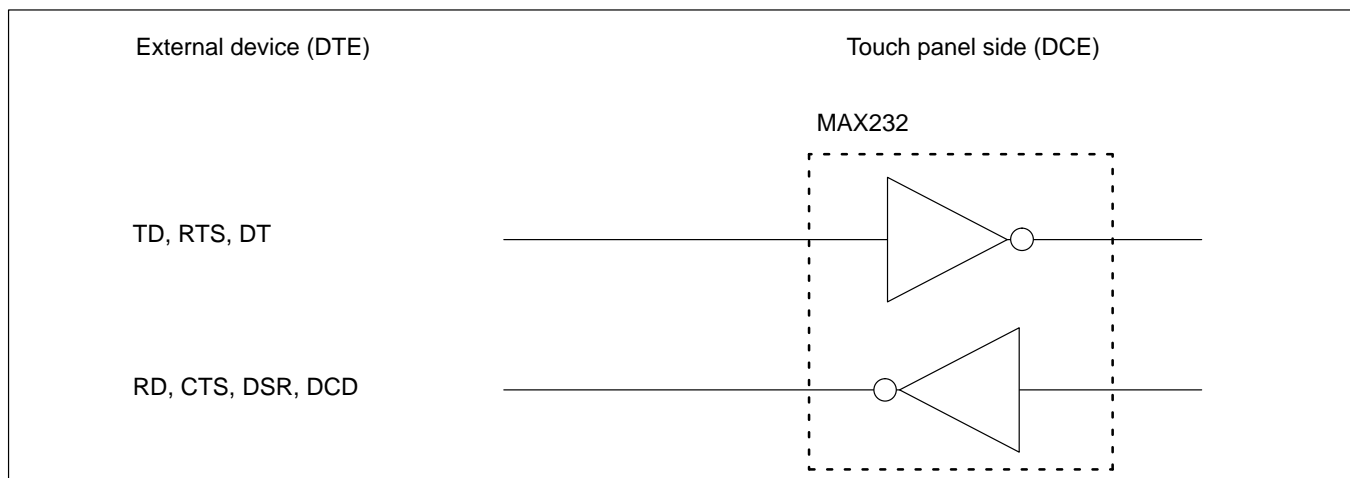


Coordinate Detection at Touch Panel

This unit has an effective area of 231 mm × 171.6 mm and transfers any touch detected within that area as X-Y coordinates. There are 42 pairs of infrared detector and emitting elements along the horizontal line and 26 pairs along the vertical line. The origin of the coordinates shall be the top left corner.

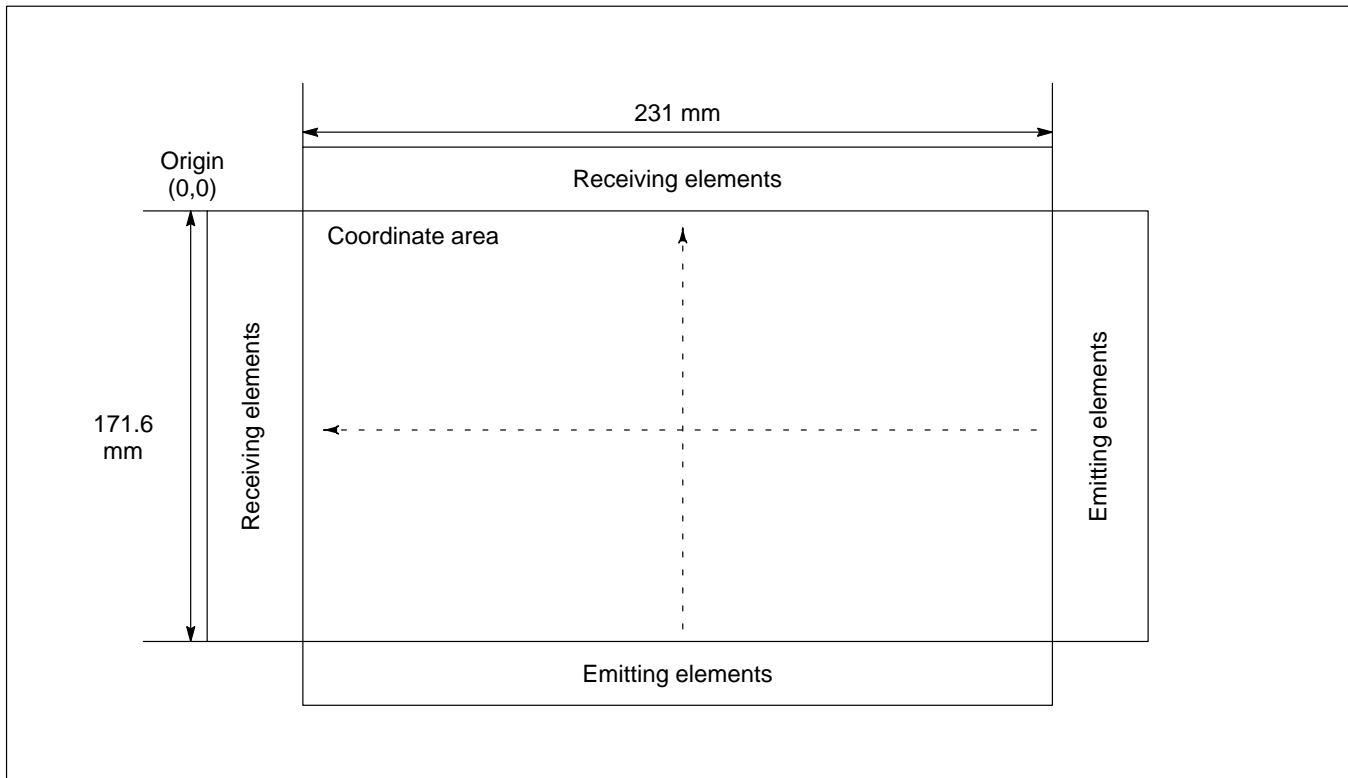

Position of Display and Coordinates

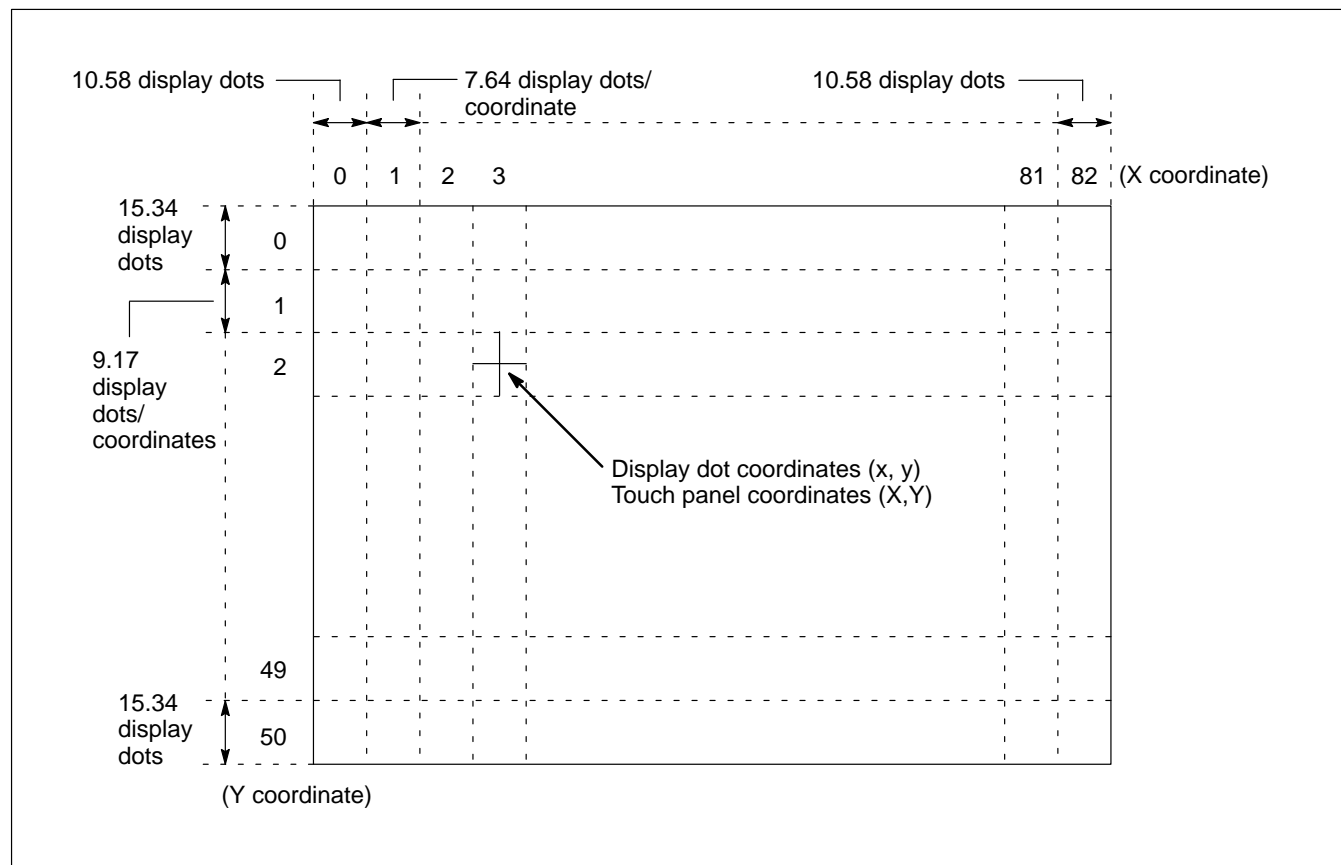

The relationship between display dot coordinates (x, y) and touch panel coordinate is (X, Y) is expressed as shown below:

$$\begin{cases} x = 7.64 \times (X - 0.5) + 10.58 \pm 7 \\ y = 9.17 \times (Y - 0.5) + 15.34 \pm 7 \end{cases}$$

↑
Touch panel installation error

$$\begin{cases} X = (x - 10.58)/7.64 + 0.5 \pm 1 \\ Y = (y - 15.34)/9.17 + 0.5 \pm 1 \end{cases}$$


↑
Touch panel installation error

Digits following the decimal point are rounded down.

Detection Coordinate Transfer Mode

(1) Scan mode


A beam number is assigned to each emitting element. The number of the blocked beam is transferred.

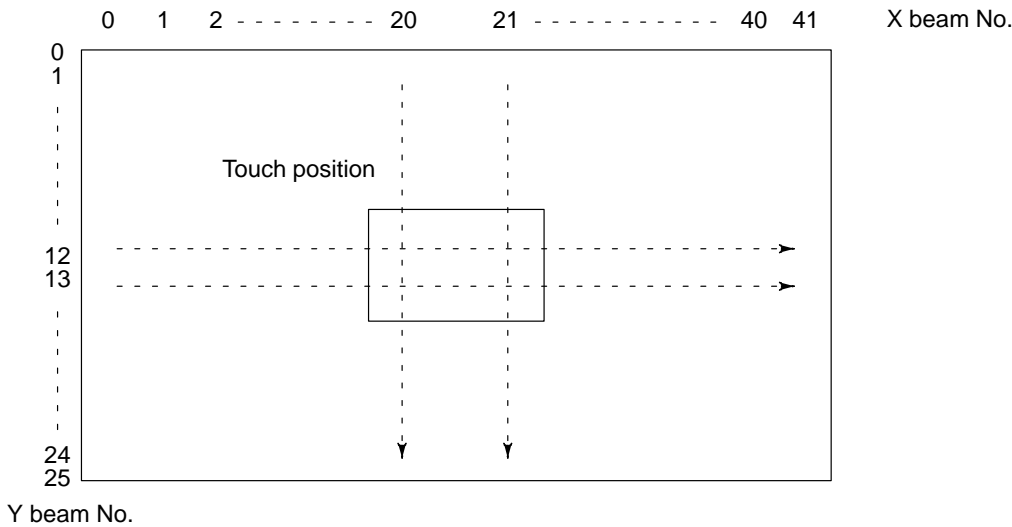

X beams 20 and 21 and Y beams 12 and 13 are transferred.

(2) Coordinate mode

The touch coordinate area is divided into coordinates of X = 0 to 82 and Y = 0 to 50. The coordinates of the touch position are transferred.

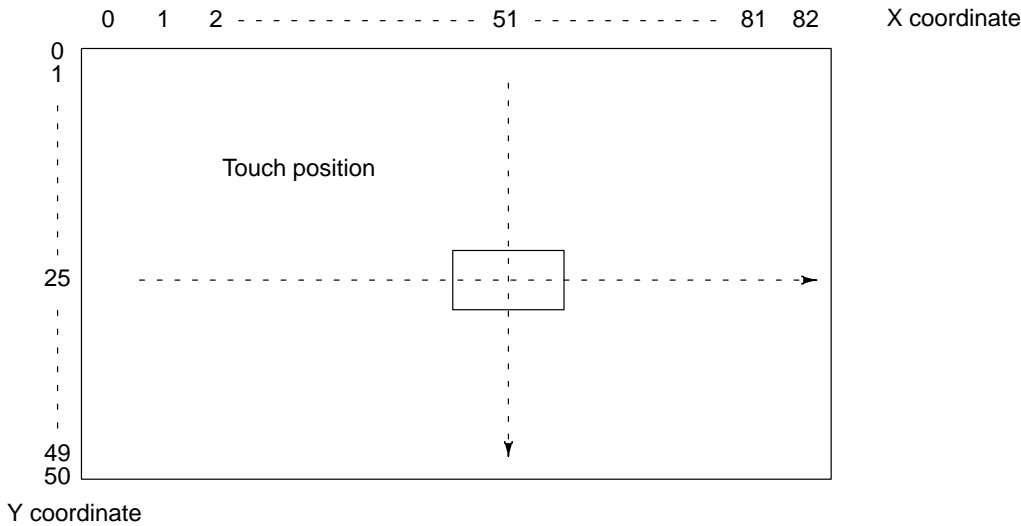

X coordinate 51 and Y coordinate 25 are transferred.

Notes: 1. If a wide area is touched and two or more beams are blocked, the central coordinates are transferred.
2. When two or more beams are blocked and they are not adjacent to each other (multiple touches at separate positions), coordinates are not transferred and a code is transferred to indicate non-adjacent hits.

Detection Operation Mode

Input point operation	Transfers the coordinates of the position touched first, and does not transfer the next coordinates until pressure is released.
Track operation	Transfers touch coordinates as long as the pressure is moving within the coordinate area. Does not transfer coordinates when pressure is released.
Continuous operation	Transfers touch coordinates as long as the pressure is within the coordinate area. Transfers touch coordinates even when pressure is released.
End point operation	Transfers coordinates of the point at which pressure is released.
Additional end point operation	In addition to input point operation, follow-up operation, and continuous operation, transfers the coordinates of the point at which pressure is released.

(1) Control commands

Item	Command	Code ¹	Function
1	Reset	3C	Clears all buffers and resets the touch system.
2	Echo mode ON	20	Sends back all received data to the host.
3	Echo mode OFF	21	Turns off the echo mode.
4	Touch system ON	2A	Starts scanning of the touch system.
5	Touch system OFF	2B	Stops scanning of the touch system.
6	Scanning mode set	22	Sets the detection coordinate mode for scanning mode.
7	Coordinate mode set	23	Sets the detection coordinate mode for coordinate mode.
8	Input point operation	25	Sets the detection coordinate mode for input-point operation.
9	Track operation	26	Sets the detection coordinate mode for track operation.
10	Continuous operation	27	Sets the detection coordinate mode for continuous operation.
11	End point operation	28	Sets the detection coordinate mode for end point operation.
12	Additional end-point operation	29	Adds the end-point operation to each detection operation mode (do not use this command when end-point operation is specified.)
13	Status report	32	Reports the status of the touch system.
14	Configuration report	33	Reports the number of processors in the touch system.
15	Firmware version report	34	Reports the firmware ROM version.
16	Defective beam analysis	36	Reports the status of the optical device.
17	Frame size report	37	Reports the frame size.
18	Self-diagnosis report	3A	Executes the self diagnostic test and reports the status.
19	Clear	3D	Clears the touch report buffer.
20	Hardware flow control ON	41	Enables handshaking with serial interface hardware.
21	Hardware flow control OFF	42	Disables handshaking with serial interface hardware.
22	Data transfer ON	44	Allows data transfer.
23	Data transfer OFF	43	Inhibits data transfer.
24	Baud rate/parity respecification	45	Returns to the setup mode for the data transfer rate and parity.
25	Touch state report	47	Reports the operation setting status of the touch system.
26	Single report	46	Transfers reports to the host system one by one.

Note: ¹The codes are hexadecimal.

(2) Automatic baud rate and parity setup

Baud rates and parity are specified by the transfer of the code (0D) and by the reset command.

(2) Default set values

- i. Touch system: OFF
- ii. Detection coordinate transfer mode: Coordinate mode
- iii. Detection operation mode: Track operation
- iv. Additional end-point operation: OFF
- v. Data transfer: OFF
- vi. Hardware flow control: OFF

CONNECTOR PIN ASSIGNMENT

Signal Connector

FCN-605Q026-G/S

Pin No.	Signal Name	Pin No.	Signal Name
1	$\overline{V_{\text{SYNC}}}$	2	S. GND
3	$\overline{H_{\text{SYNC}}}$	4	S. GND
5	N.C.	6	N.C.
7	N.C.	8	N.C.
9	N.C.	10	N.C.
11	N.C.	12	N.C.
13	N.C.	14	S. GND
15	D0	16	S. GND
17	D1	18	S. GND
19	CLK	20	S. GND
21	N.C.	22	N.C.
23	N.C.	24	N.C.
25	N.C. (V _{CC})	26	N.C. (V _{CC})

Matching connector: FCN-607B026-G/D

Notes: ¹Do not connect anything to the N.C. pins.
²Pins 25 and 26 are V_{CC} output pins for options.

Signal Connector (Touch Panel)

HIF3BD-10PA-2.54DS (Hirose)

Pin No.	Signal Name	Symbol	Signal Direction		
			Touch Panel (DCE)		External Device (DTE)
1	Transmit data	TD	←		
2	Receive data	RD	→		
3	Request to send	RTS	←		
4	Clear to send	CTS	→		
5	Data terminal ready	DTR	←		
6	Data set ready	DSR	→		
7	Data carrier detected	DCD	→		
8	—	—			
9	Signal ground	SG			
10	Frame ground	FG			

Power Supply Connector

FCN-814P-009-TA

Pin No.	Signal Name
1	V_{CC}
2	GND
3	N.C.
4	GND
5	V_S
6	N.C.
7	N.C.
8	GND
9	V_R^*

Notes: Matching connectors:
FCN-813J009-A housing
FCN-813J-T/Q contact for manual use
FCN-813J-T/R contact for automatic use

* This pin is the remote pin for automatically setting V_S when using the power supply (FPF07P-AC100). 0 to 2.5 VDC is output.

Power Supply Connector (Touch Panel) 641126-7 by AMP

Pin No.	Signal name
1	V_{CC}
2	GND
3	—
4	GND
5	N.C.
6	N.C.
7	GND


FTE8050RP-003

Plasma Display Unit with Touch Panel (640 x 400 Dot 10" Screen)

The FTE8050RP-003 is a human-machine interface that provides both screen display and input functions. A new high-brightness plasma display is integrated with a sheet-style resistance-film touch panel.


Even with the integration of the touch panel, the new plasma display is 70% brighter. It provides clear images by employing a 10" display area with 640 x 400 dot resolution. The touch panel has a 20 x 25 key touch switch layout with a built-in touch detection circuit.

Because of its compact size, the FTE8050RP-003 requires less installation space. The enables its use with a greater variety of industrial equipment. Such equipment can be operated more easily by using the FTE8050RP-003 as a guidance display.

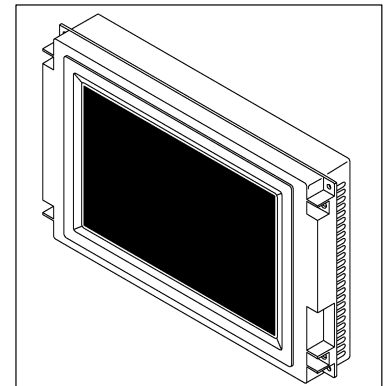

- 70% brighter display
- Display electrode insulation for long display life
- 10" display area
- Integrated display and touch input
- Compact construction
- Standard interface conforming to CRT interface

BLOCK DIAGRAM

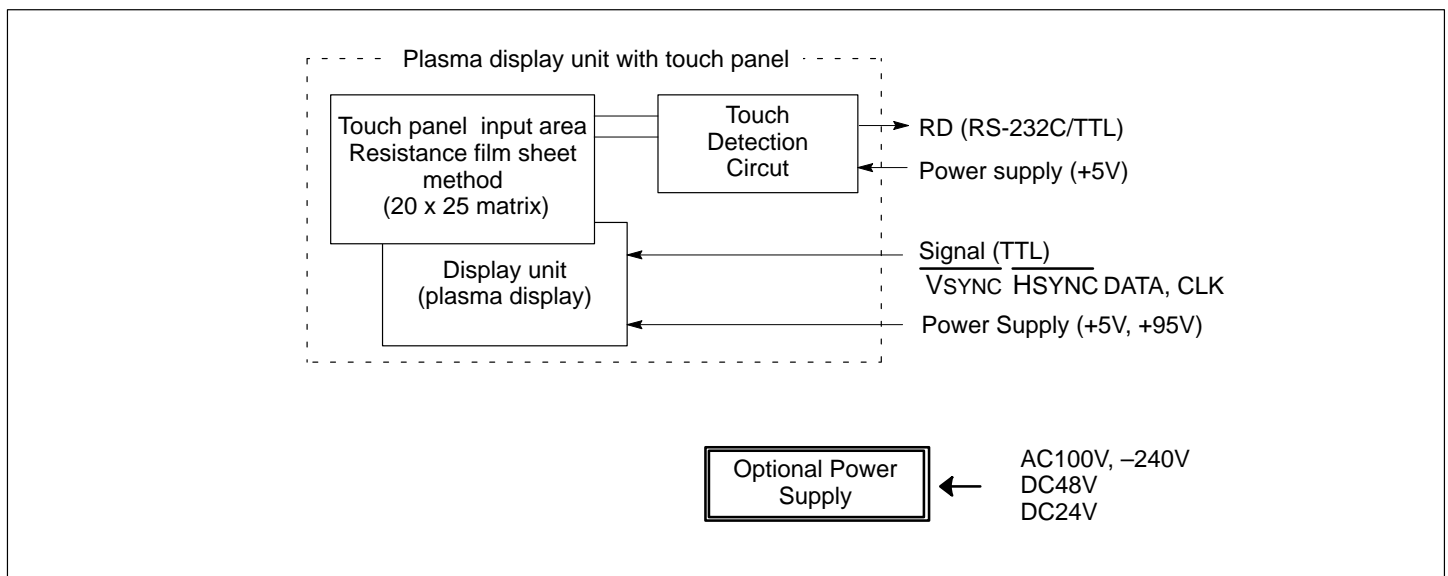

SPECIFICATIONS

Item		Specification
Display Unit	Display Capacity	640 (horizontal) x 400 (vertical) dots
	Dot Pitch	0.33 mm (0.013") Horizontal x 0.33 mm (0.013") Vertical
	Dot Size	0.2 mm (approx.) (0.008 in.)
	Effective Display Dimensions	210.87 mm (8.3") Horizontal × 131.67 mm (5.2") Vertical
	Display Color	Neon orange
	Brightness	Spot: 100 cd/m ² Typical (horizontal synchronous signal cycle 50μs Area Average: 16 cd/m ² Typical
	Contrast	1:20 min
	Viewing Angle	120° min
	Interface	TTL complying with CRT ($\overline{V_{SYNC}}$ $\overline{H_{SYNC}}$ DATA CLK)
	Power Supply	+5V +95V (typ)
	Power Consumption	20W (typ)
	Method	Resistance Film Sheet Method (lower layer: glass; upper layer: polyester)
	Resolution	20 (horizontal) x 25 (vertical) Matrix Type
Touch Input Unit	Visual Area	221 mm (8.7") Horizontal x 142 mm (5.6") Vertical
	Switch Area	210.54 mm (8.29") Horizontal x 131.34 mm (5.17") Vertical
	Touch Force	350 g or less
	Input Method	With finger only (input with a pointed object will cause damage)
	Hardness of the Surface	2H or Less (according to JIS K 5400)
	Surface Filter Treatment	Non-Glare Treated
	Interface	Complying with RS-232C and TTL Level <u>Data Structure</u> Start Bit: 1 Bit Data: 8 Bits Stop Bit: 1 or 2 (can be changed) Parity: None, Odd Number, Even Number (can be changed) Baud Rate: 2400, 4800, 9600, 19200 bps (can be changed)
	Power Supply	+5V
	Current Consumption	500mA max
Temperature Range		0 to 40°C (putting unti upright, display rate of 50% or less)
Maximum External Dimensions		290 (W) × 192 (H) × 43 (D) mm (excluding the cable section)
Weight		Approximately 2.5 kg



CONNECTOR PIN ASSIGNMENT

Signal Connector

(Connector used: FCN-605Q026-G/S)

Pin No.	Signal Name	Pin No.	Signal Name
1	$\overline{V_{SYNC}}$	2	S. GND
3	$\overline{F_{SYNC}}$	4	S. GND
5	N.C. (D0)	6	N.C.
7	N.C. (D1)	8	N.C.
9	N.C. (D2)	10	N.C.
11	N.C. (D3)	12	N.C.
13	N.C.	14	S. GND
15	DATA	16	S. GND
17	N.C.	18	S. GND
19	CLK	20	S. GND
21	B.C.	22	N.C.
23	N.C.	24	N.C.
25	N.C. (V_{CC})	26	N.C. (V_{CC})

Mating connector: FCN-607B026-G/D

Power Supply Connector


(Connector used: FCN-815P009-TA)

Pin No.	Signal Name
1	V_{CC}
2	GND
3	N.C.
4	GND
5	V_s
6	N.C.
7	N.C.
8	GND
9	V_{R^*}

Mating connector housing: FCN-813J009-A
 Connector (manual): FCN-813J-T/Q
 Connector (automatic): FCN813J-T/R

Touch Panel Unit Signal

(Connector: FCN-705Q010-G/S)

Pin No	Signal	Signal Direction	
		Touch Area	Host Side
1	F. GND		
2	N.C.		
3	R.D		
4	N.C.		
5	R.D		
6	S.GRND		
7	S.GRND		
8	S.GRND		
9	S.GRND		
10	S.GRND		

Mating Connector: FCN-607B010-G/D


Power Supply Connector

(Connector: FCN-815P009-TA)

Pin No	Signal
1	VCC
2	GND
3	N.C.
4	GND
5	VS
6	N.C.
7	N.C.
8	N.C.
9	VR

Mating connector housing: FCN-813J009-A
 Connector (manual): FCN813J-T/Q
 Connector (automatic): FCN-813J-T/R

Data Format and Detection Coordinate

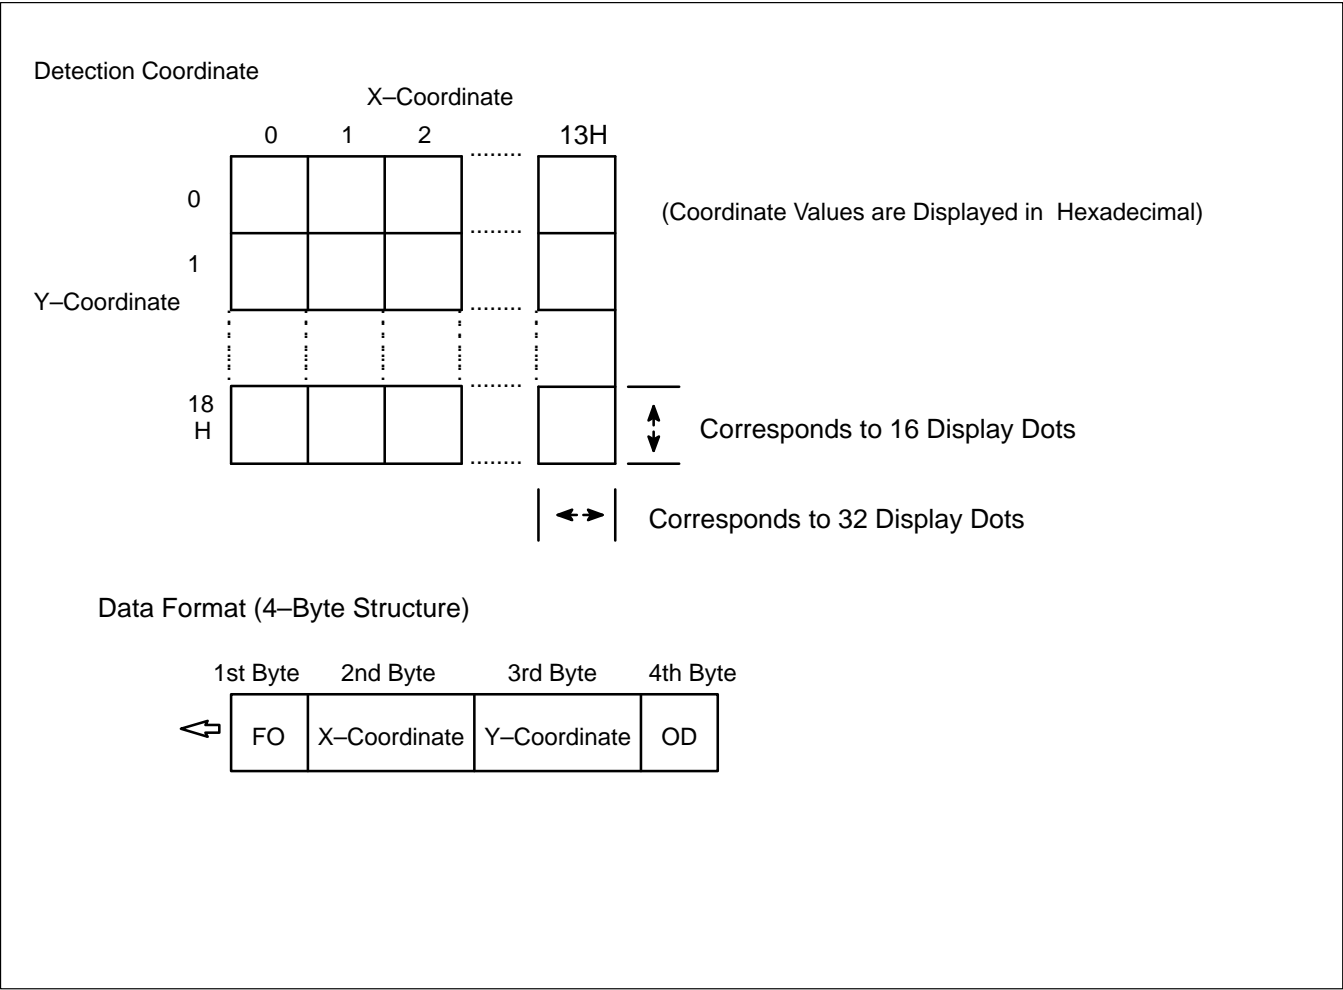

Power Supplies — *At a Glance*


Device	Page
FPF07P-AC100	9-3
FPF07P-AC110/220C	9-4
FPF07P-AC110/220D	9-11
FPF04P-AC100A	9-15

FPF07P-AC100


Power Supply for Plasma Display Unit

The power supply FPF07P-AC100 supplies required specified voltages to plasma display units FPF8050HRUK, FPF8060HRUM, and FPF8060HRUK.

- Strong, durable construction
- Designed to interface with several Fujitsu plasma display units
- Using reference voltage feature, automatically calibrates plasma display units
- Provides five voltage levels
- Meets UL standards

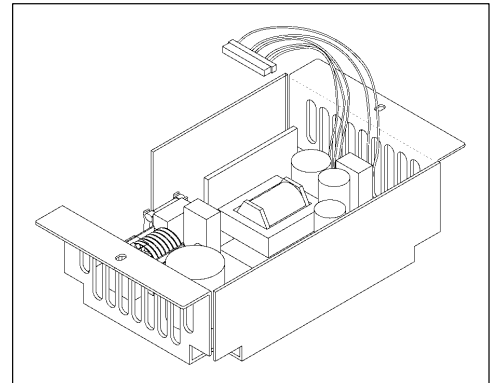

EXTERNAL DIMENSIONS

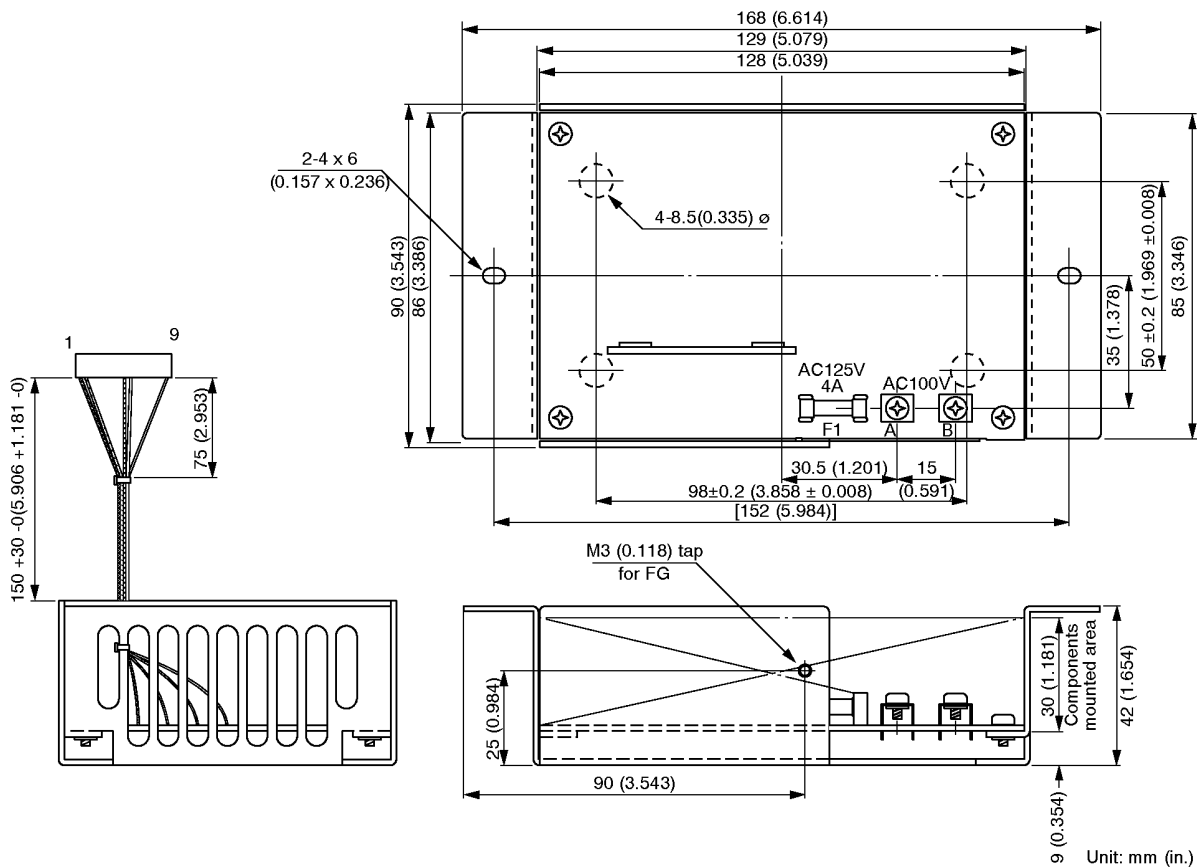

FPF07P-AC110/220C

APPLICATIONS

This power supply unit is applied to the Plasma Display Units as listed below:

FPF8050HRUC, FPF8050HRUK, FPF8050HRUD series, FPF8060HRUM, FPF8060HRUK, FPF8060HRUC series, FPF8060HRUS series, FPF160128SRUA-020, FPF160128SRUA, FTE8050BPE, FTE8050RP series (PDP with touch panel).

Standard	Agency	File Number
NON	NON	
NON	NON	

SPECIFICATIONS

Item	Symbol	Rating	Remark
Input Voltage	V_{IN}	280VAC	(50/60Hz)
Operation Temperature	T_{OP}	0–55°C	
Storage Temperature	T_{STG}	–20–70°C	
Operation Humidity	H_{OP}	20–80%	no condensation
Storage Humidity	H_{STG}	20–85%	no condensation

PRODUCT SPECIFICATION EDITION RECORD

Edit	Date	Design	Check		Appr	Description	Prod Rev

POWER INPUT

Item	Symbol	Condition	Value
Input Voltage	V_{IN}		90–264VAC
Input Apparent Power	P		190 VA max
Input Frequency	f		50–60Hz ($\pm 5\%$)
Efficiency			65% min
Leak Current		264VAC	1.0 mA max
Inrush Current			30A (O-P) max

POWER OUTPUT

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Output voltage 1 (Fixed)	V_{CC}	$V_{IN} = 85$ to 264 VAC 15 to 100% load	—	5.1	—	V
V_{CC} output ripple/noise		at resistive load	—	—	100	mV
Output voltage 2 (Variable)	V_S	$V_{IN} = 85$ to 264 VAC 15 to 100% load	88	94	100.5	V
V_S output ripple/noise		at resistive load	—	—	500	mV
Output current 1	I_{CC}	$V_{IN} = 90$ to 264 VAC 15 to 100% load (average)	0.05	—	1.2	A
Output current 2	I_S	$V_{IN} = 90$ to 264 VAC 15 to 100% load (peak)	—	—	3	A
	I_S	$V_{IN} = 90$ to 264 VAC 15 to 100% load (average)	0	—	550	mA

Note: Output voltage V_S is adjusted automatically by using reference voltage V_R from PDP unit. Relationship between V_S and V_R is: $V_S = 88 + 5 \times V_R (\pm 0.5V)$

OVER SUPPLY PROTECTION

Item	Rated Voltage	Variable Rating	Protection Point Against Over Supply
Output Voltage 1 (V_{CC})	5.1	Fixed	6.0 to 7.0 V
Output Voltage 2 (V_S)	$88.0 + 5 \times V_R$ ($V_R =$ to 2.5V)	88.0 to 100.5V	108 to 128 V

MECHANICAL SPECIFICATIONS

Performance Specifications

Item	Value
Vibration	
Frequency:	10 to 55 to 10 Hz/5 min.
Acceleration:	2 G max.
Time:	
Operating:	5 min. in X, Y, and Z direction
Non-Operating:	2 hr. in X, Y, and Z direction
Shock (non-operating)	
Acceleration:	40 G max.
Time:	11 ms, 5 times in X, Y, and Z direction
Pressure	
Operating:	700 to 1114 mb
Non-Operating:	340 to 1114 mb

MECHANICAL SPECIFICATIONS

General Characteristics

Item	Specification
Short Protection	No breakdown by short between GND and output terminals for 2 hr.
Dielectric Strength	2000V (primary/secondary FG) 1000V (secondary FG) 1 min
Insulation Resistance	500 VDC/50M Ω min
Rising Time of Vcc	60 ms max

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Ratings	Remarks
Input Voltage	V_{IN}	135 VAC	50/60 Hz
Input Current	I_{IN}		
Power Consumption	P_O		Output

DC Input Characteristics

Item	Symbol	Condition	Value
Input Voltage	V_{IN}		90 to 132 VAC
Input Current	I_{IN}	90 VAC	1.3 A max.
Frequency	f		50 to 60 Hz ($\pm 5\%$)
Effective Ratio	—		70% min.
Leak Current	—	132 VAC	0.7 mA max.
	—	+15% -20%	within 0.5 sec
Inrush Current	—		30 A max.

DC Output Characteristics

This power supply unit outputs V_{CC} and V_S . V_{CC} is the fixed voltage. V_S varies with the reference voltage V_R (0 to 2.5 VDC) and is input through the 9th contact of the connector.

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Output Voltage 1 (Fixed)	V_{CC}	V_{IN} 90 to 132 VAC 15 to 100% load		5.0		V
V_{CC} Input/Output Ripple/Noise					50	mV
Output Voltage 2 (Variable)	V_S	V_{IN} 90 to 132 VAC 15 to 100% load	88	94	100.5	V
V_S Input/Output Ripple/Noise					500	mV
Output Current 1 (average)	I_{CC}	V_{IN} 90 to 132 VAC 15 to 100% load	0.8	1.35	1.5	A
Output Current 2 (inrush) (average)	I_S	V_{IN} 90 to 132 VAC 15 to 100% load			2	A
	I_S	V_{IN} 90 to 132 VAC 15 to 100% load	50		310	mA

Note: Output voltage V_S is adjusted automatically by using reference voltage V_R . The relationship between V_S and V_R is given by the following equation.

$$V_S = 88 + V_R \times 5 \text{ (V)}$$

MECHANICAL SPECIFICATIONS**Performance Specifications**

Item	Value
Vibration	
Frequency:	10 to 55 to 10 Hz/5 min.
Acceleration:	2 G max.
Time:	
Operating:	5 min. in X, Y, and Z direction
Non-Operating	2 hr. in X, Y, and Z direction
Shock (non-operating)	
Acceleration:	40 G max.
Time:	11 ms, 5 times in X, Y, and Z direction
Pressure	
Operating:	700 to 1114 mb
Non-Operating:	340 to 1114 mb

CONNECTOR PIN ASSIGNMENT

Power Input (Terminal)

(Three terminals with M3 Screw)

Terminal No.	Name
1	AC Power
2	AC Power
3	Frame Ground

Power Output (Connector with Cable)

Pin. No.	Name
1	+5 V
2	GND (L)
3	N.C.
4	GND (H)
5	+88 V
6	N.C.
7	N.C.
8	N.C.
9	V _R

Notes: Housing: FCN813J009-A
Contact: FCN813J-T/S
Cable: length – 150 mm (+30,–0)
wire – AWG22


FPF07P-AC110/220D

Power Supply for Plasma Display Unit


The power supply FPF07P-AC110/220D supplies required specified voltages to the following plasma display series:

FPF8050HRUC, FPF8050HRUK, FPF8050HRUD, FPF8060HRUM,
FPF8060HRUK, FPF8060HRUC, FPF8060HRUS, FTE8050BPE, FTE8050RP.

- Strong, durable construction
- Provides ? voltage levels
-
-

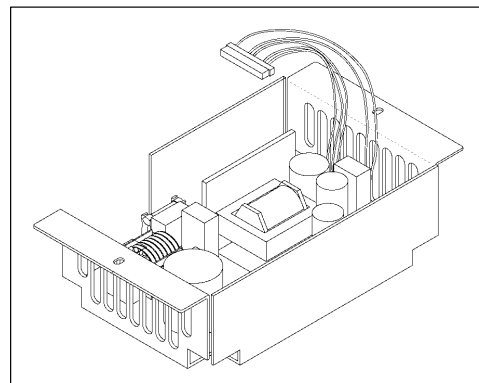

EXTERNAL DIMENSIONS

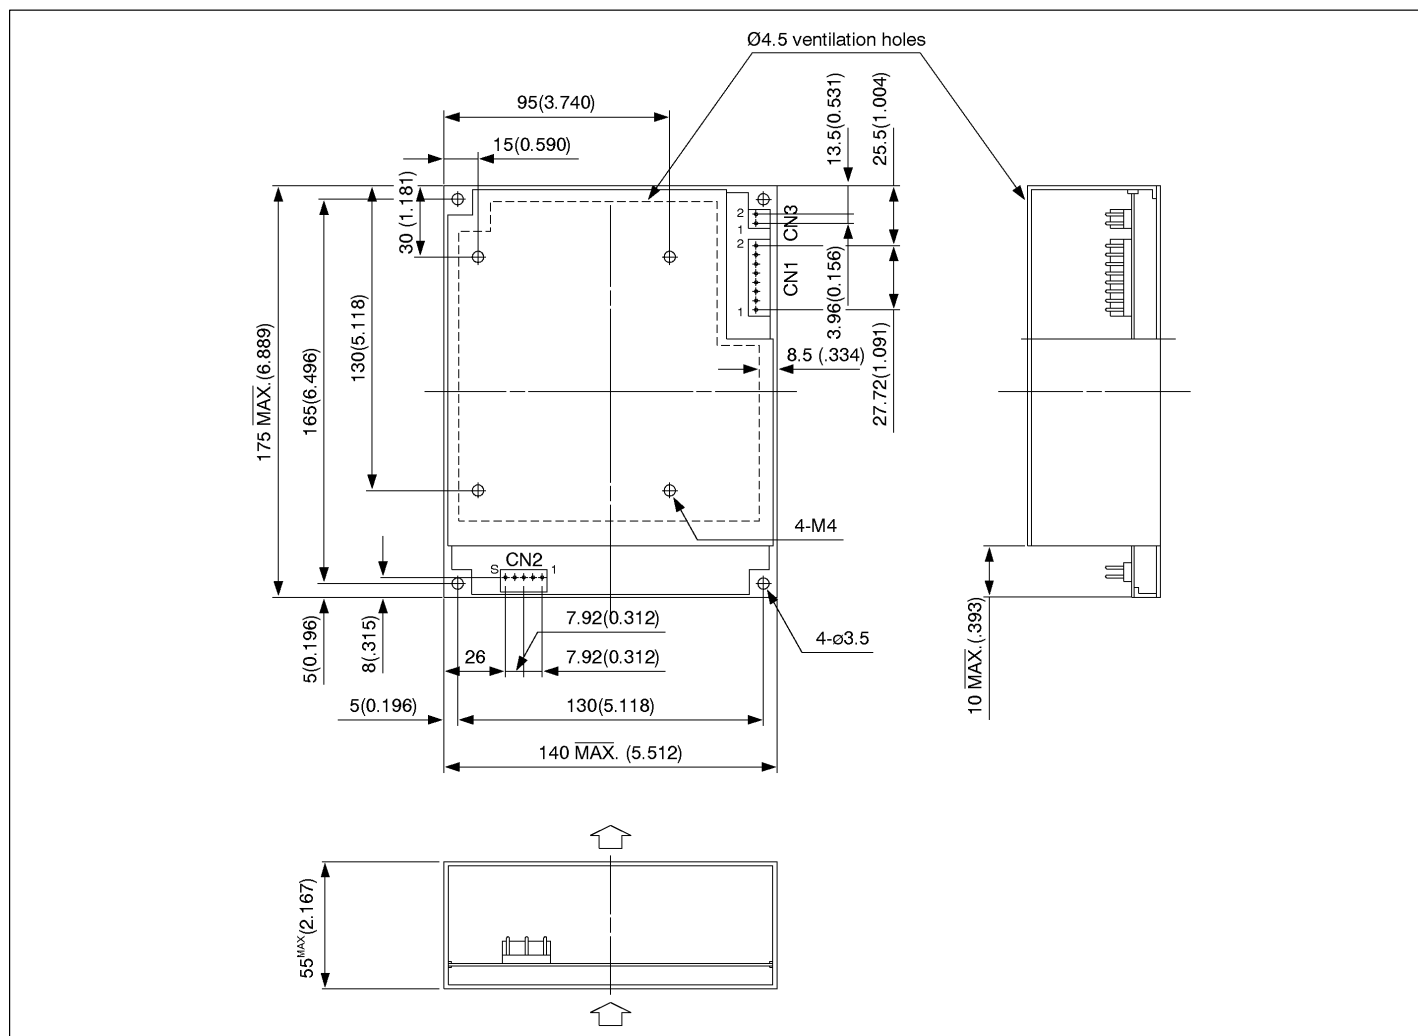

ELECTRICAL SPECIFICATIONS

Absolute Maximum Ratings

Item	Symbol	Max. Ratings	Remarks
Input Voltage			
Input Current			
Power Consumption			

DC Input Characteristics

Item	Symbol	Condition	Value
Input voltage	V_{IN}		85 to 264 VAC
Input apparent power	P		180 VA max.
Input frequency	f		50 to 60 Hz ($\pm 5\%$)
Effeciency	—		65% min.
Leak Current	—	264 VAC	1.0 mA max.
Inrush Current	—		30 A _(O-P) max.

DC Output Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Output voltage 1 (Fixed)	V_{CC}	$V_{IN} = 85 \text{ to } 264 \text{ VAC}$ 15 to 100% load	—	5.1	—	V
V_{CC} output ripple/noise		at resistive load	—	—	100	mV
Output voltage 2 (Variable)	V_S	$V_{IN} = 85 \text{ to } 264 \text{ VAC}$ 15 to 100% load	88	94	100.5	V
V_S output ripple/noise		at resistive load	—	—	500	mV
Output current 1	I_{CC}	$V_{IN} = 85 \text{ to } 264 \text{ VAC}$ 15 to 100% load (average)	0.15	—	3.2	A
Output current 2 (inrush)	I_S	$V_{IN} = 85 \text{ to } 264 \text{ VAC}$ 15 to 100% load (peak)	—	—	2	A
	I_S	$V_{IN} = 85 \text{ to } 264 \text{ VAC}$ 15 to 100% load (average)	0	—	400	mA

Note: Output voltage V_S is adjusted automatically by using reference voltage V_R from PDP unit. Relationship between V_S and V_R is,

$$V_S = 88 + 5 \times V_R (\pm 0.5V)$$

MECHANICAL SPECIFICATIONS

Physical Specifications

Item	Value
External Dimensions	See external dimensions figure
Weight	Approx. 840g

Performance Specifications

Item	Value
Vibration	
Frequency:	10 to 55 to 10 Hz/5 min.
Acceleration:	2 G max.
Time:	
Operation:	5 minutes in X, Y, and Z direction
Non-Operation:	2 hours in X, Y, and Z direction
Shock (non-operation)	
Acceleration:	40 G max.
Time:	11 ms max. (5 times in each direction of X, Y, and Z)
Pressure	
Operation:	700 to 1114 mb
Non-Operation:	340 to 1114 mb
Operating Temperature	0 to 55°C
Storage Temperature	–20 to 70°C
Operating Humidity	20 to 80% RH (no condensation)
Storage Humidity	20 to 85% RH (no condensation)

CONNECTOR PIN ASSIGNMENT

CN-1 (Output)

B8P-VH

Pin No.	Power
1	V _{CC}
2	GND
3	GND
4	N.C.
5	+V _S
6	N.C.
7	GND
8	VR

Note: All connectors are made by Japan Solderless Terminals, Co. (J.S.T.)

CN-2 (Input)

B3P5-VH

Pin. No.	Power
1	V _O
2	N.C.
3	V _O
4	N.C.
5	.G.

CN-3 (Output)


B2P-VH

Pin. No.	Power
1	V _{CC}
2	GND


FPF04P-AC100A
Power Supply for Plasma Display Unit

The power supply FPF04P-AC100A supplies required specified voltages to plasma display unit FPF8050HFUGA by providing 100/115 VAC.

- Strong, durable construction
- Designed specifically to interface with plasma display unit FPF8050HFUGA
- Provides two voltage levels
- Meets UL standards

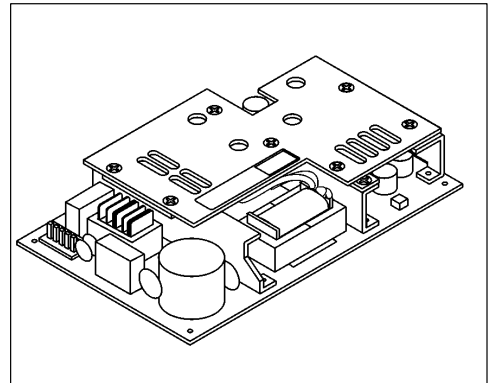

EXTERNAL DIMENSIONS

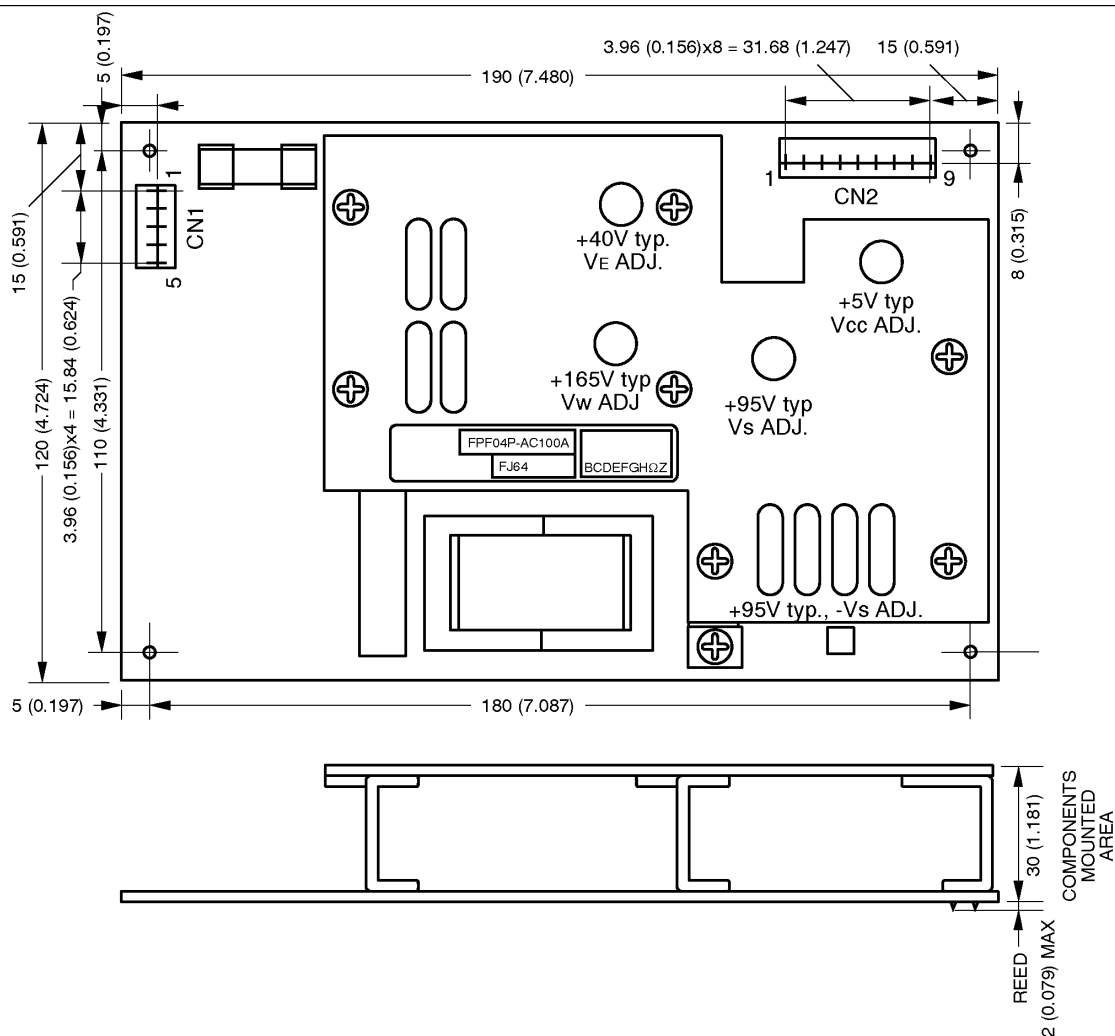

ELECTRICAL SPECIFICATIONS**Absolute Maximum Ratings**

Item	Symbol	Max. Ratings	Remarks
Input Voltage	V_I	135 VAC	
Input Current	I_I	1.5 A	
Power Consumption	P_O	45 W	(Output)
Inrush Current		45 A	


DC Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input Voltage	V_I	50/60 Hz, 15 to 100% Load	90	100	130	VAC
Output Voltage 1	V_{CC}	$V_O = 90$ to 130	4.5	5.0	5.5	VDC
Output Voltage 2	$+V_S$	$V_O = 90$ to 130	80	95	110	VDC
Output Voltage 3	$-V_S$	$V_O = 90$ to 130	-110	-95	-80	VDC
Output Voltage 4	V_W	$V_O = 90$ to 130	160	165	175	VDC
Output Voltage 5	V_E	$V_O = 90$ to 130	38	40	42	VDC
Output Current 1	I_{CC}	$V_O = 90$ to 130 (Average)	0.8		1.4	A
Output Current 2	$+I_S$	$V_O = 90$ to 130 (Average)	20		160	mA
Output Current 3	$-I_S$	$V_O = 90$ to 130 (Average)	20		160	mA
Output Current 4	I_W	$V_O = 90$ to 130 (Average)			20 (300)	mA
Output Current 5	I_E	$V_O = 90$ to 130			150	mA
Ripple (including noise)		$V_O = 90$ to 130			1	%
Stability of Output Voltage	(V_{CC})				± 5.0	%
Stability of Output Voltage	(V_S)				± 2.0	%
Stability of Output Voltage	$(-V_S)$				± 2.0	%
Stability of Output Voltage	(V_W)				± 5.0	%
Stability of Output Voltage	(V_E)				± 5.0	%

Note: Output voltages (from 1 to 4) can be varied by variable resistors.

Output Voltage Adjustment

The voltage levels of V_S , $-V_S$, and V_W in the FPF04P-AC100A power supply must be adjusted to match the corresponding voltage levels of the FPF8050HFUGA plasma display unit. The V_S , $-V_S$, and V_W levels specific to each plasma display unit are shown on a label attached to the upper right corner of the plasma display frame. Change the V_S , $-V_S$, and V_W levels of the power supply by turning the volume control on the variable resistors. The location of the variable resistors on the power supply is shown below.

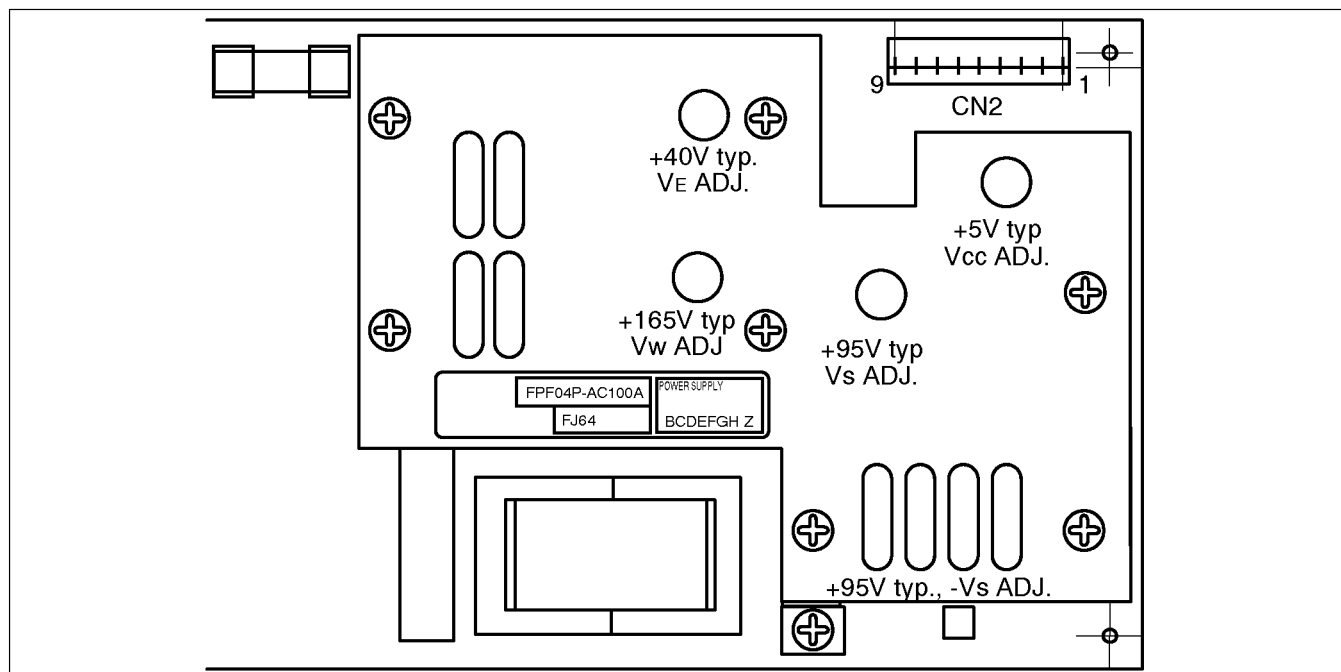

MECHANICAL SPECIFICATIONS

Physical Specifications

Item	Value
External Dimensions	190 x 120 x 30 mm (7.480 x 4.724 x 1.181 in.) See External Dimensions figure
Weight	Approximately 460 g

Performance Specifications

Item	Value
Vibration Frequency:	10 to 55 to 10 Hz/5 min.
Acceleration:	2 G max.
Time: Operation:	5 min. in X, Y, and Z direction
Non-operation	2 hrs in X, Y, and Z direction
Shock Acceleration:	40 G max.
Time:	11 ms max. in X, Y, and Z direction
Operating Temperature	–5 to 60°C
Storage Temperature	–20 to 70°C
Operating Relative Humidity	20 to 80% RH (no condensation)
Storage Relative Humidity	20 to 85% (no condensation)

CONNECTOR PIN ASSIGNMENT

CN-1

B9P-VH (made by J.S.T.)

Pin. No.	Signal Name
1	V_{CC}
2	GND (L)
3	$-V_S$
4	GND (H)
5	$+V_S$
6	V_W
7	N.C.
8	V_E
9	N.C.

Notes: Attached Connectors:
 VHR-9N, Housing (made by J.S.T.)
 SVH-21T-1.1, Contact (made by J.S.T.)

J.S.T. is Japan Solderless Terminal

CN-2

B3P-VH (made by J.S.T.)

Pin. No.	Signal Name
1	V_O
2	N.C.
3	V_O
4	N.C.
5	F.G.

Notes: Attached Connectors:
 VHR-5N, Housing (made by J.S.T.)
 SVH-21T-1.1, Contact (made by J.S.T.)

Crimping Tool:
 YC-16 (made by J.S.T.)

Sales Information — *At a Glance*

Page	Title
10-3	Introduction to Fujitsu
10-3	Fujitsu Limited (Japan)
10-3	Fujitsu Microelectronics, Inc. (USA)
10-4	Fujitsu Electronic Devices Europe
10-4	Fujitsu Microelectronics Asia PTE Ltd. (Singapore)
10-5	Electronic Components Corporation Headquarters Worldwide
10-6	FMI/ECO Sales Offices for North and South American
10-7	FMG and FML Sales Offices for Europe
10-7	FMAP Sales Offices for Asiatic, Australia, & Oceania
10-8	FMI /ECO Sales Representatives
10-11	FMI/ECD Distributors

Introduction to Fujitsu

Fujitsu Limited (Japan)

Fujitsu Limited was founded as a telecommunications equipment manufacturer in 1935, and today is not only one of Japan's leading telecommunications companies, but also one of the world's largest computer manufacturers.

The leadership has resulted, at least in part, from the superb quality of the company's semiconductors and electronics components. Manufactured by the company's Electronics Devices Operations Group, these vital electronic devices also contribute to the high reliability and performance of products made by many other manufacturers around the world.

Today, Fujitsu is one of the world's top manufacturers of semiconductors and electronic components. In Japan, Fujitsu's R&D laboratories for semiconductor and electronic components are situated in Kawasaki and Mie; the manufacturing works are located in Iwate, Aizu, Wakamatsu and Suzaka. Fujitsu also has six affiliated manufacturing works in the country. Overseas facilities in the US, Europe, and Asia also help to meet the growing global demand for Fujitsu semiconductors and electronic components.

Fujitsu enforces strict quality control at all stages of production, from materials selection, through manufacturing to final testing. As a result, Fujitsu's electronic devices are known for their extremely high reliability and excellent cost-to-performance ratio.

Fujitsu manufactures a full line of semiconductors and electronic components to meet the diverse applications of a wide variety of customers. Backed by Fujitsu's extensive R&D commitment equal to over 10% of annual sales, Fujitsu's electronic devices stay on the cutting edge of electronics technology.

Fujitsu Microelectronics, Inc. (USA)

Fujitsu Microelectronics, Inc. (FMI), with headquarters in San Jose, California was established in 1979, as a wholly-owned Fujitsu Limited subsidiary for the marketing, sales, and distribution of Fujitsu integrated circuit and component products. Since 1979, FMI has grown to four marketing divisions and two manufacturing divisions. FMI offers a complete array of components including semiconductor products for its customers throughout North and South America.

The Semiconductor Division provides a complete range of products and services for the worldwide market, including ASICs, ASSPs, memory devices, SPARC processors, graphics ICs and highly-integrated LAN devices. Fujitsu is a world leader in the designing and manufacturing of ASIC products, many of which are designed at the San Jose headquarters.

The Advanced Products Division (APD) is responsible for designing and selling a full line of SPARC® processors, peripheral chips, and the EtherStar™ LAN controller that it designed. The EtherStar™ LAN controller is the first VLSI device to integrate both StarLAN and Ethernet protocols into one device. The core of APD's Etherstar chip was the result of a cooperative venture with Ungermann-Bass.

The Microwave and Optoelectronics Division (MOD) markets Ga As FETs and FET power amplifiers, lightwave microwave devices, optical devices, emitters, and Si transistors.

The largest marketing division is the Integrated Circuits Division (ICD) which offers a diverse range of advanced semiconductor products designed and manufactured by Fujitsu. Standard products include memories, analog/linear products, hybrid circuits, and microcomputer and communications products. ICD's custom and semi-custom products include application specific integrated circuits (ASICs).

The Electronic Components Division (ECD) evolved from a distribution organization for relays and connectors into the present board-based group that includes computer subsystems and standalone or plug-in components. ECD markets connectors, keyboards, thermal printers, plasma displays, and relays.

Fujitsu Electronics Devices Europe:

Fujitsu Mikroelektronik GmbH (FMG), West Germany
Fujitsu Microelectronics Limited (FML), UK
Fujitsu Microelectronics Italia SRL (FMIL), Italy
Fujitsu Microelectronics Ireland, Ltd (FME), Ireland

Fujitsu Mikroelektronik GmbH (FMG) was established in June 1980 in Frankfurt, Germany, as Fujitsu's European headquarters and is a totally owned subsidiary of Fujitsu Limited, Tokyo. Fujitsu Microelectronics Limited (FML) is a sister company based in Maidenhead, England and dedicated to serving the UK, Ireland, and Scandinavia. Fujitsu Microelectronics Italia (FMIL) is based in Milan, Italy and serves Italy, Spain, Portugal, and the rest of Southern Europe. Together, FMG, FML, and FMIL supply the European market with a full range of integrated circuits and electronic components. Sales offices are located in Munich, Frankfurt, Stuttgart, Paris, Eindhoven, Milan, Maidenhead, and Stockholm.

Fujitsu Microelectronics Ireland, Ltd. (FME) was established in 1980, in Dublin, Ireland as Fujitsu's European assembly center for integrated circuits. FME produces DRAMs, EPROMs, and other LSI memory products. The range of electronic components offered by FMG and FML includes connectors, keyboards, hybrid ICs piezoelectric devices, plasma devices, plasma displays, relays, and thermal printers.

Fujitsu Microelectronics Asia, PTE Ltd. (FMAP) , Singapore

Fujitsu Microelectronics Asia PTE Ltd, (FMAP) opened in August 1986, in Hong Kong, as a wholly-owned Fujitsu subsidiary for sales of electronic devices to the Asian, Australian, and Southwest Pacific markets. In 1990, FMAP moved to a new location in Singapore.

FMAP offers Fujitsu's wide range of electronic components such as connectors, keyboards, plasma displays, relays thermal printers, and integrated circuits.

**Electronic Components Corporate Headquarters — Worldwide
International Corporation****FUJITSU LIMITED**

Marunouchi Headquarters
6-1, Marunouchi 1-chome
Chiyoda-ku, Tokyo 100
JAPAN
Phone: (03) 3216-3211
Telex: 781-222833
FAX: (03)3213-7174

For additional marketing information contact the following:

Headquarters for Japan**FUJITSU LIMITED**

Electronic Devices Marketing
Furukawa Sogo Bldg
6-1 Marunouchi 2-chome
Chiyoda-ku, Tokyo 100
JAPAN
Phone: (03) 3216-3211
Telex: 781-2224361

Headquarters for North and South America**FUJITSU MICROELECTRONICS, INC.**

Electronic Components Division
3545 North First Street
San Jose, CA 95134-1804
USA
Phone: (408) 922-9000
Telex: 910-671-4915
FAX: (408) 428-0640

Headquarters for Europe**FUJITSU MIKROELEKTRONIK GmbH**

Am Siebenstein 6-10
6072 Dreieich-Buchschlag
GERMANY
Phone: (06) 103 6900
Telex: 411963
FAX: (06) 103 690122

Headquarters for Asia, Australia and Oceania**FUJITSU MICROELECTRONICS ASIA PTE LIMITED**

06-04/-07 Plaza By The Park
No. 51 Bras Basah Road
Singapore 0718
Phone: (65) 366-1600
Telex: RS 55573 FESPL
FAX: (65) 336-1609

FMI/ECD Sales Offices for North and South America**PACIFIC**

FMI/ECD
10600 N. De Anza Blvd
Suite 250
Cupertino, CA 95014
Phone: (408) 446-9575
FAX: (408) 725-8746

CENTRAL

FMI/ECD
One Pierce Place
Suite 1130
Itasca, IL 60143-2681
Phone: (708) 250-8580
FAX: (708) 250-8591

SOUTHERN

FMI/ECD
3500 Parkway Lane
Suite 290
Norcross, GA 30092
Phone: (404) 242-5862
FAX: (404) 441-2016

WESTERN

FMI/ECD
Century Centre
2603 Main Street
Suite 510
Irvine, CA
92714-6232

EASTERN

FMI/ECD
1000 Winter Street
Suite 2500
Waltham, MA 02154
Phone: (617) 487-0029
FAX: (617) 890-9002

LATIN & SOUTH AMERICA

FMI/ECD
Century Centre
2603 Main Street
Suite 510
Irvine, CA 92714-6232

SALES ADMINISTRATION

FMI/ECD
3545 N. First Street
San Jose, CA 95134
Phone: (408) 922-9000
FAX: (408) 428-0640



FMG and FML Sales Offices for Europe**FMG, France**

FUJITSU MIKROELEKTRONIK GMBH
Immeuble Trident
3-5, voie Felix Eboue
94024 Creteil Cedex, France
Phone: (1) 42078200
FAX: (1) 42077933

FMG, Germany (Central)

FUJITSU MIKROELEKTRONIK GmbH
Am Siebenstein 6-10
6072 Dreieich-Buchsschlag
F.R. Germany
Phone: (06103) 690-0
FAX: (06103) 690-122

FML, United Kingdom

FUJITSU MIKROELEKTRONIK CS LTD
Hargrove House
Belmont Road, Maidenhead
Berkshire SL6 6NE
United Kingdom
Phone: (0628) 76100
FAX: (0628) 7811484

FMAP Sales Offices for Asia, Australia, and Oceania**Taiwan**

FUJITSU MIKROELEKTRONIK PACIFIC ASIA LTD
TW Branch
1906 No. 333 Kaelung Road
Sec. 1 Taipei 10548
Taiwan, Republic of China
Phone: (02) 757-6548
FAX: (02) 757-6571

Singapore

FUJITSU MIKROELEKTRONIK ASIA LTD
06-0407 Plaza by the Park
51 Bras Basah Road
Singapore 0718
Phone: (65) 336-1600
FAX: 336-1609

Hong Kong

FUJITSU MIKROELEKTRONIK ASIA LTD
616-617, Tower B
New Mandarin Plaza
14 Science Museum Road
Tst East, Kowloon
Hong Kong
Phone: 7230393
FAX: 7216555

FMI/ECD Sales Representatives

For Product Information, contact your nearest Fujitsu representative.

ARIZONA

HOWE & HOWE SALES
4109 N. 18th Street
Phoenix, AZ 85016
(602) 264-7971

ALABAMA

CSR ELECTRONICS
303 Williams Street
Suite 931
Huntsville, AL 35801
(205) 533-2444

CALIFORNIA

NORCOMP
3350 Scott Blvd
Suite 24
Santa Clara, CA
(408) 727-7707

NORCOMP
2140 Professional Drive
Suite 200
Roseville, CA 95661
(916) 782-8070

BALZER-WOLF ASSOC
17951-G Sky Park Circle
Irvine, CA 92714
(714) 261-6877

INFINITY SALES INC.
4500 Campus
Suite 300
Newport Beach, CA 92660
(714) 833-0300

COLORADO

TALISMAN ASSOC
7464 Arapahoe Rd #A9
Boulder, CO 80303
(303) 444-7300

CONNECTICUT

CONNECTICUT APPLIED TECH
555 Highland Avenue
Suite 2
Cheshire, CT 06410
(203) 272-6564

FLORIDA

SEMTRONIC ASSOC
657 Maitland Avenue
Altamonte Springs, FL 32701
(407) 831-8233

SEMTRONIC ASSOC
3471 NW 55th Street
Ft Lauderdale, FL 33309
(305) 731-2484

SEMTRONIC ASSOC
1467 S. Missouri
Clearwater, FL 34616
(818) 461-4675
(517) 932-3311

GEORGIA

CSR Electronics
1651 Mt. Vernon Road
Suite 200
Atlanta, GA 30038
(404) 396-3720

ILLINOIS

BRANSKY SALES
1726 First Street
Highland Park, IL 60035
(708) 433-2375

IOWA

ELECTROMECH SALES
4403 First Avenue SE
Suite 302
Cedar Rapids, IA 52402
(319) 393-1637

INDIANA

Gen II Marketing
3003 E 96th Street
Suite 102
Indianapolis, IN 46240
(317) 848-3083

Gen II Marketing
4803 Oak Mist Trail
Ft. Wayne, IN 46804
(219) 436-4485

KANSAS

AEM Inc
8843 Long Street
Lenexa, KS 66215
(913) 888-0022

KENTUCKY

Gen II Marketing
8819 Roman Court
Louisville, KY 40291
(502) 491-5250

MARYLAND

ARBOTEK ASSOC
102 W. Joppa Road
Towson, MD 21204
(301) 825-0775

MASSACHUSETTS

MILL-BERN ASSOC
2 Mack Road
Woburn, MA 01801

MICHIGAN

R.C. Merchant & Co
815 Main Street
St Joseph, MI 49085
(616) 983-7378

MINNESOTA

ELECTROMECH SALES
1601 E. Highway 13
Suite 200
Burnsville, MN 55337
(612) 894-8200

MISSOURI

AEM Inc
11520 St Charles Rock
Suite 131
St. Louis, MO 63044
(314) 298-9900

FMI/ECD Sales Representatives (continued)

For Product Information, contact your nearest Fujitsu representative

NEW JERSEY

TECHNICAL APPL & MARKETING
91 Clinton Road
Suite 10
Fairfield, NJ 07006
(201) 575-4130

NEW MEXICO

FP SALES
7301-F Jefferson Avenue NE
Albuquerque, NM 87109
(505) 345-5553

NEW YORK

HC JOHNSON AGENCY
2488 Browncroft Blvd
P.O. Box 25368
Rochester, NY 14625
(716) 586-0777

NORTH CAROLINA

CSR ELECTRONICS INC
5848 Farington Place
Suite 2
Raleigh, NC 27609
(919) 878-9200

CSR ELECTRONICS INC
6425 Creft Circle
Indian Trail, NC 28079
(704) 882-3995

OHIO

McFADDEN SALES INC
2939 Donnylane Blvd
Columbus, OH 43235
(614) 761-3177

OREGON

L SQUARED LTD
15234 NW Greenbrier Parkway
Beaverton, OR 97006
(503) 629-8555

PENNSYLVANIA

JACOBSEN ASSOC
Meetinghouse Prof Bldg
499 Easton Rd
Horsham, PA 19044
(215) 674-2937

TENNESSEE

CSR ELECTRONICS INC
Grand Union
406 Union Avenue
Suite 550
Knoxville, TN 37902
(615) 637-0293

TEXAS

TECHNICAL MARKETING INC.
3320 Wiley Post Road
Carrollton, TX 75006
(214) 387-3601

TECHNICAL MARKETING INC
2901 Wilcrest Drive
Suite 139
Houston, TX 77042
(713) 783-4497

TECHNICAL MARKETING INC.
3445 Executive Center Drive
Suite 103
Austin, TX 78731
(512) 343-6976

UTAH

HENDRICKSON SALES
3575 Honeycut Road
Salt Lake City, UT 84106
(801) 467-1445

WASHINGTON

L SQUARED LTD
105 Central Way
Kirkland, WA 98033
(206) 827-8555

WISCONSIN

BRANSKY SALES
10780 Crestview Drive
Cedarburg, WI 53012
(414) 377-6837

FMI/ECD Sales Representatives (continued)

For Product Information, contact your nearest Fujitsu representative

CANADA

CMT RENMARK, INC.
7560 Airport Road, Unit 15
Mississauga, Ontario
CANADA L4T4H4
(416) 612-0900

CMT RENMARK, INC.
268 Lakeshore Road
Pointe Claire, Quebec
CANADA H9S4K9
(514) 694-6088

CMT RENMARK, INC.
135 Michael Cowpland Drive
Suite 201
Kanata, Ontario
CANADA K2M 2E9
(613) 591-9555

DMI
107-3738 North Fraser Way
Burnaby, BC V5J5G1
(604) 430-3680

MEXICO

SOLANO ELECTRONICA
Cienfuegos 651-A
Col Lindvista
MEXICO, DF07300
011-525-754-6480

SOLANO ELECTRONICA
ERMITA 1039-10
Col Chapailta
Guadalajara, JAL
MEXICO 45040
011-523-647-4250

PUERTO RICO

SEMTRONIC ASSOCIATES
Mercantil Plaza Building
Suite 816
Hato Rey, PUERTO RICO 00981
(809) 766-0700

FMI/ECD Distributors

For Product Information, contact your nearest Fujitsu representative

ALABAMA

MARSHALL INDUSTRIES
3313 Memorial Parkway South
Huntsville, AL 35801
(205) 881-9235

ARIZONA

CYPRESS ELECTRONICS
455 South 48th Street
Suite 105
Tempe, AZ 85281
(602) 966-2256

MARSHALL INDUSTRIES
9831 51st Street
Suite C107-109
Phoenix, AZ 85044
(602) 966-2256

CALIFORNIA

BELL MICROPRODUCTS
550 Sycamore Drive
Milpitas, CA 95035
(408) 434-1150

BELL MICROPRODUCTS
18350 Mt Langley
Suite 207
Fountain Valley, CA 92708
(714) 963-0667

COMPASS COMPONENTS
1461 Attenberry Lane
San Jose, CA 95131
(408) 432-7575

CYPRESS ELECTRONICS
2175 Martin Avenue
Santa Clara, CA 95050
(408) 980-8400

CYPRESS ELECTRONICS
28720 Roadside Drive
Suite 249
Agoura Hills, CA 91301
(818) 597-9491

CYPRESS ELECTRONICS
151 Kalmus Drive
Suite B150
Costa Mesa, CA 90620
(714) 549-2424

CYPRESS ELECTRONICS
10054 Mesa Ridge Court
San Diego, CA 92121
(619) 535-0011

ERIC ELECTRONICS
2210 Lundy Avenue
San Jose, CA 95131
(408) 432-1111

CALIFORNIA

KENSINGTON ELECTRONICS
12 Hughes Street
Suite D-100
Irvine, CA 92718
(714) 588-0575

MARSHALL INDUSTRIES
26637 Agoura Rd
Calabasa, Ca 91302
(818) 878-7000

MARSHALL INDUSTRIES
5961 Kearny Villa Rd
San Diego, CA 92123
(619) 627-4184

MARSHALL INDUSTRIES
366 Los Coches Street
Milpitas, CA 95035
(408) 942-4600

MARSHALL INDUSTRIES
One Morgan
Irvine, CA 92718
(714) 458-5394

MARSHALL INDUSTRIES
3039 Kilgore Avenue
Suite 140
Rancho Cordova, CA 95670
(916) 635-9700

MARSHALL INDUSTRIES
9320 Telstar Avenue
El Monte, CA 91731
(818) 307-6000

MILGRAY ELECTRONICS
912 C Pancho Road
Camarillo, CA 93012
(805) 484-4055

MILGRAY ELECTRONICS
16 Technology Drive
Suite 206
Irvine, CA 92718
(714) 753-1282

WESTERN MICROTECH
12900 Saratoga Avenue
Saratoga, CA 95070
(408) 725-1660

WESTERN MICROTECH
6837 Nancy Ridge Drive
San Diego, CA 92121
(619) 453-8430

WESTERN MICRO TECH
1637 North Brian Street
Orange, CA 92667
(714) 637-0200

CALIFORNIA (continued)

WESTERN MICROTECH
28720 Roadside Drive
Suite 175
Agoura Hills, CA 91301
(818) 707-0377

COLORADO

CYPRESS ELECTRONICS
12503 E. Euclid Drive
Suite 230
Englewood, CO 80111
(303) 792-5829

MARSHALL INDUSTRIES
12351 North Grant
Thornton, CO 80241
(303) 451-8444

CONNECTICUT

MARSHALL INDUSTRIES
20 Sterling Drive
Wallington, CT 06492
(203) 265-3822

MILGRAY ELECTRONICS
326 West Main Street
Millford, CT 06492
(203) 878-5538

FLORIDA

MARSHALL INDUSTRIES
2700 West Cypress Creek Road
Fort Lauderdale, FL 33309
(305) 977-4880

MARSHALL INDUSTRIES
380 South North Lake Blvd
Suite 1024
Altamonte Springs, FL 32701
(407) 767-8585

MARSHALL INDUSTRIES
2840 Scherer Drive
Suite 410
St Peterburg, FL 33702
(813) 573-1399

MILGRAY ELECTRONICS
755 Rinehart Road
Suite 100
Lake Mary, FL 32746
(407) 321-2555

GEORGIA

MARSHALL INDUSTRIES
5300 Oakbrook Parkway
Norcross, GA 30093
(404) 923-5750

FMI/ECD Distributors (continued)**GEORGIA** (continued)

MILGRAY ELECTRONICS
3000 Northwoods Parkway
Suite 115
Norcross, GA 30071
(404) 446-9777

ILLINOIS

HAWK ELECTRONICS
661 Glenn Avenue
Wheeling, IL 60090
(708) 459-4030

LECTRHO COMPONENTS
154 Easy Street
Carol Stream, IL 60188
(708) 690-0520

MARSHALL INDUSTRIES
50 East Commerce Drive
Suite 1
Schaumburg, IL 60173
(708) 490-0755

MILGRAY ELECTRONICS
1530 E. Dundee Rd
Suite 310
Palatine, IL 60067
(708) 202-1900

INDIANA

CUSTOM SERVICE ELECTRONICS
4113 Vincennes Road
Indianapolis, IN 46268
(317) 879-9119

MARSHALL INDUSTRIES
6990 Corporate Drive
Indianapolis, IN 46278
(317) 297-0483

KANSAS

MARSHALL INDUSTRIES
10413 West 84th Terrace
Lenexa, KS 66214
(913) 492-3121

MILGRAY ELECTRONICS
6400 Glenwood
Suite 313
Overland Park, KS 66202
(913) 236-8800

MASSACHUSETTS

GLYNN ELECTRONICS
91 Clay Street
Middleboro, MA 02346
(508) 947-4264

MASSACHUSETTS (continued)

INTERFACE ELECTRONICS
228 South Street
Hopkinton, MA 01748
(508) 435-0100

MARSHALL INDUSTRIES
33 Upton Drive
Wilmington, MA 01887
(503) 658-0810

MILGRAY ELECTRONICS
187 Ballardvale Street
Wilmington, MA 01887
(617) 657-5900

WESTERN MICROTECH
20 Blanchard Road
Burlington, MA 01810
(617) 273-2800

MARYLAND

MARSHALL INDUSTRIES
2221 Broadbitch Drive
Suite G
Silver Springs, MD 20904
(301) 622-1118

MILGRAY ELECTRONICS
9801 Broken Land Parkway
Columbia, MD 21045
(401) 995-6169

VANTAGE COMPONENTS
6925 R Oakland Mills Road
Columbia, MD 21045
(301) 720-5100

MICHIGAN

MARSHALL INDUSTRIES
31607 Schoolcraft Road
Livonia, MI 48150
(313) 525-5850

MINNESOTA

BERQUIST COMPANY
5300 Edina Ind Blvd
Minneapolis, MN 55436
(612) 835-2322

CYPRESS ELECTRONICS
7650 Executive Drive
Eden Prairie MN 55344
(612) 934-2104

MARSH ELECTRONICS
7313 Washington Avenue
Minneapolis, MN 55439
(612) 941-1130

MISSOURI

MARSHALL INDUSTRIES
3377 Hollenberg Drive
Bridgeton, MO 63044
(314) 291-4650

NORTH CAROLINA

MARSHALL INDUSTRIES
5224 Greensdairy Road
Raleigh, NC 27604
(919) 878-9882

NEW JERSEY

MARSHALL INDUSTRIES
101 Fairfield Road
Fairfield, NJ 07006
(201) 882-0320

MILGRAY ELECTRONICS
3002 Greentree Exec Campus
Marlton, NJ 08053
(609) 983-5010

VANTAGE COMPONENTS
23 Sebago Street
Clifton, NJ 07013
(201) 777-4100

NEW YORK

MARSHALL INDUSTRIES
100 Marshall Drive
Endicott, NY 13760
(607) 785-2345

MARSHALL INDUSTRIES
1250 Scottsville Road
Rochester, NY 14624
(716) 235-7620

MILGRAY ELECTRONICS
1170 Pittsford Victor Road
Pittsford, NY 14534
(716) 235-0830

MILGRAY ELECTRONICS
77 Schmitt Blvd
Farmingdale, NY 11735
(516) 420-9800

VANTAGE COMPONENTS
1056 G West Jericho Turnpike
Smithtown, NY 11787
(516) 543-2000

OHIO

MARSHALL INDUSTRIES
30700 Bainbridge Road
Unit A
Solon, OH 44139
(216) 248-1788

FMI/ECD Distributors (continued)**OHIO** (continued)

MARSHALL INDUSTRIES
3520 Park Central Drive
Dayton, OH 45414
(513) 898-4480

MILGRAY ELECTRONICS
6155 Rockside Road
Cleveland, OH 44131
(216) 447-1520

REPCO ELECTRONICS
6561 Cochran Road
Solon, OH 44139
(216) 248-8900

OREGON

MARSHALL INDUSTRIES
9705 SW Gemini Drive
Beaverton, OR 97005
(503) 644-5050

WESTERN MICROTECH
1800 NW 169th Place
Suite B-300
Beaverton, OR 97006
(503) 629-2082

PENNSYLVANIA

MARSHALL INDUSTRIES
401 Parkway View Drive
Pittsburg, PA 15205
(412) 788-0441

TEXAS

CYPRESS ELECTRONICS
3010 North Skyway Circle
Irving, TX 75038
(214) 255-0065

MARSHALL INDUSTRIES
10681 Haddington Drive
Suite 160
Houston, TX 77040
(713) 467-1666

MARSHALL INDUSTRIES
8504 Cross Park Drive
Austin, TX 78754
(512) 837-1991

MARSHALL INDUSTRIES
1551 N. Glenville Drive
Richardson, TX 75006
(214) 705-0600

MILGRAY ELECTRONICS
16610 North Dallas Pkwy
Suite 1300
Dallas, TX 75248
(214) 248-1603

UTAH

MARSHALL INDUSTRIES
2355 South 1070 West
Suite D
Salt Lake City, UT 84119

MILGRAY ELECTRONICS
310 East 4500 South
Salt Lake City, UT 84107
(801) 261-2999

WASHINGTON

CYPRESS ELECTRONICS
22122 20th Avenue SE
Suite 159A
Bothell, WA 98021
(206) 483-1144

MARSHALL INDUSTRIES
11715 North Creek Parkway South
Suite 112
Bothell, WA 98011
(206) 486-5747

WESTERN MICROTECH
550 Kirkland Way
Suite 100
Kirkland, WA 98033-6240
(206) 828-2741

WISCONSIN

HAWK ELECTRONICS
2717 Grandview Blvd
Suite 104
Waukesha, WI 53188
(414) 547-4457

MARSH ELECTRONICS
1563 South 101st Street
Milwaukee, WI 53214
(414) 475-6000

MARSHALL INDUSTRIES
20900 Swenson Drive
Suite 150
Waukesha, WI 53186
(414) 797-0400

CANADA

FUTURE ELECTRONICS
4606 97th Street
Edmonton, AL
CANADA T6E5N9
(403) 438-2858

FUTURE ELECTRONICS
237 Hymus Blvd
Point Claire, Quebec
CANADA H9R5C7
(514) 694-7710

CANADA (continued)

MARSHALL INDUSTRIES
148 Brunswick Blvd
Pointe Claire, Quebec
CANADA H9R5P9
(514) 694-8142

MARSHALL INDUSTRIES
4 Paget Road
Units 10&11, Bldg 1112
Bramton, Ontario
CANADA L6T5G3
(416) 458-8046

MILGRAY ELECTRONICS
2783 Thomas Gate Drive
Mississauga, Ontario
CANADA L4T1G5
(416) 678-0958

Plasma Display Video Controller Compatibility Table

PDP Part No.	Flat Panel Based					VME Bus		CRT Based			
	Yamaha Display Master	Yamaha EGA Display Master	Yamaha SVGA Display Master	Allus Tech ATC-1141-XX	Atlantic Digital FPD Controller	Ziatech SVGA Card	Radisys FPD Controller	WD Paradise Plus/EM-16	WD Paradise VGA 1024	Ahead Systems VGA Card	OEM Only CRT Controller
Character & Low Info Content											
FPC4012NRUL-01											X
FPF4015NRUF											X
EGA Compatible (640x400)											
FPF8050HFUGA	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUC-001	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUD-001	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUD-101	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUE-121	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUM	X (PROM)	X (PROM)			X (-05A)						
FPF8050HRUK	X (PROM)	X (PROM)			X (-05A)						
VGA Compatible (640x480)											
FPF8060HRUC-120	X (PROM)		X (PROM)		X (-05B)	X	X	X (MODIFY)			
FPF8060HRUM	X (PROM)		X (PROM)		X (-05B)	X	X				
FPF8060HRUK	X (PROM)		X (PROM)		X (-05B)	X	X	X (MODIFY)	X (PROM)	X (PROM)	
FPF8060HRUS-120	X (PROM)		X (PROM)		X (-053)	X	X		X (PROM)	X (PROM)	
Touch Screen Modules											
FTE8050RP-003	X (PROM)	X (PROM)			X (-05A)						
FTE8050BP/BPE	X (PROM)	X (PROM)			X (-05A)						
FTE8060BPC	X (PROM)	X (PROM)			X (-03)						
Large Size Units with Monitors											
FPF12896HRUF-B					X (-7B)						(SBUS)
FPF160128SRUA-001					X (-7B)						(SBUS)
FPF160128SRUA-020					X (-7B)						(SBUS)
FPF20000S-501					X (-7B)						(SBUS)
FPF20000S-601					X (-7B)						(SBUS)

Definition of Terms (all supplied by Fujitsu):

(MODIFY): A custom signal cable and ROM BIOS

(PROM): A set of PROMs

(SBUS): A SBUS controller – P/N FPF07A–SBUS

Video Controller Manufacturer List

Yamaha Corporation of America
Systems Technology Division
981 Ridder Park Drive
San Jose, CA 95131
1 (800) 543-7457
(408) 437-3133
(408) 437-8791 (FAX)
Contacts: Kevin Michelizzi, Sr. Engineer
Gene Jiane, Engineer

Allus Technology Corporation
12611 Jones Road
Houston, TX 77070
(713) 984-4455
(713) 894-6709 (FAX)
Contacts: Ray Hill, VP Engineering
Kenny Garrison, Eng. Manager

Atlantic Digital Corporation
851 West State Road 436
Suite 1051
Altamonte Springs, FL 32714
(407) 788-4200
(407) 788-8692 (FAX)
Contacts: Charlie Jordan, Eng. Manager

Ziatech Corporation
3433 Roberto Court
San Luis Obispo, CA 93401
(805) 541-0488
(805) 541-5088 (FAX)
Contact: Mark Evans, Sys. Prod. Manager

Radisys Corporation
19545 NW Von Muemann
Beaverton, OR 97006
1 (800) 950-0044
(503) 690-1229
(503) 690-1228
Contact: Merat Bagha, Engineer
Patty Baid, Account Manager

Western Digital (Paradise) Imaging*
800 West Middlefield Road
Mountain View, CA 94043
(415) 960-3360
(714) 932-5000
Contact: Retail Sales Department
*For Paradise Card Applications, contact FMI/ECD
Marketing directly

Adhead Systems, Incorporated
44244 Fremond Blvd.
Fremont, CA 94538
(510) 623-0900
(510) 623-0960 (FAX)
Contact: Robert Wang, HW Engineer
Steve Lee, President

Paradise Card Distributors:

Tobar (Los Angeles)
(714) 951-0133
Contact: Jim Banks

Ingram/MicroD (Orange County)
1 (800) 456-8000 x41
Contact: Retail Sales Department

Section 1: Introduction – At A Glance **1–1**

Introduction	1–3
AC–Memory Technology	1–3
Types of Panels	1–4
High Information Content Displays	1–5
Reduction of Drive Circuits	1–5
Pursuit of Low Voltage	1–6
Grey–Scale Display	1–7
VGA Compatibility: Ease of Design	1–7
Future Developments	1–7

Section 2: Character Type – At A Glance **2–1**

FPC4012NRUL-01 Plasma Display Unit	2–3
---	-----

Section 3: Graphic Unit (small size) – At A Glance **3–1**

FPF4015NRUF Plasma Display Unit	3–3
--	-----

Section 4: Graphic Unit (640 x 400 dots) – At A Glance **4–1**

FPF8050HFUGA Plasma Display Unit	4–3
FPF8050HRUD–001 Plasma Display Graphics Unit	4–25
FPF8050HRUD–101 Plasma Display Graphics Unit	4–35
FPF8050HRUE–121 Plasma Display Unit	4–45
FPF8050HRUK Plasma Display Graphics Unit	4–57
FPF8050HRUM Plasma Display Graphics Unit	4–67

Section 5: Graphic Unit (640 x 480 dots) – At A Glance	5–1
---	------------

FPF8060HRUB–002	
Plasma Display Graphics Unit	5–3
FPF8060HRUC–120	
Plasma Display Graphics Unit	5–13
FPF8060HRUK	
Plasma Display Graphics Unit	5–23
FPF8060HRUM	
Plasma Display Graphics Unit	5–33
FPF8060HRUS–120	
AC Memory Plasma Display Unit	5–43

Section 6: Graphic Unit (Large Sizes) – At A Glance	6–1
--	------------

FPF12896HRUF–B	
Plasma Display Graphics Unit	6–3
FPF160128SRUA-001	
Plasma Display Graphics Unit	6–13
FPF160128SRUA–020	
Plasma Display Graphics Unit	6–23

Section 7: Graphic Type Standalone Units – At A Glance	7–1
---	------------

FPF12000SA	
Plasma Display Graphics Unit	7–3
FPF20000S–501	
Plasma Display Monitor	7–11
FPF20000S–601	
Plasma Display Monitor	7–21

Section 8: Graphic Units with Touch Panels – At A Glance	8–1
---	------------

FTE8050BP	
Plasma Display Unit with Touch Panel	8–3
FTE8050BPE	
Plasma Display Unit with Touch Panel	8–21
FTE8060BPC	
Plasma Display Unit with Touch Panel	8–25
FTE8050RP–003	
Plasma Display Unit with Touch Panel (640 x 400 Dot 10" Screen)	8–43

Section 9: Power Supplies – At A Glance	9–1
--	------------

FPF07P-AC100	
Power Supply for Plasma Display Unit	9–3
FPF07P-AC110/220D	
Power Supply for Plasma Display Unit	9–11
FPF04P-AC100A	
Power Supply for Plasma Display Unit	9–13

Section 10: Sales Information – At A Glance	10–1
--	-------------

Introduction to Fujitsu	10–3
Fujitsu Limited (Japan)	10–3
Fujitsu Microelectronics, Inc. (USA)	10–3
Fujitsu Electronics Devices Europe:	10–4
Fujitsu Microelectronics Asia, PTE Ltd. (FMAP) , Singapore	10–4
Electronic Components Corporate Headquarters — Worldwide	10–5
FMI/ECD Sales Offices for North and South America	10–6
FMG and FML Sales Offices for Europe	10–7
FMAP Sales Offices for Asia, Australia, and Oceania	10–7
FMI/ECD Sales Representatives	10–8
FMI/ECD Sales Representatives (continued)	10–9
FMI/ECD Distributors	10–11

Section 11: Video Controller Compatibility Table – At A Glance	11–1
---	-------------

PDP Video Controller Compatibility Table	11–3
PDP Video Controller Manufacturer List	11–4

Section 12: Sales Information – At A Glance	12–1
--	-------------

Plasma Displays—Technical Description	12–3
Introduction	12–3
Memory Type	12–3
Plasma display panel structure	12–3
Principles of plasma display panel operation	12–4
Refresh Type	12–4
Plasma display panel structure	12–4
Operating principles of plasma display panel	12–6


Appendices — *At a Glance*

Appendix	Page
Plasma Displays—Technical Description	12-3
Introduction	12-3
Memory Type	12-3
Plasma Display Panel Structure	12-3
Principles of Plasma Display Panel	
Operation	12-4
Refresh Type	12-4
Operating Principles	12-6

Plasma Displays—Technical Description

Introduction

Plasma display panels are electronic display devices that use the luminescence produced by AC gas discharge. They can be classified as follows.

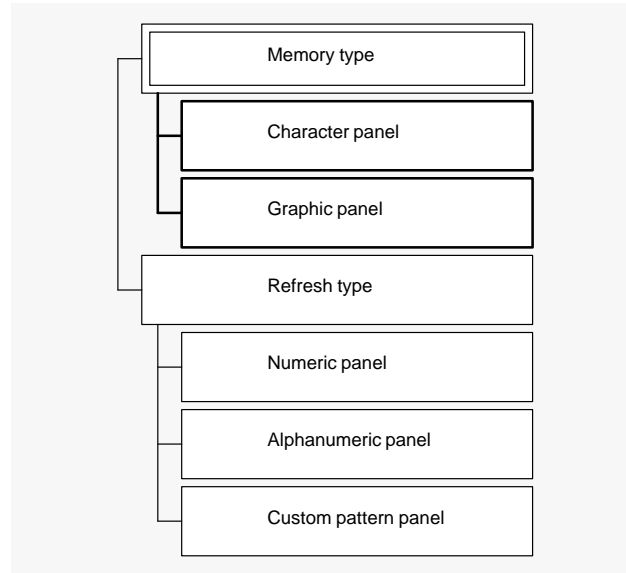

The memory type plasma display panel has a function to sustain its display, which ensures a bright display that is free from flicker, warp, and image burn-in.

Memory Type

Plasma display panel structure

Figure 1 shows the structure of the plasma display panel. A major feature is that line and column electrodes formed from two glass boards are covered by dielectrics and are completely protected. The glass boards are set very close to each other, the peripheral area is completely sealed with glass, and neon gas and a small concentration of one of the rare gases are mixed and sealed inside.

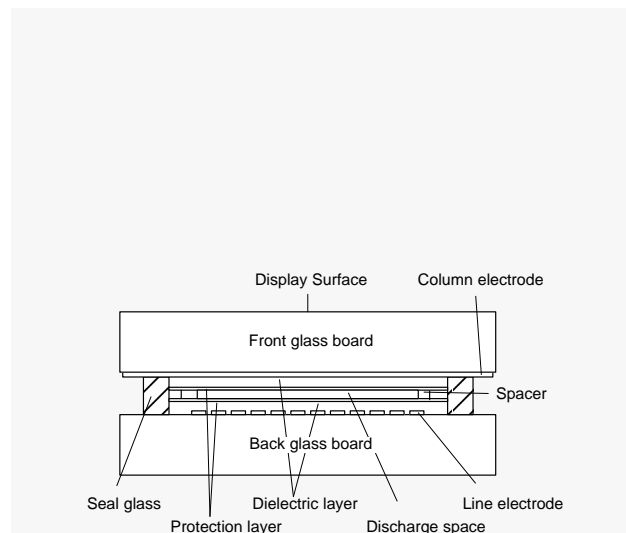


Figure 1. Structure of memory type plasma display panel

Principles of plasma display panel operation

When a gradually increasing voltage is applied between the line and column electrodes, the gas between them is ionized by the few charged particles there, a discharge current flows, and the dielectric plane covering the electrodes is charged (Figures 2a, 2b).

Since the charged voltage has the opposite polarity to the external voltage, voltage between the electrodes drops rapidly, gas ionization between the electrodes stops, and discharging stops. The voltage caused by charge left on the dielectric surface is called the wall voltage, and is retained for a long time.

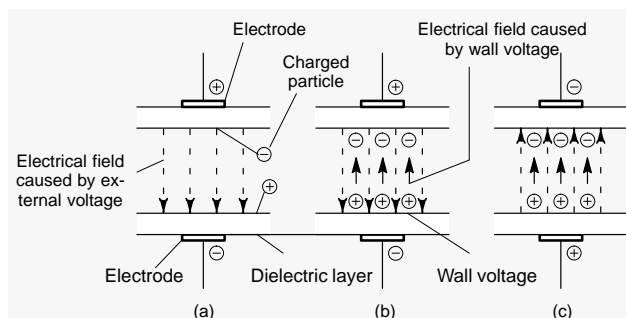


Figure 2. Basic operation principle of memory-type plasma display panel

When the polarity of the applied voltage is reversed, the wall voltage is added to the applied voltage, and the electrical field in the discharge space becomes stronger than during the first cycle. Thus, later discharge begins at a much lower applied voltage than at the first discharge (Figure 2c).

Figure 3 shows the basic voltage waveforms for driving the memory-type plasma display. Three pulsed power supplies (sustain pulse, write-in pulse, erasing pulse) are necessary to control or maintain the display.

The sustain voltage is maintained in an unchanging discharge state by setting it at a voltage which is higher than V_{sm} (the minimum sustain voltage) but lower than V_f (the voltage when firing begins).

The write-in and erasing pulses are applied to selected electrodes. In the write-in operation, when voltage is applied between the specified selected line and column electrodes and the voltage at the intersection exceeds V_f (firing voltage), discharge begins and continues after the write-in pulse has disappeared (because of the sustain pulse and wall voltage). The voltage does not exceed V_f at unselected electrodes and there is no discharge.

Erasing uses an extremely small pulse. As in the write-in pulse, it is applied between the selected row and column electrodes. The voltage is the same as V_s , but discharge during the erasing pulse is weak because the pulse is so narrow. The wall voltage is also low, so discharge cannot be continued on the following sustain pulse, and the display disappears.

Refresh Type

Plasma display panel structure

Figure 4 shows the basic structure of the refresh-type plasma display panel. The front glass board formed from the digit electrode (a transparent conducting film) protected by the dielectric layer and the back glass board formed from the segment electrode protected by the dielectric layer face each other. After the peripheral area has been sealed, neon gas is sealed inside the display. The refresh-type differs from the memory-type in that there is a layer of cells.

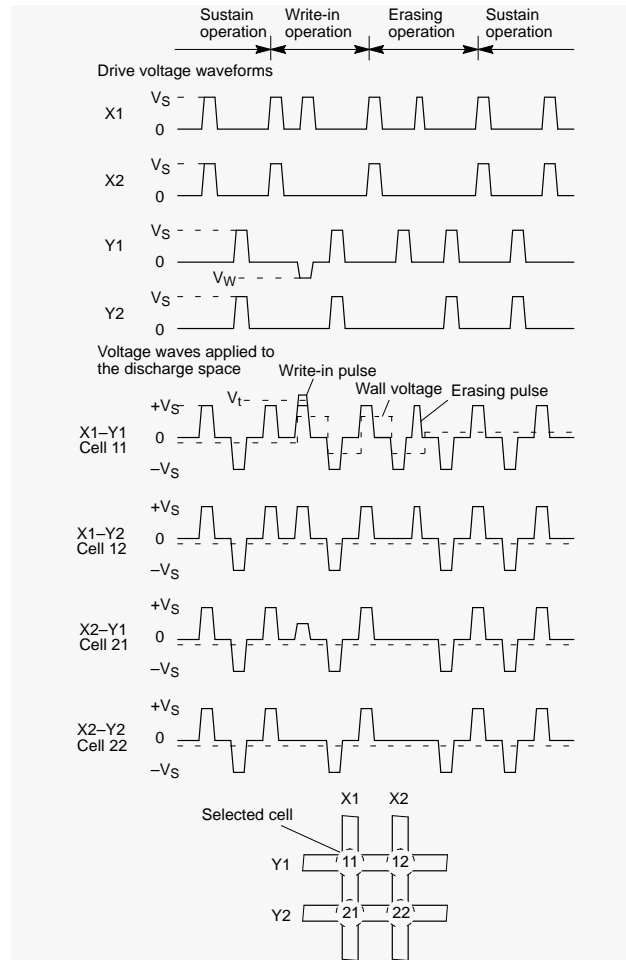


Figure 3. Drive voltage waveforms in memory-type plasma display panel

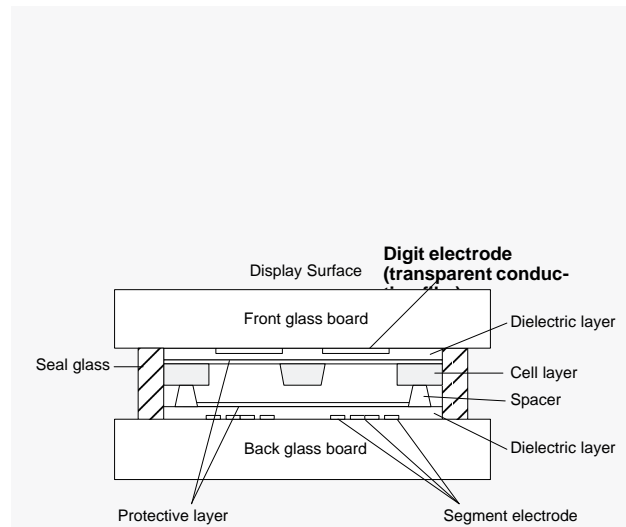


Figure 4. Structure of refresh type plasma display panel

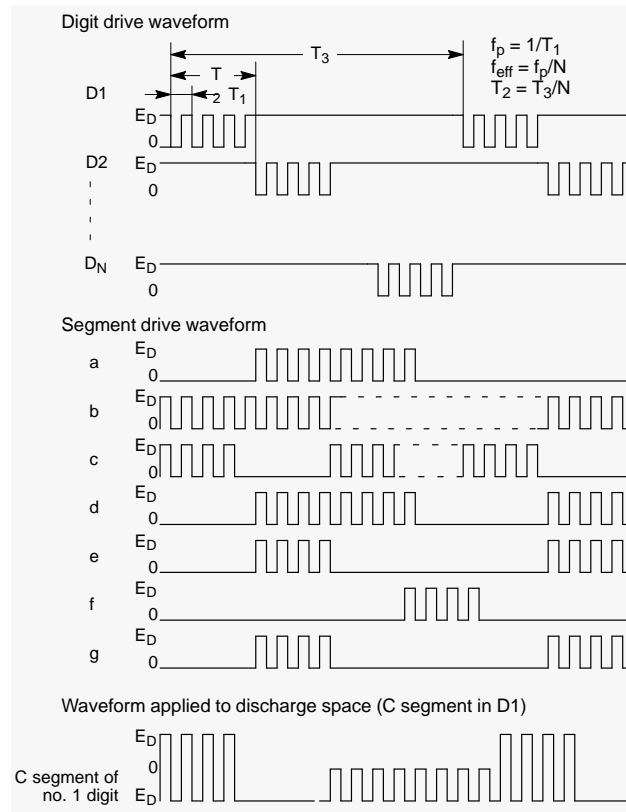


Figure 5. Drive voltage waveforms in refresh-type plasma display panel

Operating principles of plasma display panel

The operating principles of the refresh-type plasma display panel are slightly different to those of the memory-type plasma display.

Figure 5 shows the basic applied voltage waveforms.

A high-frequency drive voltage is applied between the digit electrode and the segment electrode, and discharge begins. The display lights when this exceeds the panel firing voltage. The intensity varies according to the drive pulse frequency.

The divided dynamic drive method is normally used in a display with many digits. The effective frequency for the digit electrode in this case is $f_{eff} = f_p/N$, where f_p is the power supply drive pulse frequency, and N is the number of digits. This is an important parameter in determining the intensity of the display.

The minimum drive voltage ($E_{Dmin.}$) is the lowest voltage at which the selected segments fire correctly, and the maximum drive voltage ($E_{Dmax.}$) is the highest voltage at which unselected elements glow. Consequently, the drive voltage (E_D) must be set between $E_{Dmax.}$ and $E_{Dmin.}$ to display data correctly.