

April 1993

The specifications for the **LT1029/LT1029A** have been revised as follows. Changes are indicated in **bold face**. For complete specifications, typical performance curves and applications information, please see the **LT1029/LT1029A** data sheet.

FEATURES

- **700 μ A** to 10mA Operating Current

DESCRIPTION

(2nd paragraph)


 Operating current range for the LT1029 is **700 μ A** to 10mA.

ELECTRICAL CHARACTERISTICS


PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Reverse Breakdown Change with Current	700μA \leq I_R \leq 10mA	●		2 3	5 8	mV mV

APPLICATIONS INFORMATION


Wide Trim Range (5%, -13%)



Narrow Trim Range



Trimming Output to 5.120V

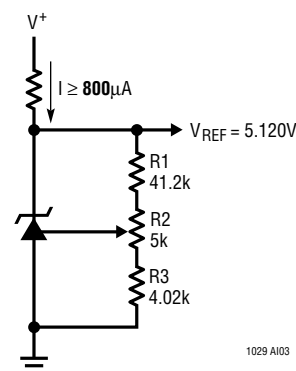

For further information regarding this specification notice contact:

 Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7487
 Attn: Product Marketing Manager
 Phone: (408) 432-1900